

T8 PC + Aluminium LED TUBE

8W (2FT) / 18W (4FT) / 25W (5FT)

Features:

- Impact resistant PC + Aluminium tube, high transmission, excellent light uniformity.
- High thermal conductivity / dissipation using aluminium 6063.
- Imported PC material, fireproof V0, anti-UV, not easy to deform, degrade and discoloration.
- Superior natural light and visual effect, frosted cover ensure anti-glare and soft light.
- Direct replace conventional T8 fluorescent lamp without replace its original fixture.
- Non-flickering, less strain on eye and smooth CCTV recording.
- Electric shock protection, no UV or IR radiation.


Applications:

Ideal for indoor application such as production area, warehouse, factory, shopping malls, exhibition halls, car park, residential, office, etc.




Specifications

| | |
|-----------------------|---|
| Model | VSL-LT08PCALT8-DE-V1 (8W) VSL-LT18PCALT8-DE-V1 (18W) VSL-LT25PCALT8-DE-V1 (25W) |
| Power | 8W / 18W / 25W |
| Lumen | 1,300lm / 2,900lm / 4,000lm |
| Efficiency | 160lm/W |
| Input Voltage | AC 85~265V |
| Frequency | 50/60Hz |
| PF | >0.95 |
| LED | EPISTAR 2835 |
| CCT | 3000K / 4000K / 6500K |
| CRI | >80Ra |
| Beam Angle | 120° |
| Rated Life | 50,000Hrs |
| Operating Temperature | -20°C ~ +45°C |
| Material | Polycarbonate (PC) Aluminium 6063 |
| Cover Type | Frosted |
| Lamp Socket | G13 |
| Dimension | Ø26x600mm / Ø26x1200mm / Ø26x1500mm |
| Wiring Type | Double-ended |
| Compliance | CE, RoHS, LM-80 |

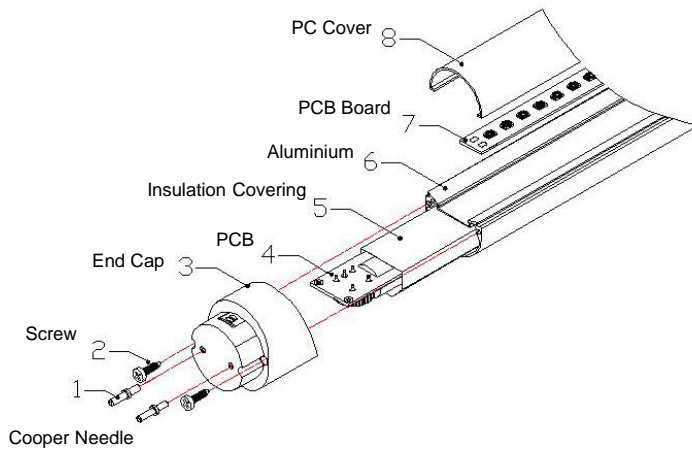


Photometric

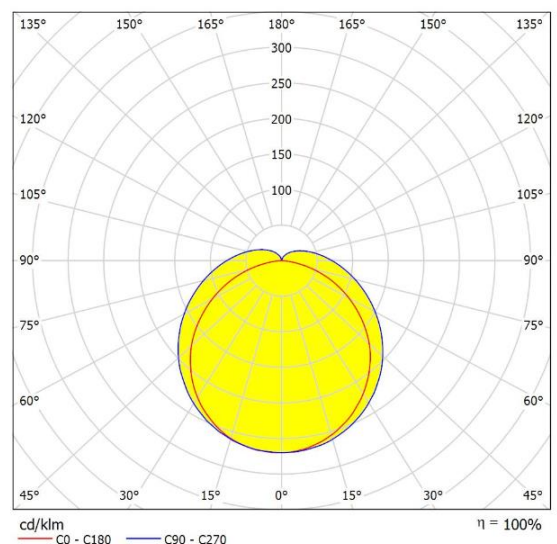

T8 PC + Aluminium LED TUBE

8W (2FT) / 18W (4FT) / 25W (5FT)


Dimension

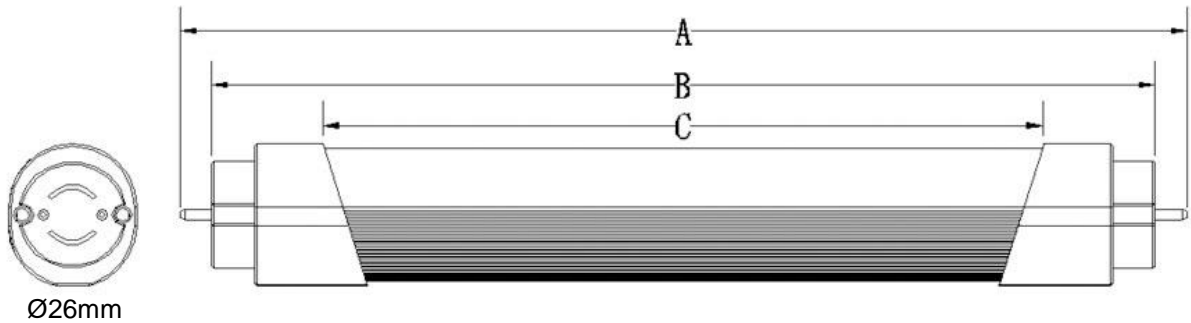


| Length | A | B | C |
|--------|--------|--------|--------|
| 0.6m | 602mm | 588mm | 551mm |
| 1.2m | 1212mm | 1198mm | 1161mm |
| 1.5m | 1512mm | 1498mm | 1461mm |

Wiring Installation Method

Method 1

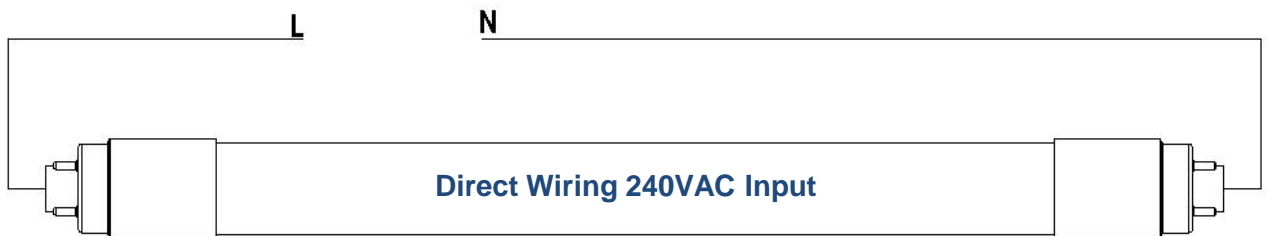

Method 2

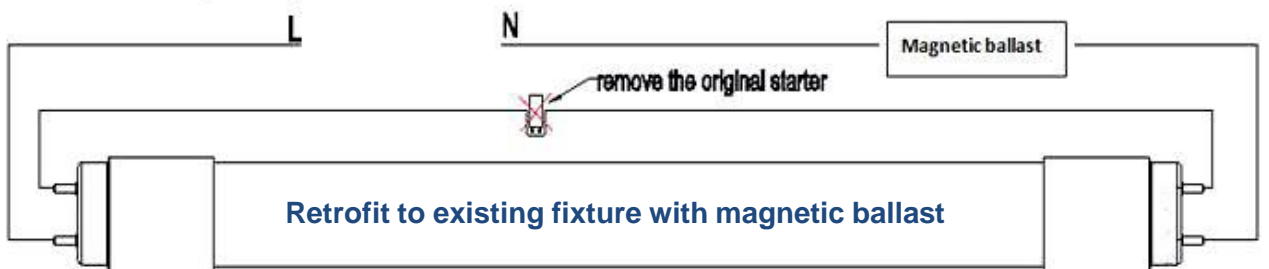

T8 PC + Aluminium LED TUBE



8W (2FT) / 18W (4FT) / 25W (5FT)

