

T5 PC + Aluminium LED TUBE



8W (2FT) / 18W (4FT) / 25W (5FT)



Features:

- Impact resistant PC + Aluminium tube, high transmission, excellent light uniformity.
- High thermal conductivity / dissipation using aluminium 6063.
- Imported PC material, fireproof V0, anti-UV, not easy to deform, degrade and discoloration.
- Superior natural light and visual effect, frosted cover ensure anti-glare and soft light.
- Direct replace conventional T8 fluorescent lamp without replace its original fixture.
- Non-flickering, less strain on eye and smooth CCTV recording.
- Electric shock protection, no UV or IR radiation.


Applications:

Ideal for indoor application such as production area, warehouse, factory, shopping malls, exhibition halls, car park, residential, office, etc.




Specifications

Model	VSL-LT08PCALT5-1E (8W) VSL-LT18PCALT5-1E (18W) VSL-LT25PCALT5-1E (25W)
Power	8W / 18W / 25W
Lumen	1,440lm / 3,240lm / 4,500lm
Efficiency	180lm/W
Input Voltage	AC 85~265V
Frequency	50/60Hz
PF	>0.95
LED	EPISTAR 2835
CCT	3000K / 4000K / 6500K
CRI	>80Ra
Beam Angle	120°
Rated Life	50,000Hrs
Operating Temperature	-20°C ~ +45°C
Material	Polycarbonate (PC) Aluminium 6063
Cover Type	Frosted
Lamp Socket	G5
Dimension	Ø22x549mm / Ø22x1149mm / Ø22x1449mm
Wiring Type	Double-ended
Compliance	CE, RoHS, LM-80

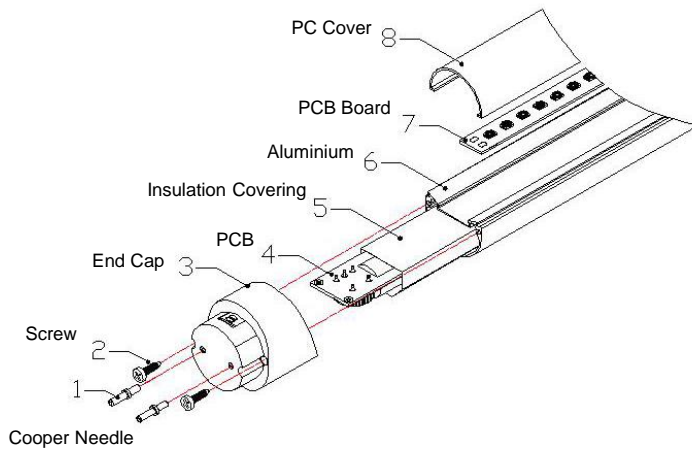


Photometric

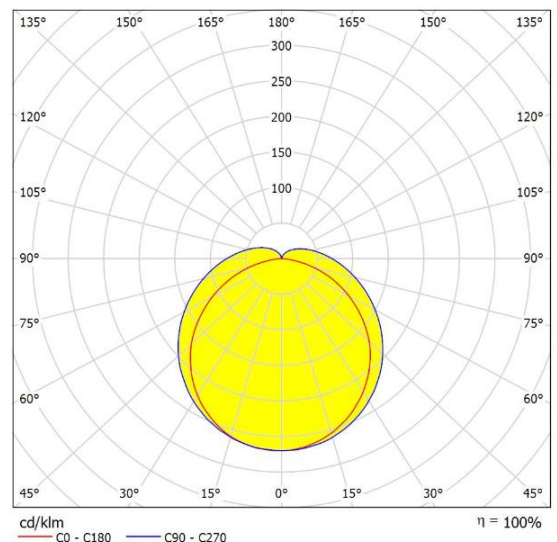

T5 PC + Aluminium LED TUBE

8W (2FT) / 18W (4FT) / 25W (5FT)


Dimension

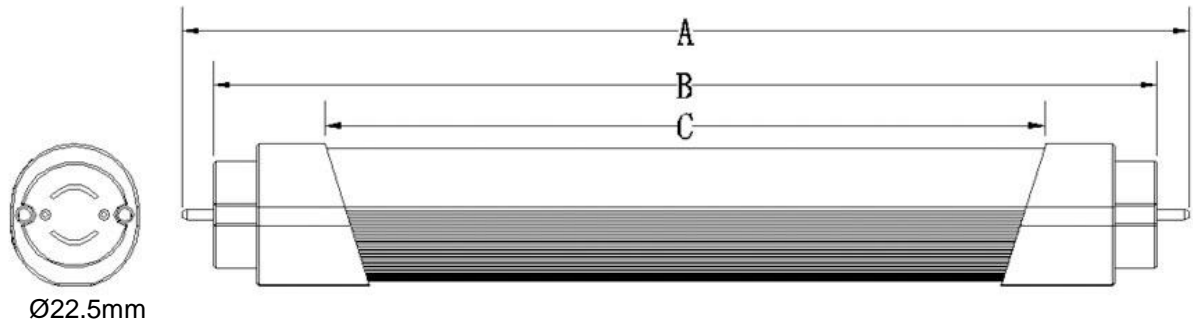

Length	A	B	C
0.6m	563mm	549mm	502mm
1.2m	1163mm	1149mm	1102mm
1.5m	1463mm	1449mm	1402mm

Wiring Installation Method

Method 1

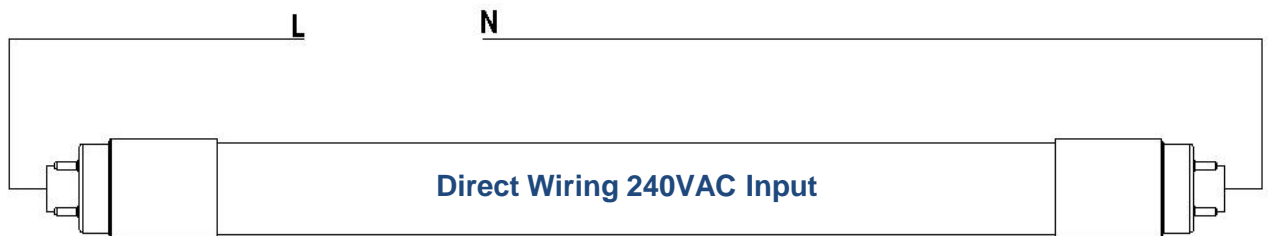

T5 PC + Aluminium LED TUBE



8W (2FT) / 18W (4FT) / 25W (5FT)

