


# Product datasheet

Specifications



## Category 5e 4 pair UTP Cable 305m

DCECAUTP4P3X

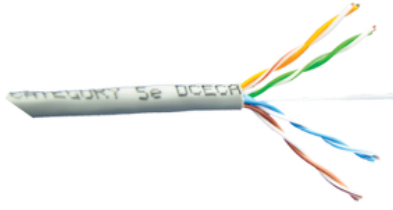

- ❗ Discontinued on: 16 November 2021
- ❗ End-of-service on: 16 November 2021

### Main

Product or component type	Copper cable
Cable shielding type	UTP
Communication network category	5e
Colour tint	Grey

### Complementary

Type of cable	4 twisted-pairs cable
Conductor material	Solid bare copper
Minimum return loss	20 dB 1 MHz 23 dB 4 MHz 24.5 dB 8 MHz 25 dB 10 MHz 25 dB 16 MHz 25 dB 20 MHz 24.3 dB 25 MHz 23.6 dB 31.25 MHz 21.5 dB 62.5 MHz 20.1 dB 100 MHz 19.4 dB 0.772 MHz
Attenuation	2 dB / 100 m at 1 MHz 4.1 dB / 100 m at 4 MHz 5.8 dB / 100 m at 8 MHz 6.5 dB / 100 m at 10 MHz 8.2 dB / 100 m at 16 MHz 9.3 dB / 100 m at 20 MHz 10.4 dB / 100 m at 25 MHz 11.7 dB / 100 m at 31.25 MHz 17 dB / 100 m at 62.5 MHz 22 dB / 100 m at 100 MHz
Attenuation to crosstalk ratio [ACR]	63 dB at 1 MHz 52 dB at 4 MHz 46 dB at 8 MHz 44 dB at 10 MHz 39 dB at 16 MHz 37 dB at 20 MHz 34 dB at 25 MHz 31 dB at 31.25 MHz 21 dB at 62.5 MHz 13 dB at 100 MHz
Power sum near-end crosstalk [PSNEXT]	62.3 dB at 1 MHz 53.3 dB at 4 MHz 48.8 dB at 8 MHz 47.3 dB at 10 MHz 44.3 dB at 16 MHz 42.8 dB at 20 MHz 41.3 dB at 25 MHz 39.9 dB at 31.25 MHz 35.4 dB at 62.5 MHz 32.3 dB at 100 MHz

<b>Near end crosstalk [NEXT]</b>	65.3 dB at 1 MHz 56.3 dB at 4 MHz 51.8 dB at 8 MHz 50.3 dB at 10 MHz 47.3 dB at 16 MHz 45.8 dB at 20 MHz 44.3 dB at 25 MHz 42.9 dB at 31.25 MHz 38.4 dB at 62.5 MHz 35.3 dB at 100 MHz
<b>Equal level far end crosstalk [ELFEXT]</b>	63.8 dB at 1 MHz 51.7 dB at 4 MHz 45.7 dB at 8 MHz 43.8 dB at 10 MHz 39.7 dB at 16 MHz 37.7 dB at 20 MHz 35.8 dB at 25 MHz 33.9 dB at 31.25 MHz 27.8 dB at 62.5 MHz 23.8 dB at 100 MHz
<b>Power sum equal level far end crosstalk [PSELFEXT]</b>	60.8 dB at 1 MHz 48.7 dB at 4 MHz 42.7 dB at 8 MHz 40.8 dB at 10 MHz 36.7 dB at 16 MHz 34.7 dB at 20 MHz 32.8 dB at 25 MHz 30.9 dB at 31.25 MHz 24.8 dB at 62.5 MHz 20.8 dB at 100 MHz
<b>Delay skew</b>	570 ns / 100 m at 1 MHz 552 ns / 100 m at 4 MHz 547 ns / 100 m at 8 MHz 545 ns / 100 m at 10 MHz 543 ns / 100 m at 16 MHz 542 ns / 100 m at 20 MHz 541 ns / 100 m at 25 MHz 540 ns / 100 m at 31.25 MHz 539 ns / 100 m at 62.5 MHz 540 ns / 100 m at 100 MHz
<b>Input impedance</b>	100 Ohm (+/- 6 %) at 1...100 MHz
<b>DC resistance</b>	72 Ohm
<b>Insulation resistance</b>	>= 500 mOhm/km500 V DC
<b>Nominal velocity propagation</b>	69 %
<b>Cable outer diameter</b>	5.1 mm
<b>Cable length</b>	305 m
<b>AWG gauge</b>	AWG 24
<b>Material</b>	PVC (polyvinyl chloride): jacket

## Environment

<b>Flame retardance</b>	V-0 conforming to UL 94
<b>Product certifications</b>	UL listed UL/ETL verified
<b>Standards</b>	ANSI/TIA-568-C.2 ISO/IEC 11801

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Weight</b>	10 kg
<b>Package 1 Height</b>	36 cm
<b>Package 1 width</b>	20 cm
<b>Package 1 Length</b>	37 cm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Contractual warranty

Warranty	18 months
----------	-----------