



APPLICATIONS


- Ideal for shopping malls, exhibition pavilions, hotel and home, etc.

CONSTRUCTION

- Polycarbonate coated aluminium housing
- Built-in constant current LED driver

FEATURES

- High energy efficiency
- Long-lifespan, energy saving

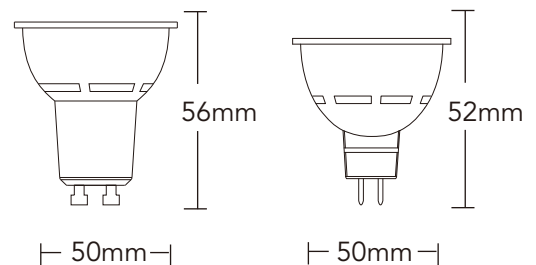

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Beam Angle	Base	Dimmable	Size (mm)	Life (hrs)	Packing QTY (pcs/CTN)
IWC-GU10C-5W	AC90-265V	5	400/410/420	≥80	38°	GU10	N	Φ50*56	25000	200
IWC-GU10C-7W	AC90-265V	7	600/610/620	≥80	38°	GU10	N	Φ50*56	25000	200
IWC-MR16E-5W	AC90-265V	5	350/360/370	≥80	38°	GU5.3	N	Φ50*52	25000	200
IWC-MR16E-7W	AC90-265V	7	600/610/620	≥80	38°	GU5.3	N	Φ50*52	25000	200