

UNO Down Light



The new standard range of LED UNO Recessed Downlight. There are a selection of sizes and 3 color temperature switchable options to meet customer requirements. With this range of down light can be upgraded in key segments such as office, commercial buildings, retail back office, hospitality. Easy choice to make switch to LED and benefit from energy saving and longer life time.

Specification : UNO Recessed Downlight (Back-Lit)

LED & Optical

- Output Range : 600 – 1600lm
- Photometric Options : 110 degree
- System Efficacy : up to 90LPW
- CCT : 3000K/4000K/5700K Switchable
- Operation Temp : -10 ~ 40°C

Electrical

- Input voltage : 220-240V
- Input Frequency : 50/60Hz
- Power Factor >0.5

Applications

- Commercial Building
- Convenience Store
- Office
- Household

Warranty

- Rated Life : 25khrs
- Warranty : 2 Years
- Certification : CB certified


Order Logic:

Product ID	Sizes	CCT	Wattage	Type
UNRR - UNO Down Light Recessed Round	4D/6D/8D - 4"/6"/8"	3CCT - 3000K/4000K/5700K	7W/14W/18W	BL - Back Lit

SKU# & Order Description:

SKU#	Description	Watt (W)	CCT (K)	Lumens	Voltage	P.F	LPW	Beam Angle	CRI	Mounting	Dimension	Cut Out Size	Qty/Ctn
93133839	UNORR4D3CCT7W-BL	7	3CCT	600	220 - 240	> 0.5	86	110°	80	Recessed	Ø110 x 46	Ø105	10pcs/Box
93133840	UNORR6D3CCT14W-BL	14	3CCT	1200	220 - 240	> 0.5	93	110°	80	Recessed	Ø165 x 48.5	Ø155	10pcs/Box
93133841	UNORR8D3CCT18W-BL	18	3CCT	1600	220 - 240	> 0.5	89	110°	80	Recessed	Ø220 x 50	Ø205	8pcs/Box

Dimension:

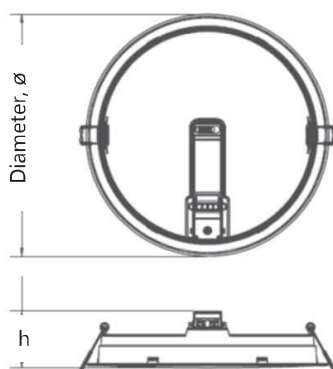

Recessed
(Back Lit)

Photometric:

