




Features

- Material: Glass
- Fast & easy direct retrofit to magnetic system.
- Fully Illuminates fixture : 200 degree.
- Rated Life : 15khrs


Applications

- Office
- Commercial Building

Wiring Diagram

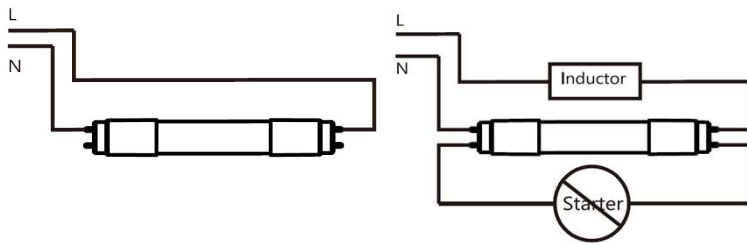

Photometric

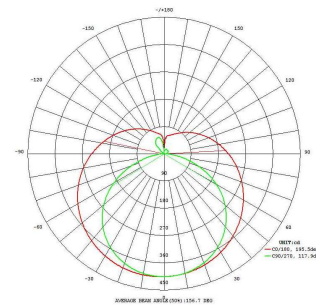

SKU#	Product Description	Power (W)	Volts (V)	Luminous (lm)	Length (mm)	CCT (K)	CRI Ra	Life time (hrs)	Qty/ Carton
93160915	DG 10W/T8 600mm/730/220-240V/DS	10	220-240	850	600	3000	70	15,000	20
93160916	DG 10W/T8 600mm/740/220-240V/DS	10	220-240	900	600	4000	70	15,000	20
93160917	DG 10W/T8 600mm/765/220-240V/DS	10	220-240	900	600	6500	70	15,000	20
93160918	DG 20W/T8 1200mm/730/220-240V/DS	20	220-240	2000	1200	3000	70	15,000	20
93160919	DG 20W/T8 1200mm/740/220-240V/DS	20	220-240	2100	1200	4000	70	15,000	20
93160920	DG 20W/T8 1200mm/765/220-240V/DS	20	220-240	2100	1200	6500	70	15,000	20