



PRODUCT CATALOGUE

ISSUE DATE: JULY 2022





11W



15W




22W



30W

Perkunas


T8 LED GLASS TUBE

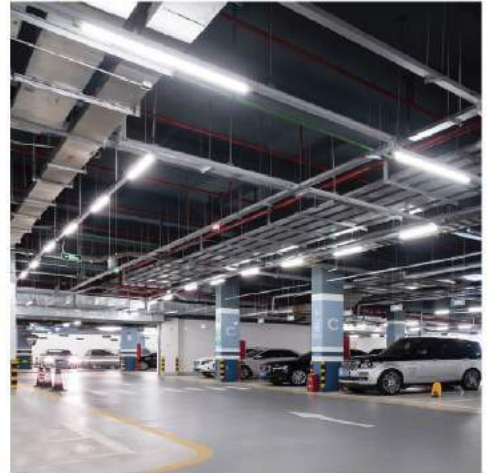

**All pictures shown are for illustration purpose only*

The most commonly used type today, generally used in general lighting, office buildings, shopping malls, restaurants, schools, homes, factories and other indoor lighting.

SPECIFICATION:	11W	15W	22W	30W
COLOUR	6500K/4000K/3000K	6500K	6500K/4000K/3000K	6500K
SIZE	600MM (2FT)	600MM (2FT)	1200MM(4FT)	1200MM(4FT)
LUMENS	1000LM	1500LM	2000LM	3500LM
INPUT VOLTAGE	220-240V	220-240V	220-240V	220-240V
DIFFUSOR MATERIAL	GLASS	GLASS	GLASS	GLASS
BASE MATERIAL	PVC	ALUMINIUM	PVC	ALUMINIUM
LAMP BEAD TYPE	2835	2835	2835	2835
LAMP BEAD QTY TOTAL	120°	120°	120°	120°
CRI	≥70	≥70	≥70	≥70
POWER FACTOR	0.5	0.5	0.5	0.5
DRIVER LIFETIME	25000HR	25000HR	25000HR	25000HR
PACKING	30/CTN	30/CTN	30/CTN	30/CTN

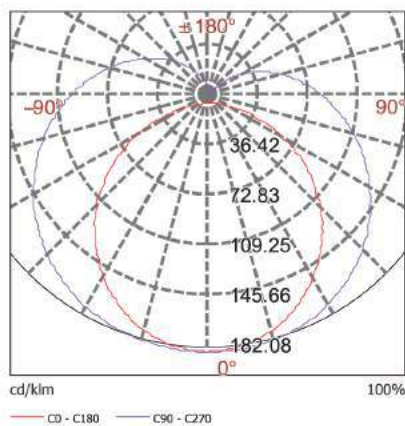

120°



220-240V



Non Dimmable

Perkunas

T5 LED C/S BRACKET FITTING



5W




9W



14W



18W

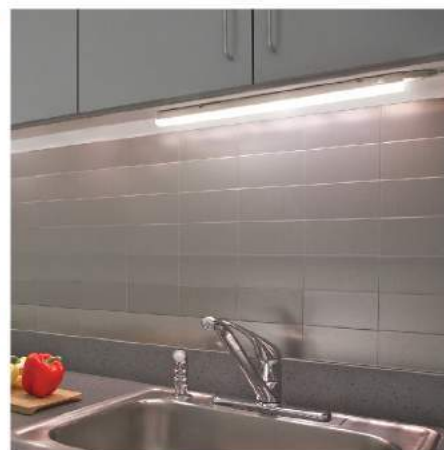

**All pictures shown are for illustration purpose only*

T5 LED tube light is the led tube with 5/8-inch diameter, which is mainly used in lighting scenes such as factories, warehouses, supermarkets, and offices. It is also widely used for home decor, like living room, kitchen.

SPECIFICATION:	5W	9W	14W	18W
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
SIZE	286MM (1FT)	571MM (2FT)	871MM (3FT)	1171MM (4FT)
LUMENS	504LM	810LM	1260LM	1620LM
INPUT VOLTAGE	220-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz
BEAM ANGLE	>80°	>80°	>80°	>80°
CRI	≥70	≥70	≥70	≥70
LIFE TIME	25000HR	25000HR	25000HR	25000HR
PACKING	50/CTN	50/CTN	50/CTN	50/CTN

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

A+ **A+** **A** **B** **C** **D** **E**

LED

The lamps cannot be changed in the luminaire.

874/2012

Diluluskan Oleh / Approved by:





RED



YELLOW



PURPLE



BLUE



GREEN




6500K/4000K/3000K



RGB

Perkūnas

T8 LED WEATHERPROOF TUBE (IP65)

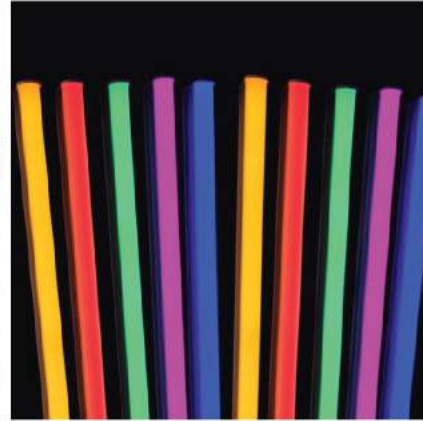


**All pictures shown are for illustration purpose only*

Able to sustain under raining condition, integrated wire with tube together for weatherproof / waterproof purpose. Suitable for outdoor decoration purpose.

SPECIFICATION:

COLOUR	6500K/4000K/3000K/RED/BLUE/YELLOW/GREEN/PURPLE/RGB
INPUT VOLTAGE	AC220-240V 50-60Hz
BEAM ANGLE	120°
CRI	>70
IP RATING	IP65
LIFETIME	30000HR
PACKING	30/CTN

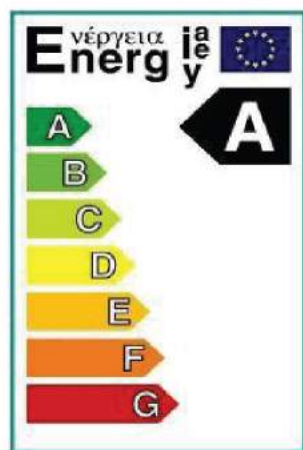

Perkunas

LINEAR OFFICE FITTING ONLY





1 X 4FT
(WHITE / BLACK)



2 X 4FT
(WHITE / BLACK)



3 X 4FT
(WHITE / BLACK)

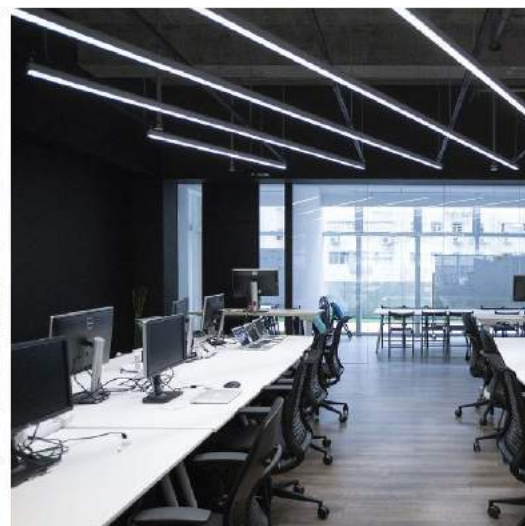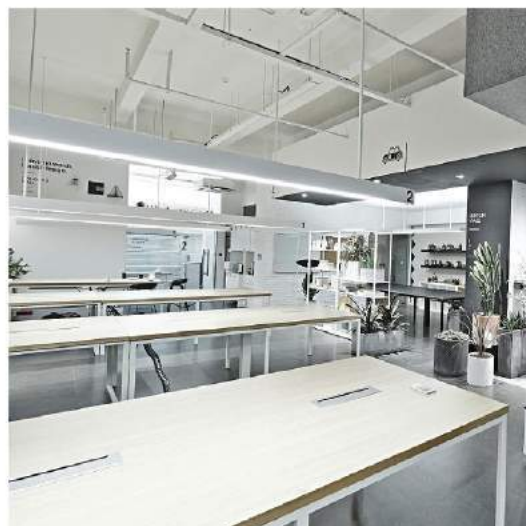

*All pictures shown are for illustration purpose only

The demand for LED Linear lighting is now huge and continues to grow. Linear architectural lighting and LED technology has broadened the applications of commercial LED linear fixtures. The industry continues to evolve with improvements in aesthetics and performance, moving away from the old, traditional housings, utilising materials in a better way and incorporating more advanced technology.

SPECIFICATION:	1 X 18W 4FT	2 X 18W 4FT	3 X 18W 4FT
SIZE	1233MM*60MM*53MM	1233MM*100MM*53MM	1233MM*175MM*53MM
COLOUR	BLACK/WHITE	BLACK/WHITE	BLACK/WHITE
COMPATIBLE WITH	LED T8 TUBE	LED T8 TUBE	LED T8 TUBE
INPUT VOLTAGE	AC150-265V 50-60Hz	AC150-265V 50-60Hz	AC150-265V 50-60Hz
MATERIAL	IRON+POLYCARBONATE	IRON+POLYCARBONATE	IRON+POLYCARBONATE
IP RATING	IP20	IP20	IP20
PACKING	16/CTN	12/CTN	4/CTN



Installed by Hanging



Installed by Surface mounted



For LED T8 G13



Ingress Protection 20



PAP


Perkunas

T8 LED CASING (PIPE IN)



**All pictures shown are for illustration purpose only*

SPECIFICATION:	1 X 2FT	1 X 4FT	2 X 4FT
SIZE	H 61MM X W 33MM	H 61MM X W 33MM	H 55MM X W 100MM
SUITABLE WITH	LED TUBE	LED TUBE	LED TUBE
PACKING	50/CTN	50/CTN	50/CTN

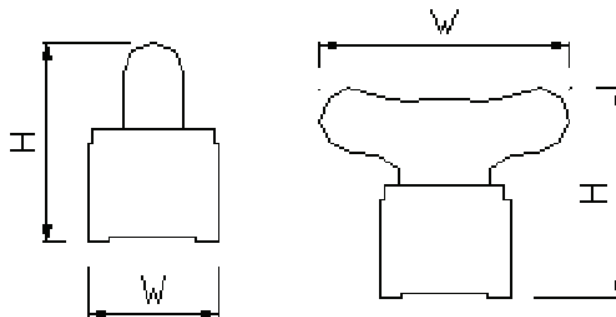

1 X 2FT



1 X 4FT



2 X 4FT

Perkunas

T8 LED CASING (SLIM TYPE)




1 X 2FT



1 X 4FT




2 X 4FT

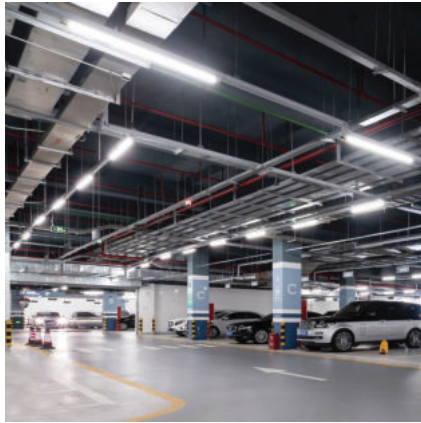

**All pictures shown are for illustration purpose only*

SPECIFICATION:	1 X 2FT	1 X 4FT	2 X 4FT
SIZE	H 50MM X W 34MM	H 50MM X W 34MM	H 50MM X W 71MM
SUITABLE WITH	LED TUBE	LED TUBE	LED TUBE
PACKING	50/CTN	50/CTN	50/CTN

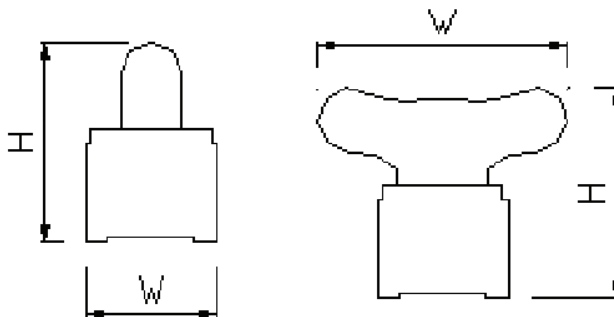



5W A45



10W A60



15W A70



21W A80



25W A90

Perkunas


A SERIES LED BULB



**All pictures shown are for illustration purpose only*

The A Series or Arbitrary Series Lamps are one of the basic light bulb shapes. It is one of the commonly used light bulb shapes for general lighting. The A Series Bulbs are used in general purpose residential lighting, kitchen lights, porch lights, bathroom and closet lights.

SPECIFICATION:	5W A45	10W A60	15W A70	21W A80	25W A90
SIZE	45MM*85MM	60MM*109MM	70MM*129MM	80MM*140MM	90MM*168MM
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
LUMENS	500LM	1000LM	1500LM	2100LM	2500LM
INPUT VOLTAGE	AC165-265V	AC165-265V	AC165-265V	AC165-265V	AC165-265V
BEAM ANGLE	200	200	200	200	200
CRI	>80	>80	>80	>80	>80
IP RATING	IP20	IP20	IP20	IP20	IP20
LIFE TIME	20000HR	20000HR	20000HR	20000HR	20000HR
PACKING	100/CTN	100/CTN	100/CTN	100/CTN	100/CTN

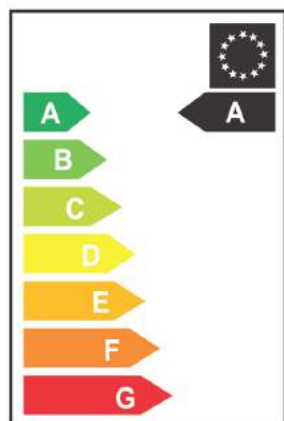

Diluluskan Oleh / Approved by:





Perkūnas


A60 10W LED DIMMABLE LAMP BULB



**All pictures shown are for illustration purpose only*

Delivers a dimmable glow effect for a welcoming, warm atmosphere, making it ideal for general lighting applications in the hospitality industry. They are particularly suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. They can be used together with dimmer switch, enabling further efficiencies while helping to create the desired atmosphere.

SPECIFICATION:	10W
COLOUR	6500K/4000K/3000K
SIZE	60MM*115MM
LUMENS	1000LM
INPUT VOLTAGE	AC220-240V 50-60Hz
BEAM ANGLE	230°
CRI	>80
IP RATING	IP20
LIFE TIME	30000HR
PACKING	100/CTN

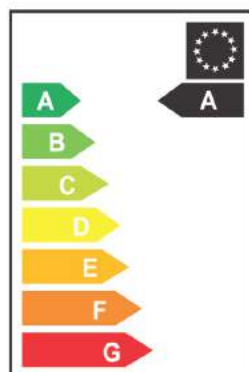



Perkinas


C38 5W LED CANDLE BULB



**All pictures shown are for illustration purpose only*

Designed to replace incandescent candles, available for an array of applications, such as chandeliers, candle stands, decorative lighting and general lighting.

SPECIFICATION:	C38 5W E14 CANDLE BULB
SIZE	38MM*100MM
COLOUR TEMPERATURE	6500K/4000K/3000K
LUMENS	350LM
INPUT VOLTAGE	AC185-265V 50-60Hz
BEAM ANGLE	250
CRI	>80
LIFE TIME	20000HR
PACKING	100/CTN

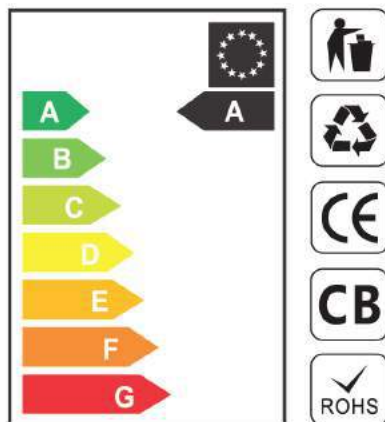

Perkūnas

G45 3W LED COLOUR BULB



6500K / 3000K



3000K
(TRANSPARENT)



RED



YELLOW



BLUE



GREEN




**All pictures shown are for illustration purpose only*

These bulbs are perfect for numerous applications. You can use them as foyer lights, kitchen lights, chandeliers, and ornamental fixtures.

SPECIFICATION:

SIZE	45MM*70MM
COLOUR	6500K/4000K/3000K/RED/YELLOW/BLUE/GREEN
LUMENS	280LM
INPUT VOLTAGE	AC165-265V 50/60Hz
LIFE TIME	20000HR
PACKING	200/CTN

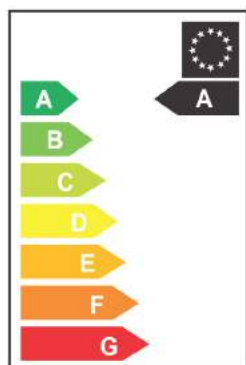

E27



B22



RED



YELLOW



BLUE



GREEN



PURPLE

Perkunas


A60 10W LED COLOUR BULB



**All pictures shown are for illustration purpose only*

A60 LED color bulb brings smart lighting for your daily living. Retrofit into any lamp shade to create the ambience, suitable for home and commercial decoration.

SPECIFICATION:	
COLOUR	RED/YELLOW/BLUE/GREEN/PURPLE
INPUT VOLTAGE	AC165-265V 50/60Hz
LUMENS	1000LM
LIFE TIME	20000HR
PACKING	100/CTN



E27



B22

Perkunas

LED STICK BULB



Diluluskan Oleh / Approved by:



E27 10W



Diluluskan Oleh / Approved by:



E27 15W



PLC 10W




PLC 15W



**All pictures shown are for illustration purpose only*

LED stick bulbs with are often used in oyster lights, ceiling fan lights, and certain types of downlights. The compact size of these light bulbs makes them easy to fit where standard shaped E27 LED bulbs cannot.

SPECIFICATION:	E27 10W	E27 15W	PLC 10W	PLC 15W
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
SIZE	37 X 113MM	45 X 132MM	37 X 113MM	45 X 132MM
LUMENS	860LM	1425LM	860LM	1425LM
INPUT VOLTAGE	AC220-240V 50/60HZ	AC220-240V 50/60HZ	AC220-240V 50/60HZ	AC220-240V 50/60HZ
LIGHTING ANGLE	200°	200°	200°	200°
CRI	80	80	80	80
WORKING TEMPERATURE	-20°C-50°C	-20°C-50°C	-20°C-50°C	-20°C-50°C
PF	>0.5	>0.5	>0.5	>0.5
LIFE TIME	20000 HRS	20000 HRS	20000 HRS	20000 HRS
PACKING	100/CTN	100/CTN	100/CTN	100/CTN

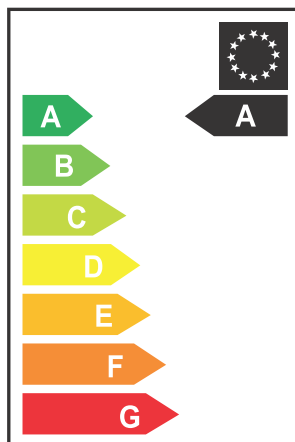



8W PAR20



13W PAR30



18W PAR38

Perkunas


LED PAR LAMP



**All pictures shown are for illustration purpose only*

PAR LED bulb work well in applications where directional light is needed, such as in spotlights or retail displays. This is the type of lighting used in theater, and it is also sometimes used to light exterior landscaping features.

SPECIFICATION:	8W PAR20	13W PAR30	18W PAR38
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K/RED/BLUE/GREEN
SIZE	62.5MM*87MM	95MM*100MM	120MM*130MM
LUMENS	800LM	1300LM	1800LM
INPUT VOLTAGE	AC185-265V 50-60Hz	AC185-265V 50-60Hz	AC185-265V 50-60Hz
LIFE TIME	20000HR	20000HR	20000HR
PACKING	50/CTN	20/CTN	20/CTN

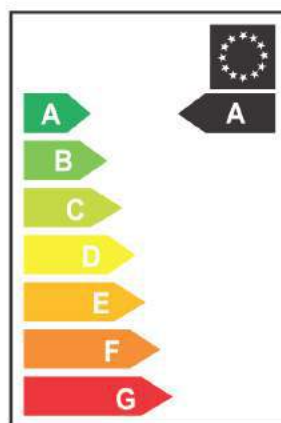



Diluluskan Oleh / Approved by:



GU10



MR16

Perkunas


LED GU10 & MR16 LAMP BULB



**All pictures shown are for illustration purpose only*

The MR16 and GU10 bulbs are commonly seen in residential and commercial downlight and spot light applications. Retail lighting applications tend to use narrower beam angles of less than 45° to create accent lighting or highlighting of products.

SPECIFICATION:	GU10	MR16
SIZE	50MM*56MM	50MM*56MM
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K
LUMENS	720LM	720LM
WORKING TEMPERATURE	-20°C - 50°C	-20°C - 50°C
LIGHTING ANGLE	38°	38°
PF	>0.5	>0.5
LIFE TIME	20000HR	20000HR
PACKING	100/CTN	100/CTN

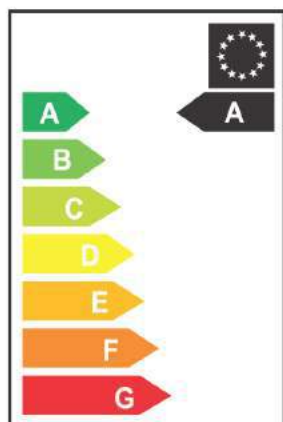



LED TRACK LIGHT FITTING AND TRACK RAIL



BLACK



WHITE



1M / 2M / 3M
(20/CTN)



**All pictures shown are for illustration purpose only*

BENEFITS OF TRACK LIGHTING

1. Versatile Application

Track lights can be used to illuminate every space from a dark hallway to an office, to a cozy living room, or highlight beautiful artwork and family photos. There is no specific function or place for track lighting; with endless applications, they're an easy choice for any room in your home.

2. Non-Invasive Installation

One of the biggest benefits of track lighting is its easy installation. If you are using tracks to replace an existing light fixture, no complex installations or new electrical boxes are required. This simple upgrade allows you to increase the light in your room dramatically without difficult electrical work or cutting into your ceiling.

3. Simple to Adjust

Track lighting allows you to make a number of quick and easy changes to your lighting environment. For instance, if you redecorate and move your centerpiece dining room table, you can also adjust your track heads along the length of the track to better illuminate your new setup.

4. Perfect for LED Bulbs

When it comes to selecting bulbs for your track fixture, LEDs are your best option. Lighting experts strongly recommended using LED bulbs with track lights because they are available in various beam spreads, lumens, sizes, and color temperatures. LED bulbs are most important when highlighting artwork because their low heat output will prevent damage to valued art.

Lasting up to 50,000 hours with 70 percent savings in energy cost, LED bulbs are the future of lighting. Switch to LED bulbs for a long-lasting light source that will save you money without compromising on light-output or style.

5. The Best Size for Every Home

Tracks are available in lengths of 2, 4, 6, and 8 feet and can be connected or cut to create any length. To further accommodate the needs of your home, track heads are produced in a wide range of sizes. For lower ceilings, it is best to opt for a sleek, small track head, and for high or vaulted ceilings, large, powerful track heads are recommended

6. Customizable Style

With so many varieties of track lights, from minimalist to eccentric, you're certain to find a style that fits your personal taste. Contrary to preconceptions, track lighting does not have to be clunky, outdated spotlights or industrial tracks often seen in retail locations. The vast selection of track lighting options includes sleek track heads and pendants that are easy to incorporate into any home.

SPECIFICATION :		
COLOUR	BLACK	WHITE
SIZE	93*55*150	93*55*150
TYPE	TRACK RAIL	TRACK RAIL
SUITABLE WITH	GU10 LED BULB	GU10 LED BULB
PACKING	100/CTN	100/CTN

Perkunas


LED 6W COB EYE BALL FITTING



**All pictures shown are for illustration purpose only*

Generally apply at residential, commercial, restaurant, office and cafe, example dining hall, living room, bedroom, hotel lobby, kitchen, gym room and meeting room.

SPECIFICATION	
COLOUR	6500K/4000K/3000K
LUMEN	400lm
INPUT VOLTAGE	AC220-240V-50/60Hz
SIZE	90MM X 25MM
LIFETIME	20,000HRS
CUT OUT HOLE	Φ75MM
PACKING	100/CTN

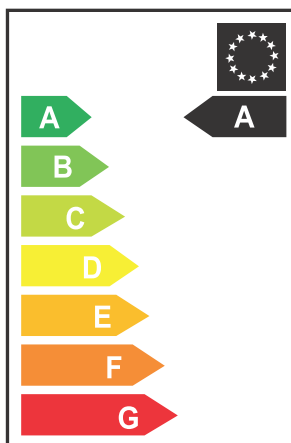

Perkunas

LED PANEL LIGHT





**All pictures shown are for illustration purpose only*

Panel lights are used residentially and commercially and replace traditional fluorescent ceiling lights. Kitchens, bathrooms and living rooms are all popular choices for using panel lights but they can be used in any room around the home, even hallways.

SPECIFICATION:	12W ROUND / SQUARE	18W ROUND / SQUARE	24W ROUND / SQUARE
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
SIZE	140MM*28MM (4 INCHES)	180MM*30MM (6 INCHES)	220MM*32MM (8 INCHES)
DIFFUSOR MATERIAL	PS	PS	PS
DRIVER LIFETIME	25000HR	25000HR	25000HR
INPUT VOLTAGE	220V-50Hz	220V-50Hz	220V-50Hz
LAMP BEAD TYPE	2835 3V	2835 3V	2835 3V
LAMP BEAD QUANTITY TOTAL	110°	110°	110°
LUMINOUS FLUX	960LM	1440LM	1920LM
POWER FACTOR	0.5	0.5	0.5
BASE MATERIAL	FE	FE	FE
INPUT CURRENT	95MA	95MA	95MA
CRI	≥70	≥70	≥70
PCB MATERIAL	PC	PC	PC
IP RATE	IP20	IP20	IP20
PACKING	60/CTN	60/CTN	40/CTN



Diluluskan Oleh / Approved by:

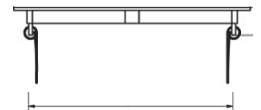

12W Ø110MM
18W Ø145MM
24W Ø175MM

12W 110MM
18W 145MM
24W 175MM



Perkunas


LED KITCHEN LAMP (SURFACE PANEL LIGHT)



**All pictures shown are for illustration purpose only*

LED Surface Panel are used as a down lighter in order to create the perfect ambience. When it comes to any interior décor and lighting, the LED panel design creates the bold and stylish finish any space would require. Small and compact, they can be placed in locations to offer maximum illumination, especially as down lighters. Suitable for being installed on normal ceilings and do not require any special concealers like false ceilings. It's suitable for Old Homes, Modern Homes, Kitchen, Office Lobby, parking spaces, lobbies and balconies.

SPECIFICATION:	12W ROUND/SQUARE	18W ROUND/SQUARE	24W ROUND/SQUARE
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
SIZE	173*35 (6 INCHES)	225*35 (8 INCHES)	289*37 (12 INCHES)
LUMENS	1080LM	1620LM	2160LM
INPUT VOLTAGE	AC220-240V 50-60Hz	AC220-240V 50-60Hz	AC220-240V 50-60Hz
BEAM ANGLE	120°	120°	120°
RA	>80	>80	>80
POWER FACTOR	0.5	0.5	0.5
IP RATING	IP20	IP20	IP20
LIFE TIME	25000HRS	25000HRS	25000HRS
PACKING	40/CTN	40/CTN	20/CTN

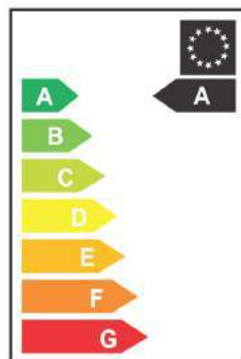

Diluluskan Oleh / Approved by:



LED





30W



50W



100W



150W



200W


Perkunas LED FLOODLIGHT



**All pictures shown are for illustration purpose only*

LED Flood Lights are wide angle lights designed to cover a large area or "flood" the area with light. Now powered by efficient LED technology, these lights are suitable for yard, parking lot, retail stores, warehouses and storage.

SPECIFICATION:	30W	50W	100W	150W	200W
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
SIZE	162MM*183MM*38MM	192MM*225MM*38MM	245MM*280MM*50MM	270MM*315MM*53MM	350MM*300MM*55MM
LUMENS	3000LM	5000LM	10000LM	15000LM	20000LM
INPUT VOLTAGE	AC100-240V 50-60Hz	AC100-240V 50-60Hz	AC100-240V 50-60Hz	AC100-240V 50-60Hz	AC100-240V 50-60Hz
BEAM ANGLE	90°	90°	90°	90°	90°
RA	>70	>70	>70	>70	>70
POWER FACTOR	0.9	0.9	0.9	0.9	0.9
IP RATING	IP66	IP66	IP66	IP66	IP66
LIFE TIME	20000HR	20000HR	20000HR	20000HR	20000HR
OPERATING TEMP	-20°C - 40°C	-20°C - 40°C	-20°C - 40°C	-20°C - 40°C	-20°C - 40°C
PACKING	20/CTN	10/CTN	10/CTN	5/CTN	5/CTN

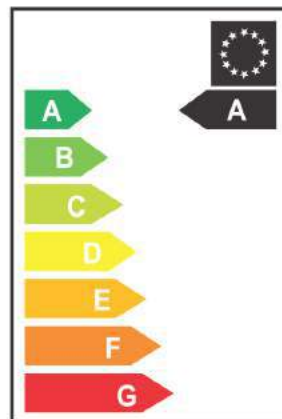

Diluluskan Oleh / Approved by:




Perkunas

HIGH POWER LED FLOODLIGHT




**All pictures shown are for illustration purpose only*


LED Flood Lights are wide angle lights designed to cover a large area or "flood" the area with light. Now powered by efficient LED technology, these lights are suitable for yard, parking lot, retail stores, warehouses and storage.

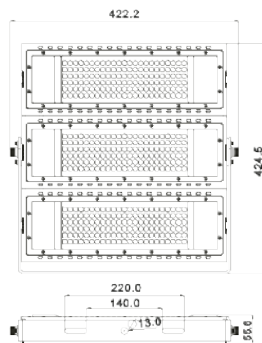


300W

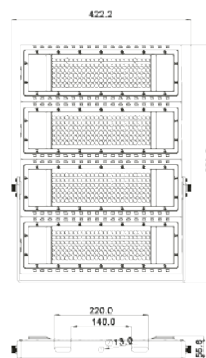


400W

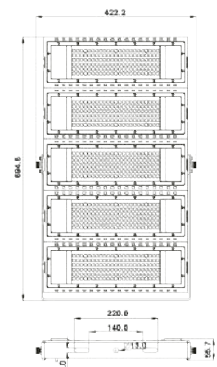


500W

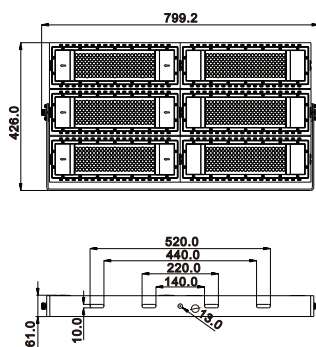

600W

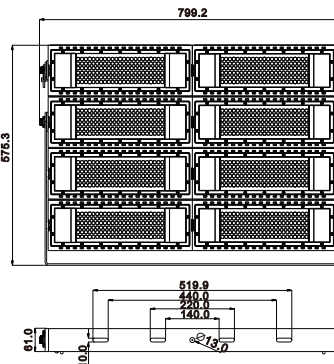

800W

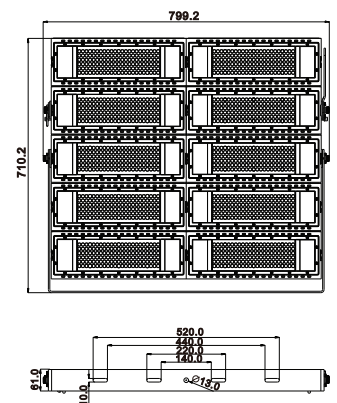

1000W

Product Specification

Rated Power	Luminous Flux	Net Weight	Amount per Carton	Maximum Projected Area
300W	WW:28500LM/NW:30000LM/PW:31500LM	5.7KG	1PCS	0.179M ²
400W	WW:38000LM/NW:40000LM/PW:42000LM	7.25KG	1PCS	0.236M ²
500W	WW:47500LM/NW:50000LM/PW:52500LM	9.2KG	1PCS	0.293M ²
600W	WW:57000LM/NW:60000LM/PW:63000LM	11.65KG	1PCS	0.340M ²
800W	WW:76000LM/NW:80000LM/PW:84000LM	15.4KG	1PCS	0.459M ²
1000W	WW:95000LM/NW:100000LM/PW:105000LM	19.0KG	1PCS	0.567M ²

The Standard Parameter of Floodlight

CCT	6500K
CRI	Ra70
Input voltage	220VAC
Frequency	50Hz
power Factor	≥0.9
Ambient temperature	-30℃~45℃
Ambient humidity	5%~95%
Storage Temperature	-40℃~70℃
beam angle	25°/60°/90°
Service Life(h)	≥35000
IP Grade	IP66
Installation	Stand Style Installation
Main material	Aluminum Alloy+PC+toughened glass
Mounting height	3~50m

Perkunas


LED COLOUR FLOODLIGHT



50W



50W RGB




100W RGB



**All pictures shown are for illustration purpose only*

Coloured led flood lights can be ideal for anyone wishing to add more ambience to their environment. With IP65 rating, its greatly suitable for both indoor and outdoor usage, including birthday party, night time barbeque, garden lighting, stage lighting, landscape lighting.

SPECIFICATION:	50W	100W
COLOUR	RED/GREEN/BLUE/PURPLE/RGB REMOTE	RGB REMOTE
SIZE	199MM*145MM*33MM	260MM*189MM*38MM
LUMENS	4000LM	8000LM
INPUT VOLTAGE	AC175-265V 50-60Hz	AC175-265V 50-60Hz
BEAM ANGLE	115°	115°
RA	>70	>70
POWER FACTOR	0.9	0.9
IP RATING	IP65	IP65
LIFE TIME	30000HR	30000HR
OPERATING TEMP	-40°C-50°C	-40°C-50°C
PACKING	10/CTN	10/CTN

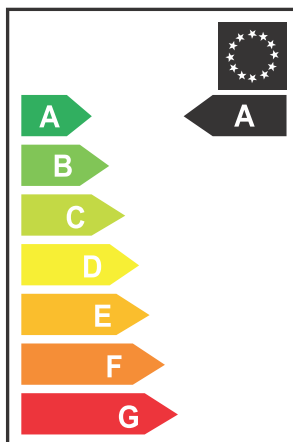

CE ISO 9001



Perkunas



TRITON LED COLOUR FLOODLIGHT



100W




**All pictures shown are for illustration purpose only*

Coloured led floodlights can be ideal for anyone wishing to add more ambience to their environment. With IP66 rating, it's greatly suitable for both indoor and outdoor usage, including birthday party, night time barbeque, garden lighting, stage lighting, landscape lighting.



200W

SPECIFICATION:	100W	200W
COLOUR	RED/GREEN/BLUE/PURPLE/YELLOW/RGB	RGB
SIZE	196MM*30MM*280MM	245MM*30MM*350MM
LUMENS	8000LM	16000LM
INPUT VOLTAGE	AC85-320V 50-60HZ	AC85-320V 50-60HZ
BEAM ANGLE	90°	90°
RA	≥80	≥80
POWER FACTOR	0.95	0.95
IP RATING	IP66	IP66
LIFE TIME	30000HR	30000HR
OPERATING TEMP	-25°C-45°C	-25°C-45°C
PACKING	10/CTN	5/CTN

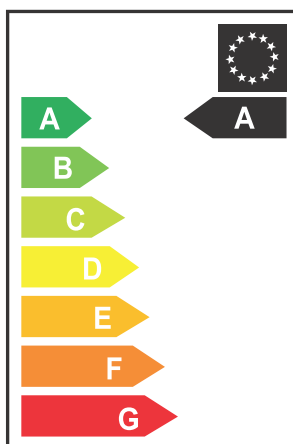

CE ISO 9001





6500K



4000K



3000K



RED



PINK



GREEN



BLUE



RGB

Perkūnas

LED STRIP LIGHT (5050)



**All pictures shown are for illustration purpose only*


PRODUCT DESCRIPTIONS |

Our latest invention to the strip lights family is this 5M IP-65 Bright RGB. These newly developed High density multi format chop could produce over bright light. These LED Strips produce continuous light and illuminate instantly, ultra slim, and flexible and suit all applications, including under cupboard, plinths, recesses, shelves, wardrobe, cornice, shadow gaps, door frames, banisters, handrails, steps, and patios.

SPECIFICATION:		
COLOUR	6500K/4000K/3000K/RED/PINK/GREEN/BLUE	RGB
LENGTH	5 METER	5 METER
LUMENS	7000LM	7000LM
INPUT VOLTAGE	12V	12V
POWER CONSUMPTION	14W PER METER	14W PER METER
LED QUANTITY	5050/60 PER METER	5050/60 PER METER
DIMMABLE	NO	YES
IP RATING	IP20	IP20
LIFE TIME	25000HR	25000HR
PACKING	1 COIL/PKT	1 COIL/PKT



8MM/480D 24V INDOOR COB STRIP LIGHT



6500K



4000K




3000K



RED



GREEN




BLUE



**All pictures shown are for illustration purpose only*


COB stands for Chip on Board, meaning the LED diodes are built directly into the Printed circuit board. The main advantage of this technology is that there is no visible spotting, even when used in more shallow LED profiles and spaces, this ensures the finished installation will present a seamless uninterrupted finish. COB technology also generates less heat, which in turn makes it more efficient, makes the tape last longer and maintain a high-level performance over a longer period of time. This makes our COB Continuous LED Tape perfect for high-end professional and commercial installations. The high build quality and components will assure long lasting performance and reliability.

SPECIFICATION:						
COLOUR	6500K	4000K	3000K	RED	GREEN	BLUE
LENGTH	5 METER	5 METER	5 METER	5 METER	5 METER	5 METER
LUMENS	100LM	95LM	90LM	80LM	80LM	80LM
INPUT VOLTAGE	24V	24V	24V	24V	24V	24V
POWER CONSUMPTION	12W PER METER	12W PER METER	12W PER METER	12W PER METER	12W PER METER	12W PER METER
WATTAGE	60W	60W	60W	60W	60W	60W
IP RATING	IP20	IP20	IP20	IP20	IP20	IP20
PACKING	1 COIL/PKT 10 PKT/BOX	1 COIL/PKT 10 PKT/BOX	1 COIL/PKT 10 PKT/BOX	1 COIL/PKT 10 PKT/BOX	1 COIL/PKT 10 PKT/BOX	1 COIL/PKT 10 PKT/BOX

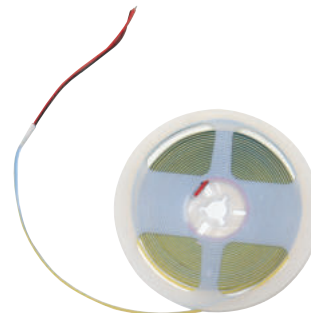



12V 3A
ADAPTOR



4PIN RGB
(MALE TO MALE)
CONNECTOR



4PIN RGB
(MALE & FEMALE)
PLUG & SOCKET



MALE DC
CONNECTOR



2PIN (SINGLE COLOUR)
4 PIN (RGB)
10MM LED STRIP
SOLDERLESS CONNECTOR
CABLE

Perkunas

LED STRIP LIGHT (5050) ACCESSORIES

4PIN RGB (MALE TO MALE) CONNECTOR

Connect led strip to remote controller

Procedure: From Strip to strip or from strip to controller

Material: Pins are copper plated

Application: RGB 5050 SMD LED Strip Light, perfect for connecting LED power supply with strips.

Material: Pins are copper plated

4PIN RGB (MALE & FEMALE) PLUG & SOCKET

No Need Soldering Quick Connector

Width: 4Pin 10MM

Connector: Male and Female

Wire Length: 15cm

Application: 5050/3528 LED Stripe to the RGB LED controller easily

MALE DC CONNECTOR (WHITE)

Product length: 15cm

DC plug: 5.5mm * 2.1mm

Shell material: PVC

Cable material: copper

Operating voltage: DC 12V or 24V

Suitable for: LED strip lights

SOLDERLESS 10MM LED STRIP CONNECTOR CABLE

Variation: 2pin (Single Colour) / 4pin (RGB)

Size: 160mm (Wire) * 14mm

Material: Flame Retardant Nylon + Copper Wire

Conductor Type: Solid

Application: 5050 LED strip lights

Perkunas


LED UFO HIGHBAY



**All pictures shown are for illustration purpose only*

UFO LED high bay lights are LED lights which are shaped like UFOs and can illuminate large areas. Mainly used for commercial or industrial lighting, such as warehouses, factories, garage, shopping malls, etc.

SPECIFICATION:	100W	150W	200W
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
SIZE	300MM*160MM	350MM*150MM	400MM*160MM
BODY MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM
LIFESPAN	30000HR	30000HR	30000HR
INPUT VOLTAGE	175-265V / 50-60Hz	175-265V / 50-60Hz	175-265V / 50-60Hz
LUMINOUS FLUX	10000LM	15000LM	20000LM
BEAM ANGLE	90°	90°	90°
AMBIENT TEMPERATURE	-25°C-40°C	-25°C-40°C	-25°C-40°C
POWER FACTOR	0.6	0.6	0.6
CRI	≥80	≥80	≥80
SURGE PROTECTION	3KV	3KV	3KV
EFFICIENCY	95%	95%	95%
INSTALL WAY	CHAIN	CHAIN	CHAIN
IP RATE	IP44	IP44	IP44
INSULATION GRADE	CLASS 1	CLASS 1	CLASS 1
PACKING	6/CTN	6/CTN	6/CTN

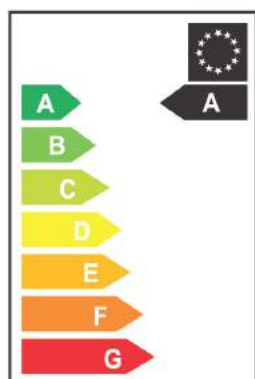

10kv Surge Protective Device
30cm Safety Rope



Perkunas

TITAN LED UFO HIGHBAY




**All pictures shown are for illustration purpose only*

With the development of high bay light technology, UFO LED high bay lights have become the best choice for many large-scale industrial or commercial lighting such as high-end retail, manufacturing, sterile environments, offices, warehouses, sports complexes, storage facilities, commercial spaces, and a variety of other outdoor and indoor lighting applications.

Perkunas TITAN features a black die-cast aluminium housing. Dark powder coat corrosion resistant finish provides long hours salt fog rating. Corrosion resistant external hardware standard.

SPECIFICATION:	100W	150W	200W	240W	300W
COLOUR	6500K/5700K /4000K/3000K	6500K/5700K /4000K/3000K	6500K/5700K /4000K/3000K	6500K/5700K /4000K/3000K	6500K/5700K /4000K/3000K
SIZE	253MM*149MM	308MM*155MM	353MM*160	404MM*168	404MM*168
LUMENS	17000LM	25500LM	34000LM	40800LM	51000LM
INPUT VOLTAGE	220-240V	220-240V	220-240V	220-240V	220-240V
BEAM ANGLE	120°	120°	120°	120°	120°
CRI	≥80	≥80	≥80	≥80	≥80
POWER FACTOR	>0.9	>0.9	>0.9	>0.9	>0.9
IP RATING	IP65	IP65	IP65	IP65	IP65
LIFE TIME	30000HR	30000HR	30000HR	30000HR	30000HR
OPERATING TEMP	-40°C-55°C	-40°C-55°C	-40°C-55°C	-40°C-55°C	-40°C-55°C
PACKING	1/CTN	1/CTN	1/CTN	1/CTN	1/CTN



**6kv Surge Protective Device
30cm Safety Rope**



Perkunas

LED STREET LANTERN



**All pictures shown are for illustration purpose only*


LED street lights as outdoor lighting, are used for various purposes. Some cities deploy them along streets and sidewalks to increase visibility, while others chose to use them as flood lighting in alleyways or parking lots for safety.

SPECIFICATION:	50W	100W	150W	200W
COLOUR	5000K/4000K/3000K	5000K/4000K/3000K	5000K/4000K/3000K	5000K/4000K/3000K
SIZE	560MM*203MM*79MM	560MM*203MM*79MM	670MM*215MM*80MM	725MM*240MM*80MM
LUMENS	5000LM	10000LM	15000LM	20000LM
INPUT VOLTAGE	AC100-240V 50-60Hz	AC100-240V 50-60Hz	AC100-240V 50-60Hz	AC100-240V 50-60Hz
BEAM ANGLE	140X70°	140X70°	140X70°	140X70°
CRI	>80	>80	>80	>80
POWER FACTOR	0.9	0.9	0.9	0.9
IP RATING	IP65	IP65	IP65	IP65
LIFE TIME	50000HR	50000HR	50000HR	50000HR
OPERATING TEMP	-25°C-40°C	-25°C-40°C	-25°C-40°C	-25°C-40°C
PACKING	10/CTN	10/CTN	6/CTN	5/CTN

Diluluskan Oleh / Approved by:



Lamp
Φ60 Lamp

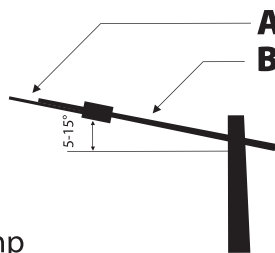



200W



300W



400W



600W



800W



1000W




**All pictures shown are for illustration purpose only*

There are many areas such as roadway, parking lot, park and playground, hospital parking, outdoor security lighting and residential lighting where these solar-powered street lights are used.

SPECIFICATION:	200W	300W	400W
COLOUR	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
SIZE	469MM*219MM	628MM*238MM	827MM*238MM
LUMENS	1800LM	2650LM	3500LM
BATTERY	DC 3.2V 6A (6000MAH)	DC 3.2V 18A (15000MAH)	DC 3.2V 24A (24000MAH)
SOLAR	6V 8W	6V 12W	6V 18W
IP RATING	IP65	IP65	IP65
BODY MATERIAL	PC	PC	PC
PACKING	5/CTN	5/CTN	5/CTN

SPECIFICATION:	600W	800W	1000W
COLOUR	6500K	6500K	6500K
SIZE	450MM*350MM	600MM*350MM	680MM*350MM
BATTERY	DC3.2V 18A (12000MAH)	DC3.2V 24A (18000MAH)	DC3.2V 36A (24000MAH)
SOLAR	6V 16W	6V 25W	6V 30W
IP RATING	IP65	IP65	IP65
BODY MATERIAL	ABS	ABS	ABS
PACKING	5/CTN	5/CTN	5/CTN



CE ISO 9001



Perkunas

LED SOLAR STREET LANTERN



100W



200W



300W



400W



**All pictures shown are for illustration purpose only*

There are many areas such as roadway, parking lot, park and playground, hospital parking, outdoor security lighting and residential lighting where these solar-powered street lights are used.

POWER	100W	200W	300W	400W
SIZE	385*142 (SOLAR PANEL: 190*350)	495*210 (SOLAR PANEL: 240*350)	495*210 (SOLAR PANEL: 450*350)	495*210 (SOLAR PANEL: 530*350)
CCT	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K
LUMINOUS FLUX	1194LM	1697LM	2988LM	3490LM
PANEL	5V /15W	5V /20W	5V/25W	5V/35W
BATTERY CAPACITY (MaH)	10000	15000	25000	30000
IP	65	65	65	65
LED CHIPS	110PCS/2835	240PCS/2835	400PCS/2835	470PCS/2835
VOLTAGE	3.3V/2A	3.3V /3A	3.3V /5.4A	3.3V / 6.5A
DISCHARGE TIME	12HOURS+	12HOURS+	12HOURS+	12HOURS+
LIGHT EMITTING ANGLE	120°	120°	120°	120°
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM
WARRANTY	1YEAR	1YEAR	1YEAR	1YEAR
PACKING	1/CTN	1/CTN	1/CTN	1/CTN

Perkunas

LED SOLAR FLOODLIGHT



**All pictures shown are for illustration purpose only*

LED Solar Floodlights can be used practically everywhere, with a wide range of applications from outdoor to indoor use. For outdoor spaces, floodlights can be used for illuminating: driveways, patios, backyards and pool areas, landscapes and gardens, business signage units. For indoor areas, floodlights can be used for: staircases, garage, emergency exits, hallways and narrow entrances.

POWER	100W	200W	300W	400W	500W	1000W
SIZE	215*165 (SOLAR PANEL 350*235)	250*183 (SOLAR PANEL 350*290)	310*230 (SOLAR PANEL 450*350)	385*258 (SOLAR PANEL 600*350)	220*200 (SOLAR PANEL 350*350)	245*220 (SOLAR PANEL 450*350)
CCT	3000K/4000K/6500K				6500K	6500K
LUMINOUS FLUX	1194LM	1897LM	2988LM	3490LM	-	-
PANEL	5V/15W	5V/20W	5V/25W	5V/35W	6V/15W	6V/20W
BATTERY CAPACITY (MaH)	10000	15000	25000	35000	12000	12000
IP	65	65	65	65	65	65
LED CHIPS	168PCS (2835)	240PCS (2835)	520PCS (2835)	816PCS (2835)	1393PCS (2835)	1617PCS (2835)
VOLTAGE	3.3V/2A	3.3V/3A	3.3V/5.4A	3.3V/6.5A	3.2V/2A	3.2V/3A
DISCHARGE TIME	12 HOURS+	12 HOURS+	12 HOURS+	12 HOURS+	12HOURS+	12HOURS+
LIGHT EMITTING ANGLE	120°	120°	120°	120°	120°	120°
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ABS	ABS
WARRANTY	1YEAR	1YEAR	1YEAR	1YEAR	1 YEAR	1 YEAR
PACKING	10SETS/CTN	10SETS/CTN	5SETS/CTN	5SETS/CTN	5SETS/CTN	5SETS/CTN



100W



200W



300W



400W



500W



1000W





METAL HALIDE BULB AND TUBE



150W MH BULB



250W MH BULB



400W MH BULB



250W MH TUBE



400W MH TUBE




1000W MH TUBE



**All pictures shown are for illustration purpose only*

Metal halide lamp are used for wide area overhead lighting of commercial, industrial, and public spaces, such as parking lots, sports arenas, factories, and retail stores, as well as residential security lighting and automotive headlamps. They also require a warm-up period of several minutes to reach full light output, so they are not typically used for residential room lighting, which is turned off and on frequently.

SPECIFICATION:	150W MH BULB	250W MH BULB	400W MH BULB	250W MH TUBE	400W MH TUBE	1000W MH TUBE
LUMENS	11400LM	19000LM	32000LM	21000LM	36000LM	110000LM
SIZE	140*60	230*90	230*90	250*45	270*45	365*70
CURRENT	1.80A	2.15A	3.25A	2.15A	3.25A	8.25A
FINISH	CLEAR	CLEAR	CLEAR	CLEAR	CLEAR	CLEAR
BASE	E27	E40	E40	E40	E40	E40
CCT	6000K	6000K	6000K	6000K	6000K	4500K
LIFE	12000HRS	12000HRS	12000HRS	8000HRS	8000HRS	6000HRS
PACKING	25/CTN	20/CTN	20/CTN	40/CTN	12/CTN	12/CTN

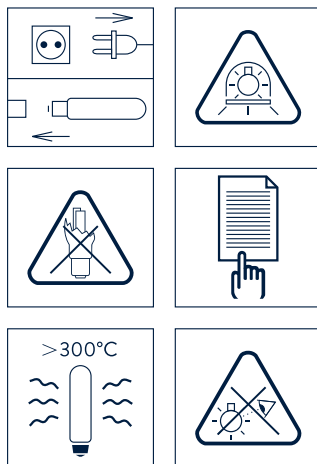



Perkūnas

250W MERCURY BULB



**All pictures shown are for illustration purpose only*

Mercury bulb primarily used in industrial applications such as factories and warehouse.

SPECIFICATION :	
BASE	E40
COLOUR TEMPERATURE	3900K
LIFETIME	20000HR
PACKING	20/CTN

Perkūnas

SON-I BULB AND SON-T TUBE



70W SON-I



70W SON-T



150W SON-T



250W SON-T



400W SON-T



**All pictures shown are for illustration purpose only*


These lamps are mostly used for street lighting as well as industrial uses. They have been widely used for outdoor area lighting, such as on roadways, parking lots, and security areas.

SPECIFICATION:	70W SON-I	70W SON-T	150W SON-T	250W SON-T	400W SON-T
LUMENS	5900LM	6000LM	16000LM	28000LM	48000LM
SIZE	155*70	155*40	155*40	240*45	260*45
CURRENT	0.98A	0.98A	1.8A	3.0A	4.6A
FINISH	COATED	CLEAR	CLEAR	CLEAR	CLEAR
BASE	E27	E27	E40	E40	E40
CCT	2000K	2000K	2000K	2000K	4500K
LIFE	-	10000HR	14000HR	14000HR	6000HR
PACKING	24/CTN	25/CTN	12/CTN	12/CTN	12/CTN

SON-I




SON-T





1000W HALOGEN FITTING C/W TUBE (GLASS)

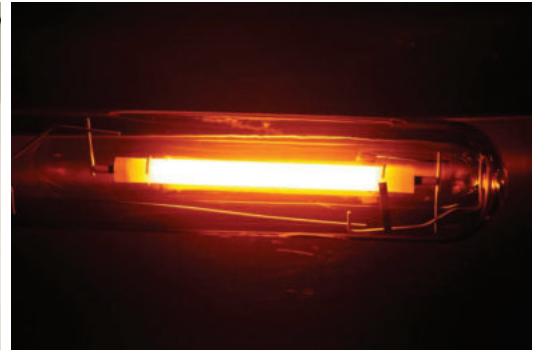

**All pictures shown are for illustration purpose only*

Halogen lamp has natural warm light colour similar as sunlight, suitable for photograph, studio, video record & etc. It also use for heating or warming purpose example farm, painting studio, plant agriculture.

SPECIFICATION:	1000W
COLOUR	2200K
SIZE	255MM*107MM*157MM
INPUT VOLTAGE	110-240V/50-60Hz
IP RATING	IP44
PACKING	12/CTN

Perkunas

JTT E40 HALOGEN TUBE



500W



1000W



**All pictures shown are for illustration purpose only*

Halogen tube use for heating or warming purpose such as food industry, farm and plant agriculture.

SPECIFICATION:	500W	1000W
FITTING	E40	E40
VOLTAGE	220 - 240V	220 - 240V
CCT	2200K	2200K
PACKING	40 / CTN	40 / CTN



Perkūnas

C7 E12 7W CHILI BULB



**All pictures shown are for illustration purpose only*

Smart appearance, durable lifespan. 360 degree beam angle for more efficient lighting. Suitable for Buddhist altar lamp.

SPECIFICATION:		C7 E12 7W CHILI BULB
SIZE		22MM*54MM
COLOUR		CLEAR/RED
INPUT VOLTAGE		AC220-240V
SHAPE		CHILI
HOLDER BASE		E12
TECHNOLOGY		INCANDESCENT FILAMENT
BEAM ANGLE		360°
MATERIAL		GLASS
DIMMABLE		NON-DIMMABLE
NET WEIGHT (KG)		0.005
PACKING		50/CTN



Perkūnas

C32 3W E14 FLICKER BULB



**All pictures shown are for illustration purpose only*

Artificial vivid moving flame, but flameless. It gives a soft orange pulse to create a candle blowing in the wind. Safe and energy saving with low heat generation. Innovative lighting, novel gifts for kids or friends, big surprise at birthday party as cosplay lights. Suitable for bedroom, living room, bar, hotel, night clubs, outdoor gardens, villas, wedding decorations, parties and etc.

SPECIFICATION :

SIZE	100MM*35MM
VOLTAGE	AC220V - 240V
HOLDER BASE	E14
MATERIAL	GLASS
PACKING	200/CTN

Perkunas

T28 15W PYGMY BULB (COPPER FITTING)



E14
(FREEZER)



E27



B22



**All pictures shown are for illustration purpose only*

Pygmy light bulbs are small, pear-shaped bulbs usually used in decorative light strings, festoon lighting, and sign lamps, but can also be found in some appliances in the home.

SPECIFICATION	E14 (FREEZER)	E27	B22
LUMEN	85LM	85LM	85LM
INPUT VOLTAGE	240V-50/60Hz	240V-50/60Hz	240V-50/60Hz
SIZE	LENGTH: 66MM Φ 28MM	LENGTH: 66MM Φ 28MM	LENGTH: 66MM Φ 28MM
CRI	100	100	100
LIFETIME	1,000HRS	1,000HRS	1,000HRS
Hg	0mg	0mg	0mg
PACKING	50/BOX, 1000/CTN	50/BOX, 1000/CTN	50/BOX, 1000/CTN

Perkunas

18W FLUORESCENT TUBE



**All pictures shown are for illustration purpose only*

18W fluorescent tube is great for general lighting purposes especially machinery and equipment.

SPECIFICATION:	18W FL20SD.B
SIZE	580MM
VOLTAGE	AC100-240V
CCT	6500K
LIFESPAN	5,000HR
PACKING	30/CTN


Perkunas



INSECT KILLER TUBE AND FITTING



20W(580MM) BL TUBE
30W BL TUBE

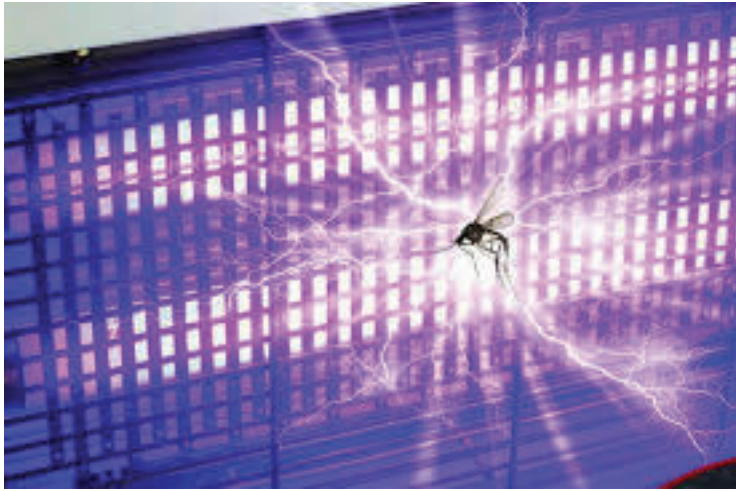

**All pictures shown are for illustration purpose only*

Keep your space free from mosquitos, insects and other unwanted pests using our insect killer tube and fitting. These unit comes with high-quality ultraviolet tube, that at first attract insects and flies and eventually kill them with its high voltage current that runs through the electrified metal grids placed behind the tubes of the fitting.

SPECIFICATION:	20W BL TUBE	30W BL TUBE
WAVE LENGTH (NM)	365	365
BASE	G13	G13
SIZE	580MM	893MM
PACKING	100/CTN	25/CTN

SPECIFICATION:	2X10W	2X15W	2X20W
MATERIAL	ABS	ABS	ABS
VOLTAGE	220V-240V 50Hz	220V-240V 50Hz	220V-240V 50Hz
SIZE	44.1X9.6X28CM	54.4X9.6X28CM	69.9X9.6X28CM
LIFE TIME	6000HRS	6000HRS	6000HRS
PACKING	6/CTN	6/CTN	6/CTN

SPECIFICATION:	5W TOWER
SIZE	17X17X34CM
LIGHT SOURCE	SMD2835 3.2V/60MA
VOLTAGE	220-240V
VOLTAGE OF GRID	1500V
THE EFFECTIVE RANGE	70 SQUARE METERS
PACKING	4/CTN



2X10W INSECT
KILLER FITTING



2X15W INSECT
KILLER FITTING



2X20W INSECT
KILLER FITTING



5W TOWER LED INSECT
KILLER FITTING