A modern interior space featuring a white ceiling with a track lighting system. The ceiling is illuminated by several long, thin, linear light fixtures. In the foreground, there are large, abstract geometric shapes in blue and black. On the right side, a large blue circular graphic element frames a view into another room. In this room, a track lighting fixture is visible on the ceiling, and a framed artwork of a woman's face is displayed on the wall.



MAGNETIC TRACK LIGHT PLATINUM SERIES

MAGNETIC TRACK LIGHT PLATINUM SERIES




**MAGNETIC
TRACK LIGHT**

EB20-220

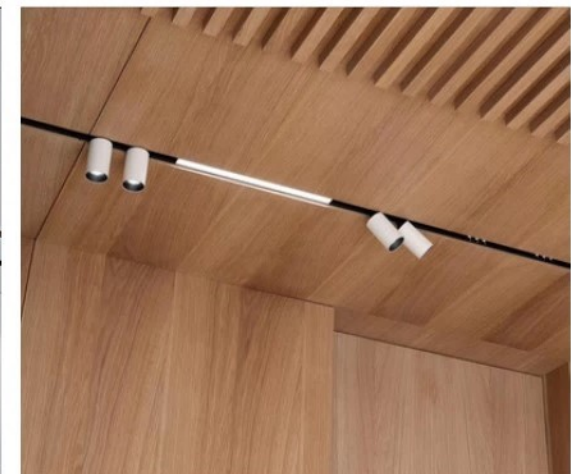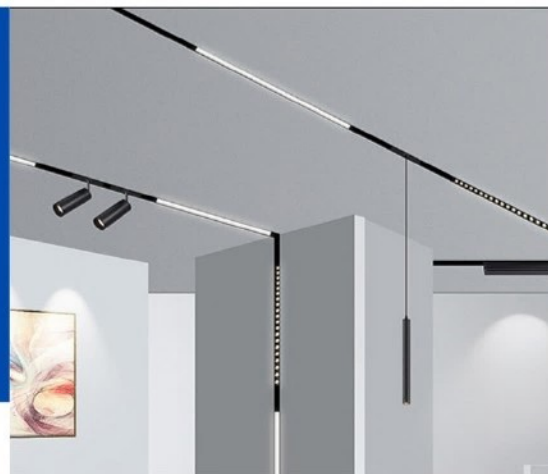


TYPE	LED MAGNETIC LIGHT
COLOR	BLACK
WATT	12W
VOLTAGE	48V
MATERIAL	ALUMINIUM
LED CHIP	COB (ORSAM)
CCT	3000K/4000K/6500K
INSTALLATION	MAGNETIC TRACK RAIL
POWER FACTOR	0.55
LUMEN	1080LM
CRI	95
BEAM ANGLE	120°
INPUT PARAMETER	AC180-260V
AMBIENT	-30°C ~ +45°C
LIFESPAN (HRS)	≥25000

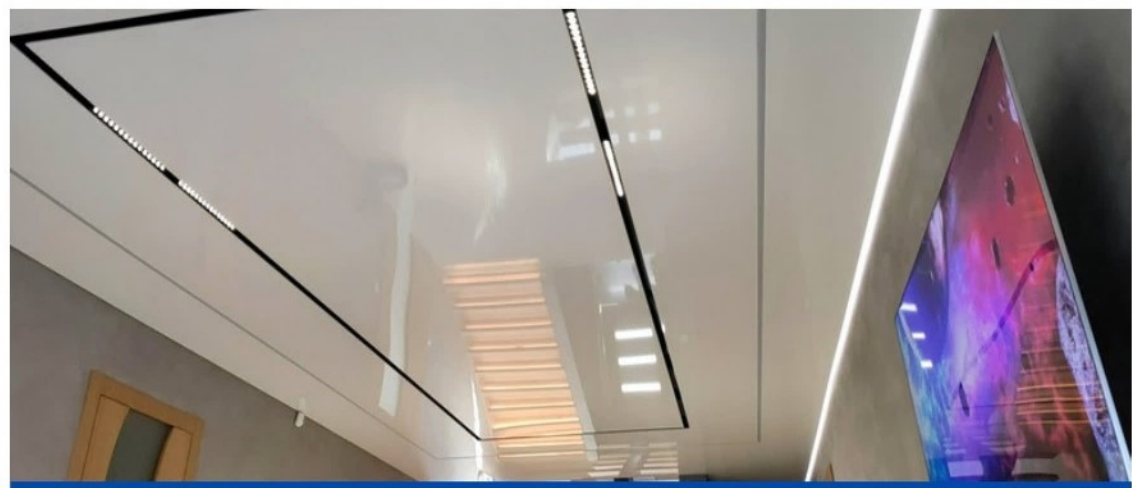

MEASUREMENT (mm)

220L x 22W x 43.1H

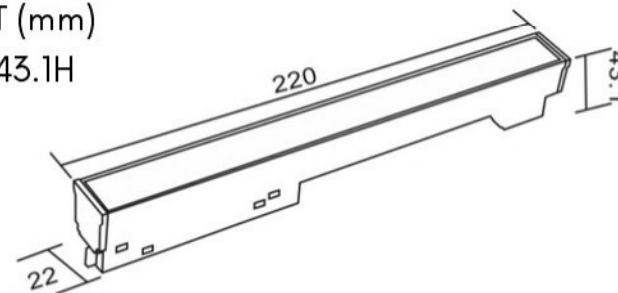


MAGNETIC TRACK LIGHT PLATINUM SERIES




**MAGNETIC
TRACK LIGHT**

EB20-350

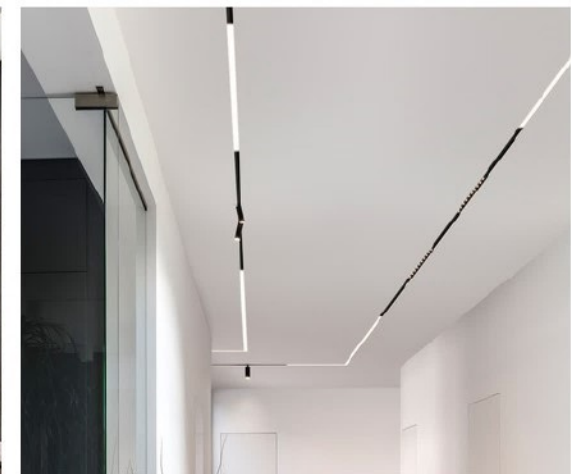

MEASUREMENT (mm)

328L x 22W x 43.1H

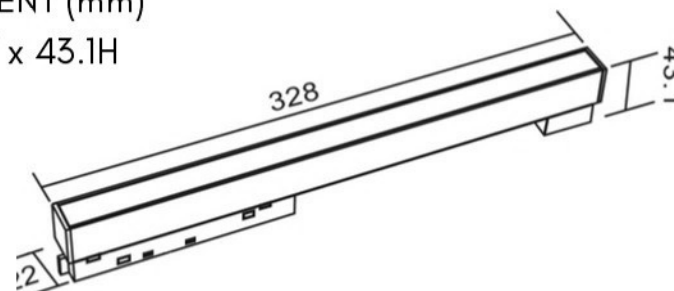


TYPE	LED MAGNETIC LIGHT
COLOR	BLACK
WATT	20W
VOLTAGE	48V
MATERIAL	ALUMINIUM
LED CHIP	COB (OSRAM)
CCT	3000K/4000K/6500K
INSTALLATION	MAGNETIC TRACK RAIL
POWER FACTOR	0.55
LUMEN	1620LM
CRI	95
BEAM ANGLE	24°
INPUT PARAMETER	AC180-260V
AMBIENT	-30°C ~ +45°C
LIFESPAN (HRS)	≥25000

MAGNETIC TRACK LIGHT PLATINUM SERIES




**MAGNETIC
TRACK LIGHT**

EB20-550

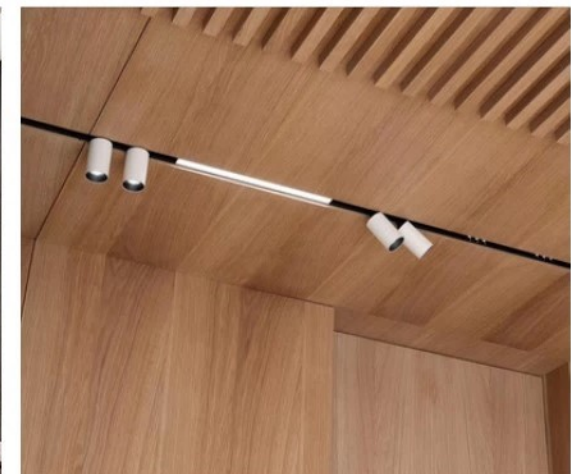


TYPE	LED MAGNETIC LIGHT
COLOR	BLACK
WATT	30W
VOLTAGE	48V
MATERIAL	ALUMINIUM
LED CHIP	COB (OSRAM)
CCT	3000K/4000K/6500K
INSTALLATION	MAGNETIC TRACK RAIL
POWER FACTOR	0.55
LUMEN	2700LM
CRI	95
BEAM ANGLE	120°
INPUT PARAMETER	AC180-260V
AMBIENT	-30°C ~ +45°C
LIFESPAN (HRS)	≥25000

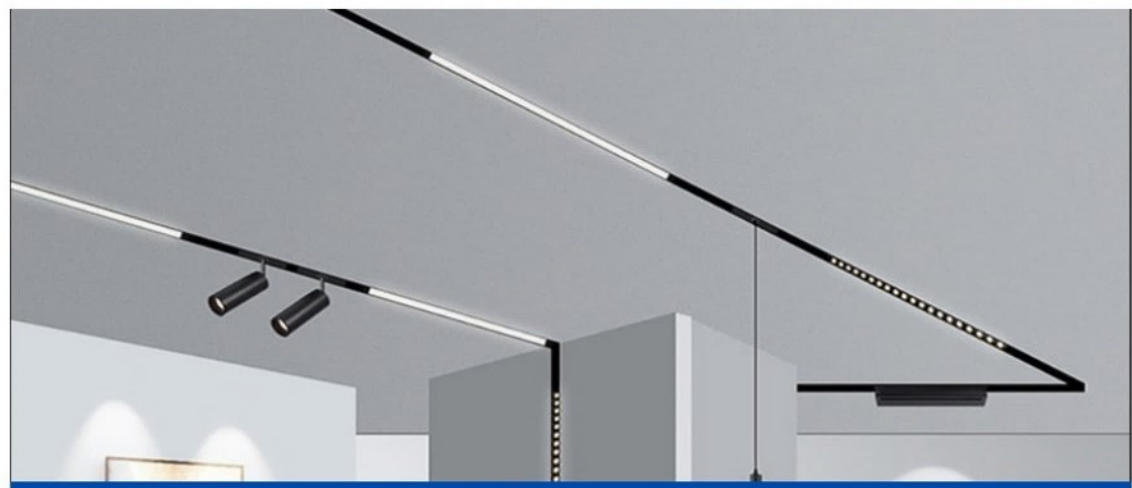

MEASUREMENT (mm)

543L x 22W x 43.1H

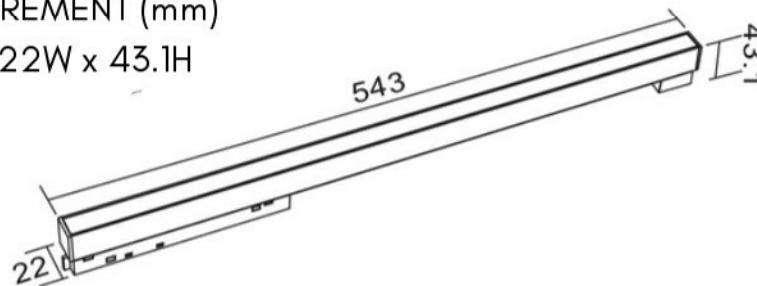

MAGNETIC TRACK LIGHT PLATINUM SERIES




MAGNETIC
TRACK LIGHT


EBS20-110



TYPE	LED MAGNETIC LIGHT
COLOR	BLACK
WATT	6W
VOLTAGE	48V
MATERIAL	ALUMINIUM
LED CHIP	COB (OSRAM)
CCT	3000K/4000K/6500K
INSTALLATION	MAGNETIC TRACK RAIL
POWER FACTOR	0.55
LUMEN	640LM
CRI	95
BEAM ANGLE	24°
INPUT PARAMETER	AC180-260V
AMBIENT	-30°C ~ +45°C
LIFESPAN (HRS)	≥25000

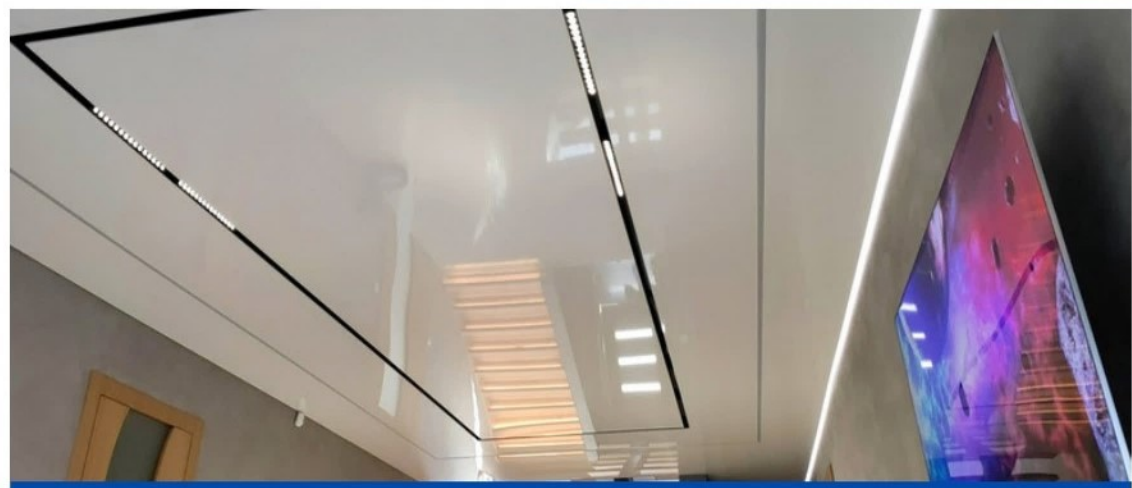

MEASUREMENT (mm)
112L x 22W x 43.1H

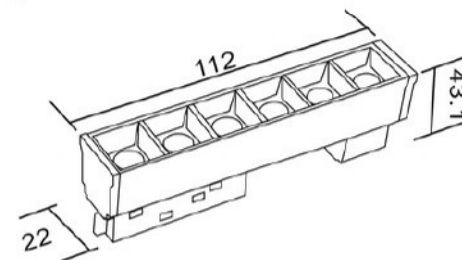


MAGNETIC TRACK LIGHT PLATINUM SERIES




MAGNETIC
TRACK LIGHT


EBS20-220

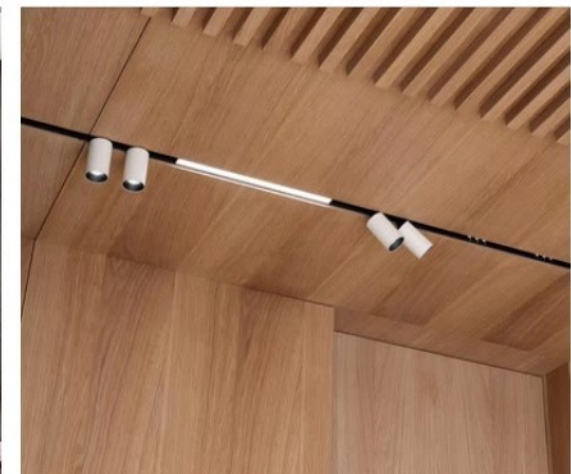

TYPE	LED MAGNETIC LIGHT
COLOR	BLACK
WATT	12W
VOLTAGE	48V
MATERIAL	ALUMINIUM
LED CHIP	COB (OSRAM)
CCT	3000K/4000K/6500K
INSTALLATION	MAGNETIC TRACK RAIL
POWER FACTOR	0.55
LUMEN	1080LM
CRI	95
BEAM ANGLE	24°
INPUT PARAMETER	AC180-260V
AMBIENT	-30°C ~ +45°C
LIFESPAN (HRS)	≥25000

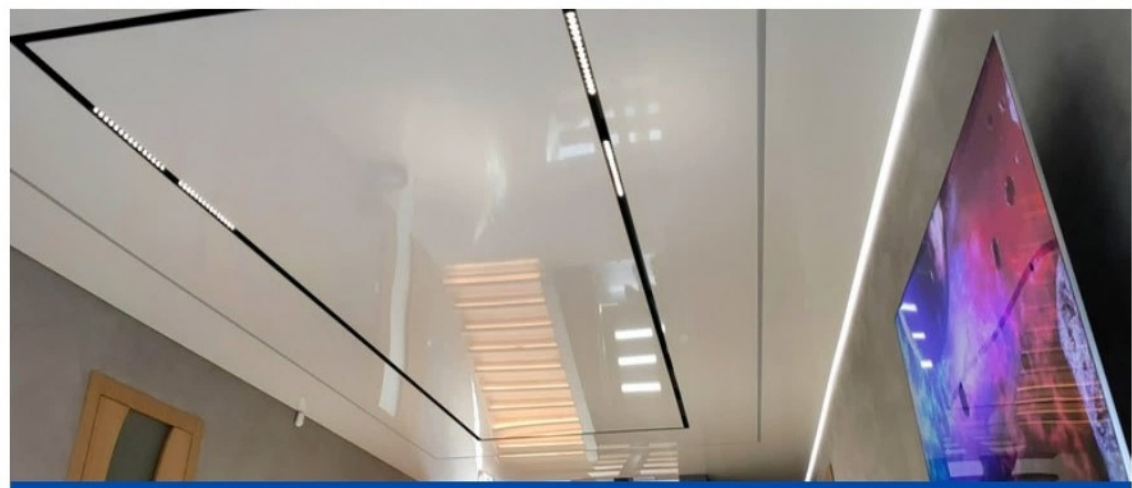

MEASUREMENT (mm)
328L x 22W x 43.1H

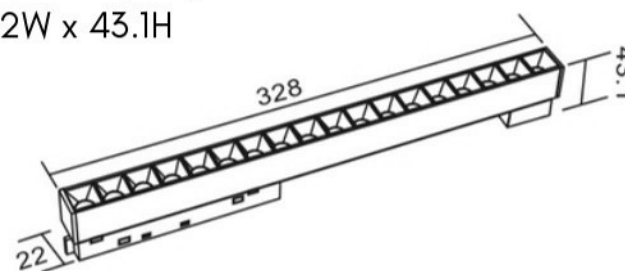


MAGNETIC TRACK LIGHT PLATINUM SERIES




MAGNETIC
TRACK LIGHT


EBS20-350

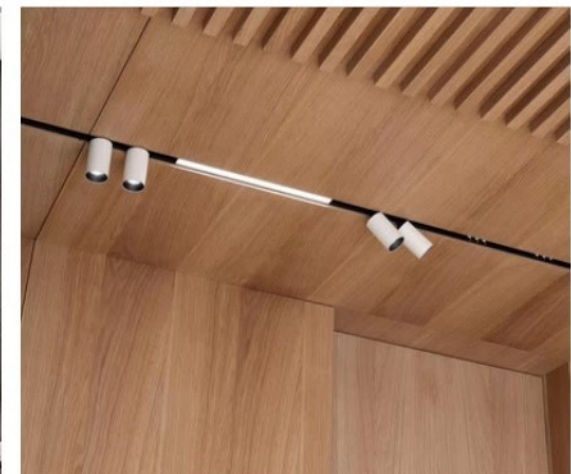


TYPE	LED MAGNETIC LIGHT
COLOR	BLACK
WATT	20W
VOLTAGE	48V
MATERIAL	ALUMINIUM
LED CHIP	COB (OSRAM)
CCT	3000K/4000K/6500K
INSTALLATION	MAGNETIC TRACK RAIL
POWER FACTOR	0.55
LUMEN	1620LM
CRI	95
BEAM ANGLE	24°
INPUT PARAMETER	AC180-260V
AMBIENT	-30°C ~ +45°C
LIFESPAN (HRS)	≥25000

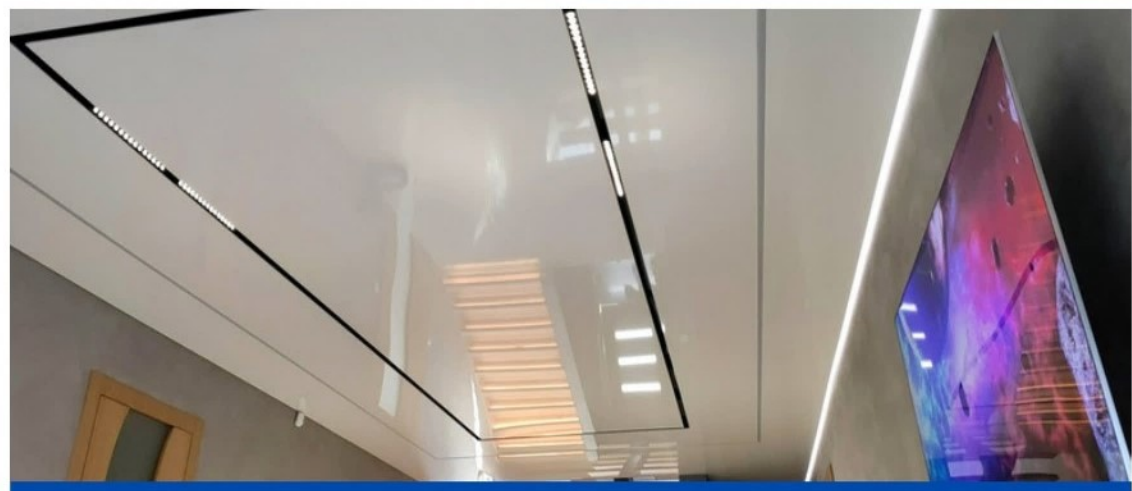

MEA:
543L

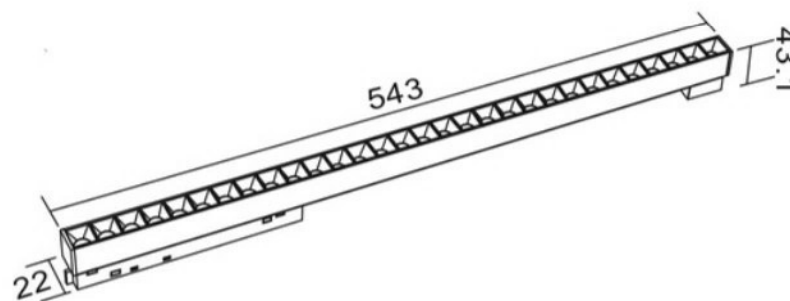

MAGNETIC TRACK LIGHT PLATINUM SERIES



MAGNETIC TRACK LIGHT

EB501-10W
EB501-20W

TYPE	LED MAGNETIC LIGHT
COLOR	BLACK
WATT	10W/20W
VOLTAGE	48V
MATERIAL	ALUMINIUM
LED CHIP	COB (OSRAM)
CCT	3000K/4000K
INSTALLATION	MAGNETIC TRACK RAIL
POWER FACTOR	0.55
LUMEN	900LM/1080LM
CRI	CRI
BEAM ANGLE	24°
INPUT PARAMETER	AC180-260V
AMBIENT	-30°C~+45°C
LIFESPAN (HRS)	≥25000
SIZE	<ul style="list-style-type: none">• 10W 50Φ X 100L X 153H• 20W 60Φ X 115L X 140H




MAGNETIC TRACK LIGHT PLATINUM SERIES



MAGNETIC TRACK LIGHT

EB502-10W

TYPE	LED MAGNETIC LIGHT
COLOR	BLACK
WATT	10W
VOLTAGE	48V
MATERIAL	ALUMINIUM
LED CHIP	COB (OSRAM)
CCT	3000K/4000K
INSTALLATION	MAGNETIC TRACK RAIL
POWER FACTOR	0.55
LUMEN	900LM
CRI	95
BEAM ANGLE	24°
INPUT PARAMETER	AC180-260V
AMBIENT	-30°C~+45°C
LIFESPAN (HRS)	≥25000
SIZE	50W*1050H

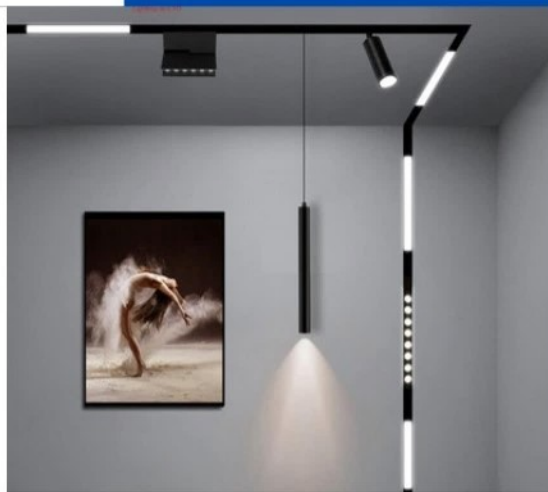

MAGNETIC TRACK LIGHT PLATINUM SERIES



**MAGNETIC
LINEAR LIGHT**

EB201-6W



**MAGNETIC
LINEAR LIGHT**

EB201-12W

TYPE	LED MAGNETIC LIGHT
COLOR	BLACK
WATT	6W/12W
VOLTAGE	48V
MATERIAL	ALUMINIUM
LED CHIP	COB (OSRAM)
CCT	3000K/4000K
INSTALLATION	MAGNETIC TRACK RAIL
POWER FACTOR	0.55
LUMEN	1080LM
CRI	95
BEAM ANGLE	24°
INPUT PARAMETER	AC180-260V
AMBIENT	-30°C ~ +45°C
LIFESPAN (HRS)	≥25000
SIZE	<ul style="list-style-type: none">• 6W - 112L X 23W X 144H• 12W - 220L X 23W X 144H

