

TUNGSRAM™

New BrightFit LED Tube



New BrightFit LED T8 Start Glass tubular lamps provides an attractive, entry-level alternative to standard Fluorescent T8 lamps. The innovative design delivers impressive light distribution and high efficiency, while at the same time ensuring rapid payback. Available in 2ft and 4ft with 3 different color temperatures.

BrightFit... SUITABLE FOR ALL TYPE OF LED T8 CASING!



Application areas



Hospitality



Industrial



Car park



Office

Product Code	Product Description	Wattage (W)	CCT (K)	Lumen (lm)	Efficacy (lm/W)	Pack Qty (PCS)
New BrightFit LED T8 Start Glass						
93118599	LED T8 SG 0.6m 10W 830 220-240V 1/25 TU DS	10	3000	1000	100	1/25
93118600	LED T8 SG 0.6m 10W 840 220-240V 1/25 TU DS	10	4000	1000	100	1/25
93118601	LED T8 SG 0.6m 10W 865 220-240V 1/25 TU DS	10	6500	1000	100	1/25
93118602	LED T8 SG 1.2m 20W 830 220-240V 1/25 TU DS	20	3000	2000	100	1/25
93118603	LED T8 SG 1.2m 20W 840 220-240V 1/25 TU DS	20	4000	2000	100	1/25
93118604	LED T8 SG 1.2m 20W 865 220-240V 1/25 TU DS	20	6500	2000	100	1/25

Feature & Benefits

- Input 220-240V 50/60Hz
- CRI ≥ 80
- Life Time 15,000 Hours L70
- Wide 180° light distribution
- Switching cycles 15 000
- Starting time < 0.5 sec
- Power factor > 0.5
- Ambient temperature range -20° C to +45°C.
- Color consistency < 6 SDCM
- Visual Comfort – RG0 & Flicker Free



** PATENT PENDING TECHNOLOGY


This product come with unique design to suit for all type of LED T8 casing.

EFFICACY Value: 100 /m/W 

This product has been tested up to 6,000 hours

It allows the tube to be fitted well with either single-sided or double-sided casing

Dimension (mm)

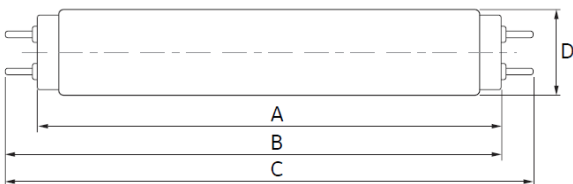

Maximum overall length (mm)	2ft	4ft
A	600	1200
B	597	1207
C	604	1214
D	28	28
Net weight (g)	85	170

