

CMK2

CMA2

SCM

SCG

SCA₂

SCS2

CKV2

CAV2/ COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/ **MSDG**

FC*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FΚ

Spd Contr

Ending



Substantial series for specific use

Coolant resistant G2/G3 Series

NBR(G2) and FKM(G3) packings are available for various cutting oils.



T1/T1L (with switch) Series


FKM packing and fluorine grease are suitable for use under high temperature environments

Rechargeable battery manufacturing process P4 Series

Available for restriction of copper related materials, dust countermeasures and longer lifespan with ultra dry air during the rechargeable battery manufacturing process.



All substances that can adversely affect the environment, including lead and hexavalent chrome, have been eliminated

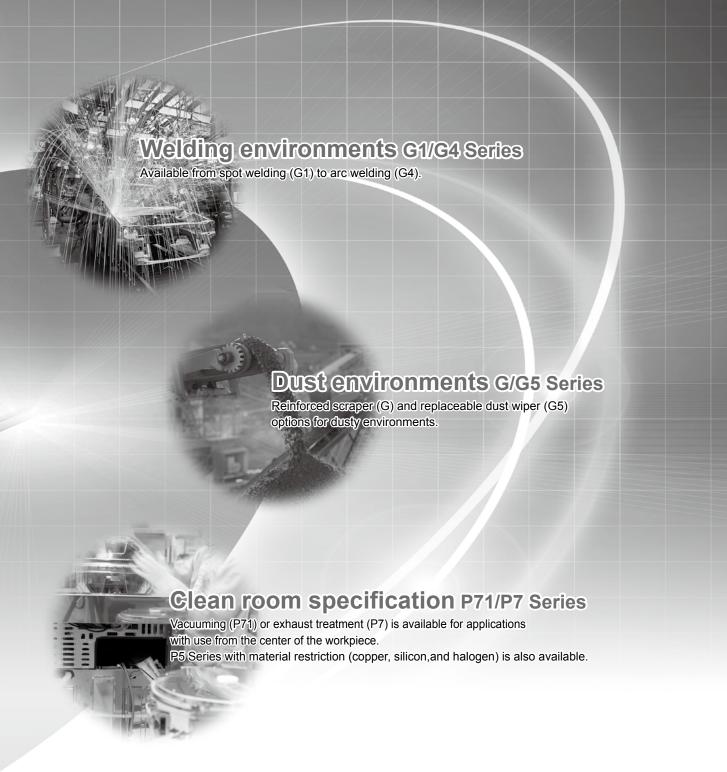

Other variations

Rubber-air cushioned c

Reduce the impact noise and force at stroke end. Suitable for impact reduction

in operation and noise reduction in facilities.

Noise reduction

Fine speed F

The special sliding structure greatly reduces adherence and stick-slip of packing, and makes it possible to operate at ultra low speed of 1 mm/s. It is ideal to prevent cylinders from popping out, to push fragile workpieces slowly and to control pushing pressure.



SCP*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/ COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/ MSDG

FC*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd Contr

Ending