

# WELUX LED Mini Fixed Trimless

## Winzig Anti-Glare Series


Housing and Trim: Aluminium, white or black  
 Mounting type: Recess, adjustable 20 degree  
 Heat Management: Aluminium heat sink  
 Reflector: Black, optional for silver, white & gold  
 Diffuser: Acrylic lens

LED Modules  
 SMD - 300lm - 2,200lm  
 Long service life time : 50,000 hours (L80)  
 THD <20%

Drivers: 700mA  
 (optional: Dimmable available)  
 Power factor at full load : > 0.9

Standards  
 EN 620301: LED modules for general lighting - Safety specification  
 EN 62471: Photobiological safety of lamps and systems  
 EN 55015: Radio disturbance emissions  
 EN 61000-3-2 Limited for harmonic emissions  
 EN 61547: Immunity requirements

Warranty: 3 years

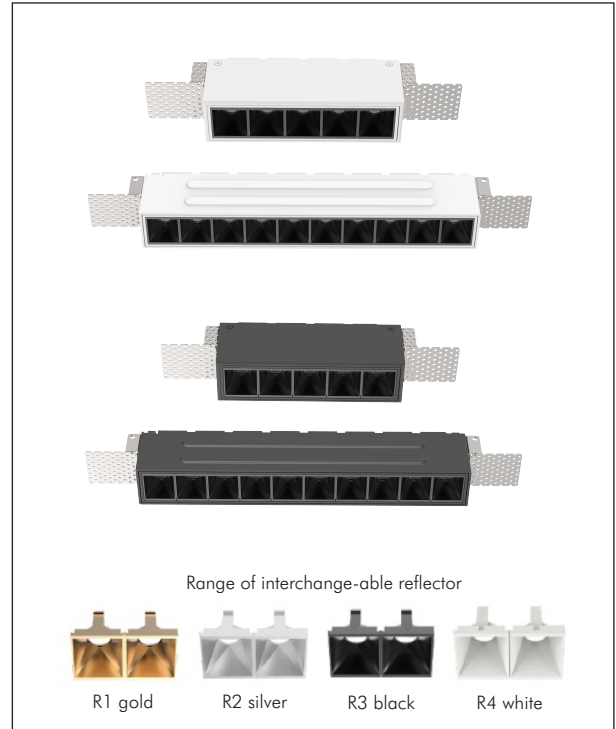

Application: Office, Commercial Building, Lobby, Conventional Hall, Ballroom, Concourse

Model	Source, System Wattage	Voltage	Frequency	Power Factor	Colour	Colour Temperature	LED Output (Lm)	System Output (Lm)	Typ. Beam Angle	Typ. CRI Ra	Energy Efficiency	Dimension (L x W x H) mm	Dimension (Cut out) mm
Fixed, body available in white or black, trimless													
WFT5-11W	11.0W 13.0W	220-240	50/60Hz	0.9	Warm white	3000K	1050	800	24, 40	>90	A+	150 x 41 x 62.5	152 x 44
		220-240	50/60Hz	0.9	Neutral white	4000K	1100	850	24, 40	>90	A+		
WFT10-22W	22.0W 24.0W	220-240	50/60Hz	0.9	Warm white	3000K	2100	1600	24, 40	>90	A+	282.5 x 41 x 62.5	290 x 44
		220-240	50/60Hz	0.9	Neutral white	4000K	2200	1700	24, 40	>90	A+		

\*Colour tolerance: 3 MacAdam    \*\*Production tolerance of luminous flux and efficiency: ±10%    \*\*\*Min. CRI ±3%    \*\*\*\*Power consumption: ±10%  
 The values contained in this data sheet can change due to technical innovations without notifications, therefore kindly refer to us when during order.