



# FIBER ADAPTER

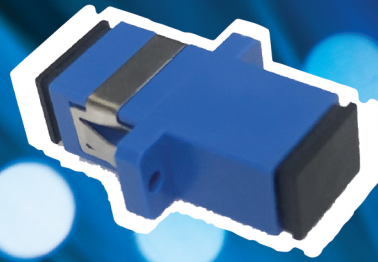

SC ADAPTER

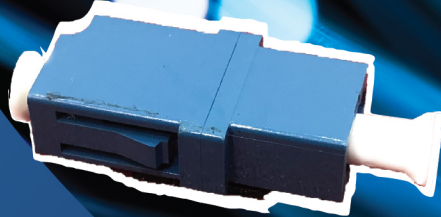

LC ADAPTER



FC ADAPTER

DESCRIPTION	CLM5-XX-SC-X	CLM5-XX-LC-X	CLM5-XX-FC-X
	SC ADAPTER	LC ADAPTER	FC ADAPTER
SINGLEMODE	CLM5-SM-SC-S	CLM5-SM-LC-S	CLM5-SM-FC-S
	CLM5-SM-SC-D	CLM5-SM-LC-D	CLM5-SM-FC-D
MULTIMODE	CLM5-MM-SC-S	CLM5-MM-LC-S	CLM5-MM-FC-S
	CLM5-MM-SC-D	CLM5-MM-LC-D	CLM5-MM-FC-D
INSERT LOSS	< 0.2 dB	< 0.2 dB	< 0.2 dB
RETURN LOSS	< 55 dB	< 55 dB	< 55 dB
EXCHANGE ABILITY	< 0.2 dB	< 0.2 dB	< 0.2 dB
REPEAT ABILITY	< 0.2 dB	< 0.2 dB	< 0.2 dB
OPERATIONAL TEMPERATURE	- 40 °C ~ + 70 °C	- 40 °C ~ + 70 °C	- 40 °C ~ + 70 °C
STORAGE TEMPERATURE	- 40 °C ~ + 70 °C	- 40 °C ~ + 70 °C	- 40 °C ~ + 70 °C

S = SIMPLEX, D= DUPLEX.

