

# ULTRA 4

## Technical Specifications:

Ultra 4 offers the sophistication and advanced features of the rest of the Ultra range in a compact, cost-effective package and useful new features that make it even easier to set up and finetune. Offering 4 alarm or control relays and a multifunctional display while losing none of the easy setup and configuration that has made the Ultra range the natural choice for non-contacting measurement worldwide.



### PHYSICAL: MOUNTING OPTION SPECIFIC

Mounting Option:	Standard Wall Mount:	Fascia Mount:
<b>Controller Body Dimensions:</b>	150 mm x 130 mm x 63.5 mm (5.9 in x 5.1 in x 2.5 in)	160 mm x 180 mm x 63 mm (6.3 in x 7.07 in x 2.5 in)
<b>Weight:</b>	Nominal 700 g (1.54 lb)	Nominal 700 g (1.54 lb)
<b>Enclosure Material/Description:</b>	Polycarbonate, flame resistant to UL94-V0	Polycarbonate, flame resistant to UL94-V0
<b>Cable Entry Detail:</b>	3 x M20 glands	
<b>Transducer Cable Extensions:</b>	3-core Screened	
<b>Maximum Separation:</b>	1,000 m (3,280 ft), 500 m (1,640 ft) for dBR16 & dBR8	

### ENVIRONMENTAL

<b>IP Rating:</b>	IP67/NEMA 4X (Standard), IP64 (Fascia)
<b>Max. &amp; Min. Temperature (Electronics):</b>	-20 °C to +45 °C (-4 °F to +113 °F)
<b>Flammable Atmosphere Approval:</b>	Safe area compatible with approved approved sensors/transducers. See sensor/transducer spec sheet
<b>UV Rating:</b>	UL746C F1
<b>CE Approval:</b>	See EU Declaration of Conformity
<b>UL Approval:</b>	UL Listed. UL Listed to Canadian Safety Standards. Certificate Number E257330

### PERFORMANCE

<b>Accuracy:</b>	±0.25% of the measured range or 6 mm (0.24 in), whichever is greater ±2 mm (0.01 in) for dBR16 mmWAVE RADAR
<b>Resolution:</b>	±0.1% of the measured range or 2 mm (0.08 in), whichever is greater
<b>Max Range:</b>	Dependent on application and transducer (maximum 40 m (131 ft) dB40)
<b>Min Range:</b>	Dependent on application and transducer (minimum zero dBMACH 3)
<b>Rate Response:</b>	Fully Adjustable

### PROGRAMMING

<b>On-board Programming:</b>	By integral keypad
<b>PC Programming:</b>	Via Integral RJ11 port on unit, or via SD Card slot
<b>Programming Security:</b>	Via passcode (user selectable and adjustable)
<b>Programmed Storage:</b>	Via non-volatile memory
<b>Data Logging &amp; Removable Storage:</b>	Via Micro SD card slot or internal 10-day totaliser logs (flow only)
<b>SD Card Memory (Included):</b>	8 GB

## ECHO PROCESSING

**Description:** DATEM (Digital Adaptive Tracking of Echo Movement)

**Technologies:** Ultrasonic and FMCW RADAR

## OUTPUTS

**Analog Output:** Isolated (floating output (to 150 V) of 4-20mA or 0-20mA into 1 k $\Omega$  (user programmable and adjustable)

**Digital Output:** Half Duplex RS232

**Volt-free Contacts, Number, & Rating:** 3 x SPCO isolated relays, rated at 5A at 250 V AC and 1 Solid state SPNO isolated relay, rated 30 V at 100 mA, suitable for pulse counter applications

**Display:** Monochrome graphical dot-matrix, 160 x 240 pixels. Fully programmable display options with integral keypad with menu navigation keys. Program/run/test mode indicators

## SUPPLY

**Power Supply:** 100-240 V AC 50/60 Hz. DC 10-28 V

**Power Consumption:** AC = 20 VA MAX, DC = 10 W max

**Fuses, Mains:** 1A 'T' 20 mm (0.79 in) ceramic 1500A breaking

**Fuses, Transducer:** 100 mA barrier type, 4000A breaking


## COMMUNICATIONS (OPTIONAL)

**Modbus RTU/ASCII:** Isolated RS485

**Profibus DPV1:** Isolated RS485

**HART 7:** Isolated 4-20mA

**DNP3/WITS:** Gateway interface (pending)

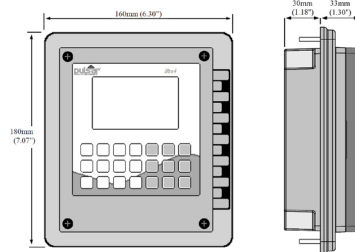

Ultra 4 fascia mount drawing front and side



INFO@PULSARMEASUREMENT.COM

*Pulsar Measurement is a trading name of Pulsar Process Measurement, Ltd.*

*Copyright © 2020 Pulsar Measurement  
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX  
Registered No.: 3345604 England & Wales*

## Delivering the Measure of Possibility

### United States

11451 Belcher Road South  
Largo, FL 33773

+1 888-473-9546

### Canada

16456 Sixsmith Drive  
Long Sault, Ont. K0C 1P0

+1 855-300-9151

### United Kingdom

Cardinal Building, Enigma  
Commercial Centre  
Sandy's Road, Malvern WR14 1JJ

+44 (0) 1684 891371

Rev 2.0