




Novoplan 21



**Fast hardening
self-levelling
smoothing compound
for thicknesses from
1 to 5 mm**

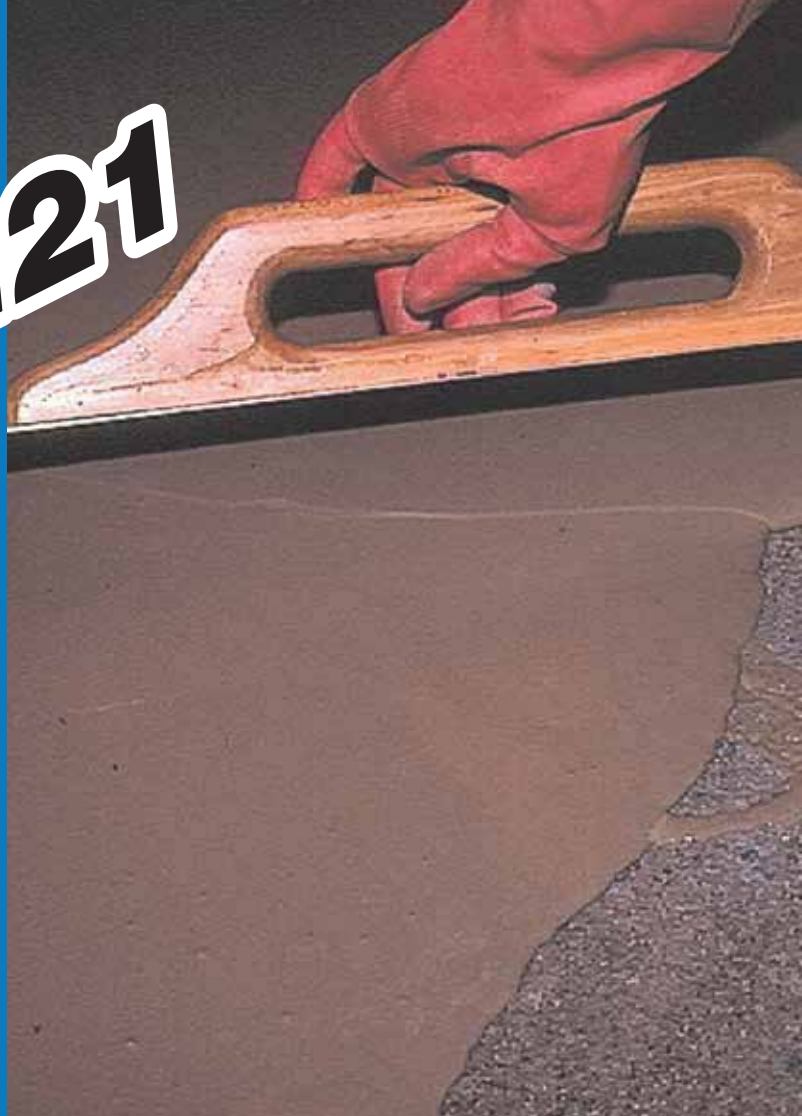

CLASSIFICATION ACCORDING TO EN 13813

The smoothing compounds made with **Novoplan 21** in compliance with the norms referred to in this very technical data sheet are classified as CT-C20-F7-A2_{fl} according to EN 13813.

WHERE TO USE

Novoplan 21 is used for levelling and smoothing new or existing substrates and provides an underlayment for receiving PVC, linoleum, rubber, cork, textile and non-woven flooring in areas where a good resistance to loads and traffic in offices and public areas is required.

Novoplan 21 must only be used in interior conditions in thicknesses from 1 to 5 mm.

Some application examples

- Smoothing of concrete slabs and cement-based screeds or **Topcem**, **Topcem Pronto**, **Mapecem** or **Mapecem Pronto** screeds.
- Smoothing of anhydrite screeds.
- Smoothing of under-floor heating installations.
- Smoothing over existing ceramic tile, terrazzo, natural stone and magnesite floors.

TECHNICAL CHARACTERISTICS

Novoplan 21 is a grey powder comprising of special fast-setting and hydrating cements, specially graded silica sand, special resins and additives prepared and developed in the MAPEI research laboratories.

When mixed with water, **Novoplan 21** becomes a very fluid, easily workable mix with excellent self-levelling properties and cures rapidly.

Novoplan 21 can also be applied with an appropriate pump.

Novoplan 21 is strong enough to withstand wheelchair traffic.

Novoplan 21 can be applied in thicknesses up to 5 mm per single coat without significant shrinkage that might cause cracks or crazing.

Once completely dry **Novoplan 21** has good compressive and flexural strength as well as resistance to impact and abrasion.

Flooring can be installed once **Novoplan 21** has dried, after 24-48 hours, depending on the thickness, temperature and moisture of the environment.

Novoplan 21



Applying the Novoplan 21 paste on the substrate



Applying Novoplan 21 with a metal trowel on a cementitious screed primed with Primer G



Using a spiked roller over a fresh coat of Novoplan 21

RECOMMENDATIONS

- Do not add more water to the mix once it has begun to set.
- Do not add lime, cement or gypsum to the mix.
- Do not use for smoothing in exteriors or for substrates subject to rising damp.
- Do not apply another coat of **Novoplan 21**, once the previous one has dried completely, without first applying diluted **Primer G** (1 part by weight of **Primer G** diluted with 1 part water).
- Do not use **Novoplan 21** at temperatures below +5°C or above +35°C.
- Not suitable for installing wood and parquet floor and wall coverings.
- Do not apply **Novoplan 21** in thicknesses less than 1 mm.
- Do not use for levelling over wooden substrates.

APPLICATION PROCEDURE

Preparing the substrate

The substrates must be dry, solid, free from dust, loose materials, paints, wax, oils, rust and traces of gypsum.

Cement based surfaces which are not sufficiently solid must be removed, or wherever possible, consolidated with **Prosfas**, **Primer EP** or **Primer MF**.

Cracks or crazing in substrates must be repaired with **Eporip**.

In order to fix dust and to provide uniform absorbency of the substrate, dusty or very porous concrete surfaces must be treated with a coat of **Primer G** (1 part **Primer G** with 3 parts of water) or with **Livigum** (1 part **Livigum** with 5 parts water).

Anhydrite screeds can be levelled with **Ultraplan** only after the application of a coat of **Primer G** or **Primer EP**.

On existing ceramic or natural stone surfaces apply a coat of **Mapeprim SP** after the surfaces have been cleaned with detergents and mechanically abraded. Level before **Mapeprim SP** has dried completely (it must still be tacky).

Preparing the mix

While mixing with a low speed electric mixer, pour a 25 kg bag of **Novoplan 21** into a bucket containing 6.0-6.25 kg of clean water and mix until a uniform lump-free paste is obtained. Larger quantities of **Novoplan 21** can be prepared in suitable mortar mixers.

Let the mix stand for several minutes before remixing for a short time, the mix is then ready to be applied.

The amount of mixed **Novoplan 21** must be used within 30 minutes (at a temperature of +23°C).

Applying the mix

Apply **Novoplan 21** in a single coat from 1 to 5 mm thick with a large metal trowel or a squeegee, keeping the trowel slightly inclined to obtain the desired thickness.

Novoplan 21 can be also applied with a suitable pump.

When a second coat is required, it is recommended to apply it as soon as the previous coat is set to light foot traffic (approx. 3 hours at +23°C).

Installing the flooring

Once **Novoplan 21** dries, resilient, textile and ceramic flooring can be installed over it.

All of the MAPEI adhesive products are designed to be applied over **Novoplan 21**.

Waiting time before installation can vary according to the humidity and ambient temperature, and the thickness and type of flooring to be installed (from 24 to 48 hours).

Cleaning

While it is still fresh, **Novoplan 21** can be removed from tools with water.

CONSUMPTION

1.6 kg/m² per mm of thickness.

PACKAGING

Novoplan 21 is available in 25 kg bags.

STORAGE

12 months in a dry place and unopened packing.

Novoplan 21 could, over time, have a

TECHNICAL DATA (typical values)EN 13813 - CT - C20 - F7 - A2_{fl}**PRODUCT IDENTITY****Consistency:** fine powder**Colour:** grey**Bulk density (kg/m³):** 1,200**Dry solids content (%):** 100**APPLICATION DATA (at +23°C - 50% R.H.)****Mixing ratio:** approximately 24-25 parts water for 100 parts by weight of **Novoplan 21****Thickness per coat (mm):** from 1 to 5**Self-levelling:** good**Density of mix with water (kg/m³):** 2,000**pH of mix:** approx. 12**Application temperature range:** from +5°C to +30°C**Pot life:** approx. 20-30 minutes**Setting time:** approx. 50-70 minutes**Set to light foot traffic:** 3-4 hours**Waiting time before bonding:** 24 hours**FINAL PERFORMANCES****Compressive strength (EN 196) (N/mm²):**
- after 28 days: 22.0**Flexural strength (EN 196) (N/mm²):**
- after 28 days: 7.0**Resistance to abrasion-weight loss**
(with Taber abrasion meter, H22 disk, weight
550 g after 200 rev.):
- after 28 days curing: 3.5 g

Novoplan21



shortened setting time, however this will not affect its performance in service.

SAFETY INSTRUCTIONS FOR PREPARATION AND APPLICATION

Instructions for the safe use of our products can be found on the latest version of the Safety Data Sheet, available from our website www.mapei.com.

PRODUCT FOR PROFESSIONAL USE.

WARNING

Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical applications: for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application: in every case, the user alone is fully responsible for any consequences deriving from the use of the product.

Please refer to the current version of the Technical Data Sheet, available from our website www.mapei.com.sg

LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in force at the time of the MAPEI product installation.

The most up-to-date TDS can be downloaded from our website www.mapei.com.sg

ANY ALTERATION TO THE WORDING OR REQUIREMENTS CONTAINED OR DERIVED FROM THIS TDS EXCLUDES THE RESPONSIBILITY OF MAPEI.

All relevant references for the product are available upon request and from www.mapei.com.sg



MAPEI Malaysia Sdn. Bhd. (231780-K)

Head Office : Tel +(60) 3 7842 9098 - Fax +(60) 3 7842 6197
Johor Bahru Office : Tel +(60) 7 595 3032 - Fax +(60) 7 595 3098
Penang Office : Tel +(60) 4 642 9098 - Fax +(60) 4 642 9097
Kuching Office : Tel +(60) 82 246 660 - Fax +(60) 82 246 661
Sales Admin : Tel +(60) 3 7842 9989 - Fax +(60) 3 7842 9880
Nilai Plant : Tel +(60) 6 799 8028 - Fax +(60) 6 799 8191
Email: mapei@mapei.com.my **Website:** www.mapei.com.my