




## Standard equipment :

- Controller temperature protection
- Proportional controls
- Battery charge indicator
- Emergency stop button
- Emergency lowering system
- Can Bus Technology
- Charger protection
- Overload limited
- Low voltage alarm
- Safety brackets

Model	GOPZ202	GOPZ302	GOPZ3.502	GOPZ3.503	GOPZ403	GOPZ4.503
Load Capacity(kg)	300	300	300	300	300	300
Platform Height(mm)(H3)	2000	3000	3500	3500	4000	4500
Working Height(mm)(H2)	4000	5000	5500	5500	6000	6500
Overall Height(mm)(H1)	1420	1930	2150	1640	1820	1980
Overall Width(mm)(W1)	700	700	700	700	700	700
Overall Length(mm)(L1)	1530	1530	1530	1530	1530	1530
Maximum slope	1.5-3	1.5-3	1.5-3	1.5-3	1.5-3	1.5-3
Gradeability	30%	30%	30%	30%	30%	30%
Maximum Drive Speeds-Stowed(km/h)	4	4	4	4	4	4
Maximum Drive Speeds-Raised(km/h)	1.1	1.1	1.1	1.1	1.1	1.1
Ground Clearance(mm)	40	40	40	50	50	50
Wheelbase(mm)	1240	1240	1240	1240	1240	1240
Front wheels	6in	6in	6in	6in	6in	6in
Drive wheel	250*80	250*80	250*80	250*80	250*80	250*80
Batteries	2-12V/120Ah	2-12V/120Ah	2-12V/120Ah	2-12V/120Ah	2-12V/120Ah	2-12V/120Ah
Integrated charger	24V/15A	24V/15A	24V/15A	24V/15A	24V/15A	24V/15A
Drive motors	2-24V/0.5KW	2-24V/0.5KW	2-24V/0.5KW	2-24V/0.5KW	2-24V/0.5KW	2-24V/0.5KW
Lifting Motor	24VDC/1.5KW	24VDC/1.5KW	24VDC/1.5KW	24VDC/1.5KW	24VDC/1.5KW	24VDC/1.5KW
Self Weight(kg)	400	574	588	655	665	675
Platform size(mm)	950x640	950x640	950x640	900x640	900x640	900x640
Up/Down speed(sec)	12/14	20/22	24/26	17/19	20/22	23/25

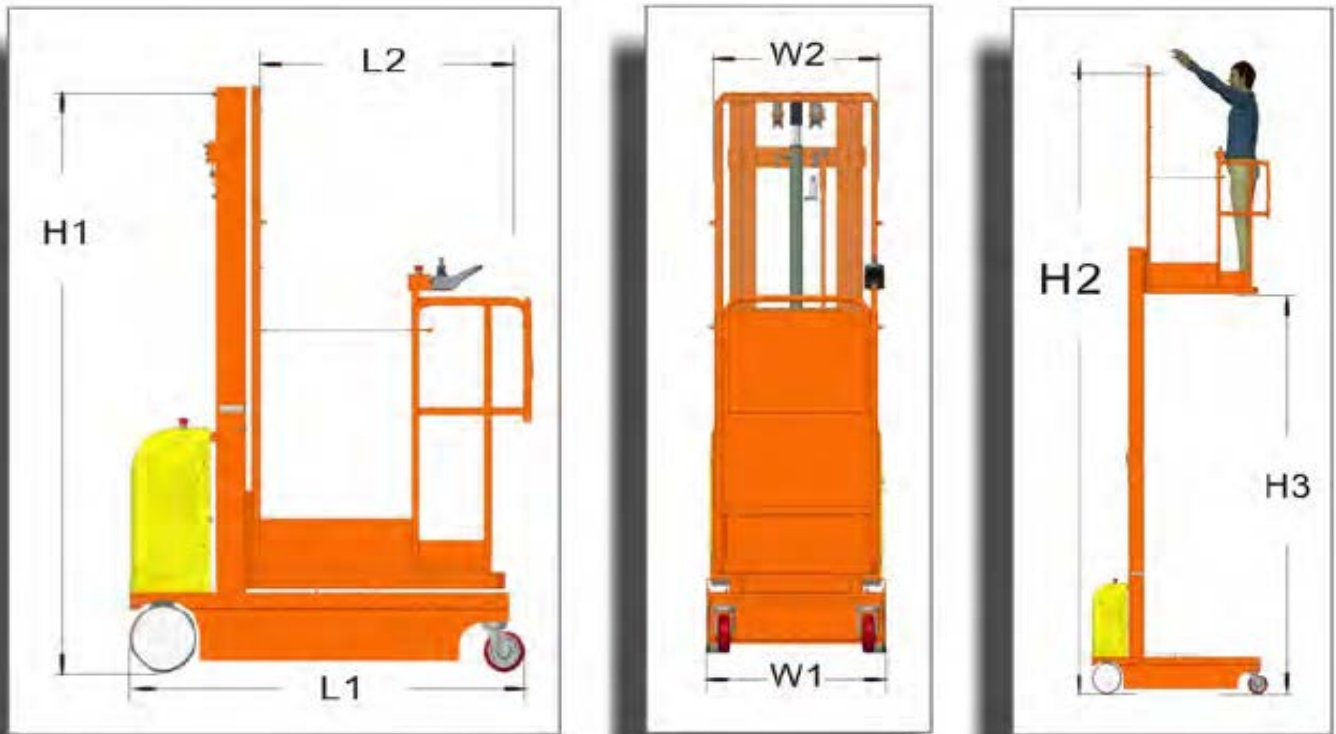

## Characteristic

- The light weight and maneuverability make it convenient to use in supermarket and warehouse.
- Zero-turn radius and compact design (1.53M x 0.70M) provide access in and around confined work areas.
- On-board diagnostic help operators troubleshoot on the fly and make adjustments in the field to maximize uptime.