


Low Profile Hand Pallet Truck

CBY-ACL




Model	CBY-ACL2.0T	CBY-ACL2.0T	CBY-ACL1.0T	CBY-ACL1.0T	CBY-ACL2.0T	CBY-ACL2.5T	CBY-ACL3.0T
Capacity(kg)	2000	2000	1000	1000	2000	2500	3000
Max Fork Height (mm)(H2)	90		165		175		
Min Fork Height (mm)(H1)	35		51		65		
Fork Length (mm)(L1)	1150/1220						
Width Overall Fork (mm)	550/685						
Steering Wheel (mm)	160x50		180x50		160x50		
Fork Wheel (mm)	34x58		50x70		64x70		

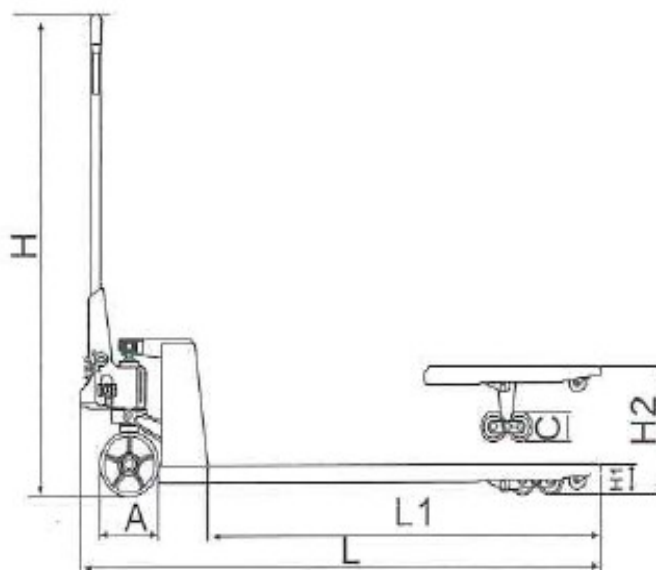




handle A



Lower Position



Neutral Position



Lifting Position

Lower Position—to lower load, pull up on the finger tip control.

Neutral Position—to place finger tip control lever in this position during pulling the truck or load.

Lift Position—to raise load, push down on finger tip control, pump handle to raise the load.



- Option of different coating material for both steering wheel and fork rollers.
- Polyurethane—ideal for delicate floors with hard wearing and non-marking property, quiet and durable.
- Nylon—low drag efforts, high resistance to chemicals, non-marking, preferred in food, fishing and chemical industries with smooth level floors.