





Model	CBY-ACL1.5T	CBY-ACL2.0T	CBY-ACL2.5T	CBY-ACL3.0T
Capacity(kg)	1500	2000	2500	3000
Max Fork Height (mm)(H2)	175			
Min Fork Height (mm)(H1)	52	65		
Fork Length (mm)(L1)	1150/1120			
Width Overall Fork (mm)	550/685			
Steering Wheel (mm)	160x50			
Fork Wheel (mm)	60x70			
Self Weight (kg)	68-85			



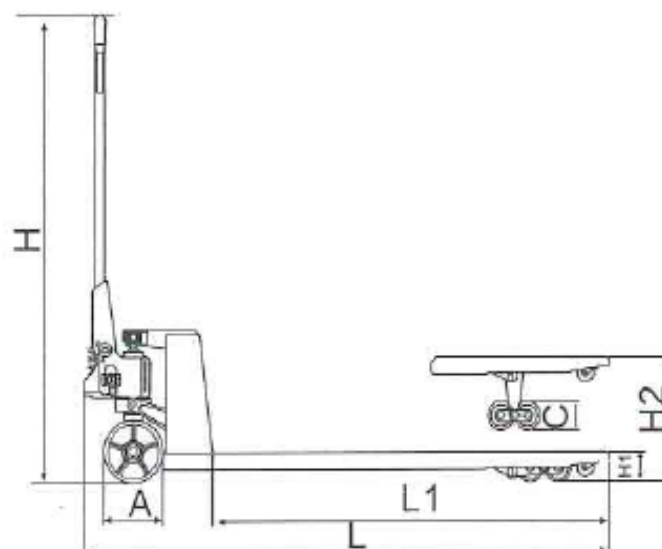


handle A



Lower Position



Neutral Position



Lifting Position

Lower Position—to lower load, pull up on the finger tip control.

Neutral Position—to place finger tip control lever in this position during pulling the truck or load.

Lift Position—to raise load, push down on finger tip control, pump handle to raise the load.



- Option of different coating material for both steering wheel and fork rollers.
- Polyurethane—ideal for delicate floors with hard wearing and non-marking property, quiet and durable.
- Nylon—low drag efforts, high resistance to chemicals, non-marking, preferred in food, fishing and chemical industries with smooth level floors.