

Hand Stacker

CTY-E

- Robust steel profile construction
- Sturdy and compact enough to fit through standard door and to operate in congested areas.
- Lifting function operated by foot and hand controls
- Allow the operator to work without having to perform extreme body movements.



Easy and comfortable handling through ergonomically handles, effortless pulling during transport with long tiller.



Ergonomic rubber handle ensures a comfortable easy operation.




Model	CTY-E1.0	CTY-E1.5	CTY-E2.0
Rated lifting Capacity(kg)	1000	1500	2000
Max lifting height(mm)	1600		
Lowered height of forks(mm)	85		
Fork Length(mm)	900		
Adjustable width of forks(mm)	320-740		
Lifting speed(mm/stroke)	20	18	14
Lowering speed(mm/stroke)	Controllable		
Operation power of hand crank(kg)	24	28	32
Outer width of front legs(mm)	690		
Min refill volume for cylinder(L)	1.5	1.8	2
Front wheel size(mm)	75x52	75x70	
Rear wheel size(mm)	180x50		
Overall size(mm)	2030x780x1450	2040x780x1470	2040x780x1470
Self Weight(kg)	150	220	250

What type of stacker do I need?

Open pallet (without bottom boards)

This pallet suitable for wrapover forks stacker. It has the type of forks wrap over the legs of stacker. Both the forks and legs are inserted under the pallet.

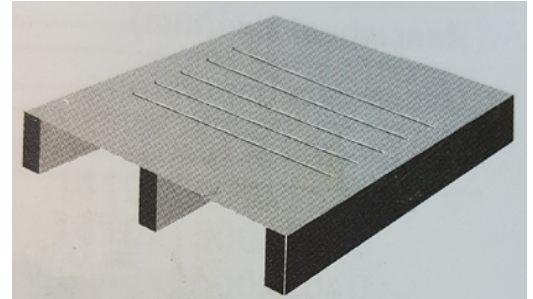

Closed pallet (with bottom boards)

This pallet require stacker with straddle legs that can fit around the pallet. The forks are positioned between the legs (the fork width is usually adjustable). This type of stacker can be used with both open and closed pallets.

