


GPC
Male Straight

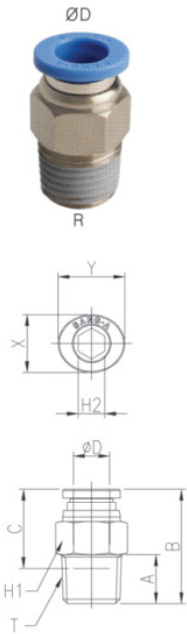

MODEL [ØD-T] Tube (Metric) – Thread (R)

MODEL	ØD	R	A	B	C	H1	H2	X	Y	Orifice (Ømm)	W.G(g)	Qty/Inbox
GPC 03M3	3	M3	3	20.4	14.5	8	1.5	8.6	10.8	1.2	4.5	100
GPC 03M5	3	M5	4	20.1	14.5	8	2	8.6	10.8	2	4.7	100
GPC 03M6	3	M6	5	21.1	14.5	9	2	8.6	10.8	2	6.8	100
GPC 04M3	4	M3	3	20.4	14.5	8	1.5	8.6	10.8	1.2	4.2	100
GPC 04M5	4	M5	4	20.1	14.5	8	2	8.6	10.8	2	4.5	100
GPC 04M6	4	M6	5	21.1	14.5	9	3	8.6	10.8	3	6.3	100
GPC 0401	4	R1/8	8	20.1	14.5	10	3	8.6	10.8	3	8.6	100
GPC 0402	4	R1/4	11	20.1	14.5	14	3	8.6	10.8	3	17.3	100
GPC 0403	4	R3/8	12	21.1	14.5	17	3	8.6	10.8	3	30.0	50
GPC 06M5	6	M5	4	21.8	15.5	11	2	11	13	2	8.3	100
GPC 06M6	6	M6	5	22.8	15.5	11	3	11	13	3	8.0	100
GPC 0601	6	R1/8	8	22	15.5	11	4	11	13	4	9.2	100
GPC 0602	6	R1/4	11	22.8	15.5	14	4	11	13	4	18.2	100
GPC 0603	6	R3/8	12	21.8	15.5	17	4	11	13	4	28.4	50
GPC 0604	6	R1/2	15	25.8	15.5	21	4	11	13	4	54.4	50
GPC 0801	8	R1/8	8	27.7	17.8	13	5	13	15	5	13.7	100
GPC 0802	8	R1/4	11	25.7	17.8	14	6	13	15	6	17.1	100
GPC 0803	8	R3/8	12	23.7	17.8	17	6	13	15	6	27.3	50
GPC 0804	8	R1/2	15	26.7	17.8	21	6	13	15	6	51.8	50
GPC 1001	10	R1/8	8	29.4	19.4	17	5	16	18.5	5	22.2	50
GPC 1002	10	R1/4	11	32.4	19.4	17	6	16	18.5	6	27.6	50
GPC 1003	10	R3/8	12	28.4	19.4	17	8	16	18.5	8	29.3	50
GPC 1004	10	R1/2	15	27.3	19.4	21	8	16	18.5	8	48.5	50
GPC 1201	12	R1/8	8	32.4	22.4	19	5	19.5	22.5	5	28.9	50
GPC 1202	12	R1/4	11	35.4	22.4	19	6	19.5	22.5	6	34.2	50
GPC 1203	12	R3/8	12	31.8	22.4	19	8	19.5	22.5	8	33.5	50
GPC 1204	12	R1/2	15	33.8	22.4	21	8	19.5	22.5	8	54.8	25
GPC 1403	14	R3/8	12	39	24.4	22	8	23	25	8	53.9	25
GPC 1404	14	R1/2	15	36.5	24.4	22	10	23	25	10	58.9	25
GPC 1603	16	R3/8	12	39.7	25	24	8	24	27	8	58.7	25
GPC 1604	16	R1/2	15	42.2	25	24	10	24	27	10	58.2	25

*Hexagonal wrench may be used for a proper tightening.