






## SPECIALTY

### For High Viscosity & Adhesives

- ☆ For use with  $\mu$  pressurized container
- ☆ VR models include a check valve to prevent depressurization after trigger-release; allowing continuous work & stability
- ☆ VR models provide separation of inlet pressure and cup pressure adjustment; allowing best combination of atomization & fluid output flow
- ☆ Ideally suited for tough-to-spray materials including high viscosity, glue, corrosive/water-based adhesives, etc.

MODEL	 (Ømm)	 IN (psi)	 (1/min)	 (mm)	 (kw)
S-770V-01P	1.5				
S-770V-02P	1.7				
S-770V-03P	2.0				
S-770V-04P	2.5				
S-770VR-01P	1.5	35~40	270	300~400	1.5~2.2
S-770VR-02P	1.7				
S-770VR-03P	2.0				
S-770VR-04P	2.5				

▶ Ø3.0/3.5mm NOZZLE ALSO AVAILABLE    AIR INLET: 1/4" PF/NPS (M)    FLUID INLET: 3/8" PF/NPS (M)



S-770V-01P



S-770VR-03P

## PRESSURE POTS & TANKS

### 2 Quarts

- ☆ Lightweight aluminum body with anodization
- ☆ Great versatility & mobility (comes with a hook)
- ☆ PU packing compatible with solvent
- ☆ Wide-mouth opening for easier cleaning (2QT-S)
- ☆ Detachable lock ring, free from tangled hoses (2QT-S)



2QT-B



2QT-S

### 10L or Larger

- ☆ One-piece body construction (Regular/Stainless Steel) and parts
- ☆ "Butterfly" locking nuts for maximum safety and durability
- ☆ Air distribution valve under lid to prevent paint splash
- ☆ Available in 10, 20, 40, 50L (1 Liter = 0.25 Gallon)
- ☆ Optional manual or Air-assisted motor agitator/mixer
- ☆ Optional Aluminum or Stainless Steel interior container for easier maintenance



ST-10L (Non S.S.)  
Economy Version



ST-10M  
10L, Stainless Steel




ST-10ASS  
10L, Stainless Steel  
Air Agitation Style

## AIR FILTRATION SYSTEMS

### S806/L906 Series

- ☆ Filter and regulator in one ( 99% absorption rate)
- ☆ Remove water, oil and contaminants down to 5µm
- ☆ Improve performance and life of air-tools
- ☆ Ideal to work under high-pressure required environment (200~300 psi)
- ☆ Modular design for future upgrades

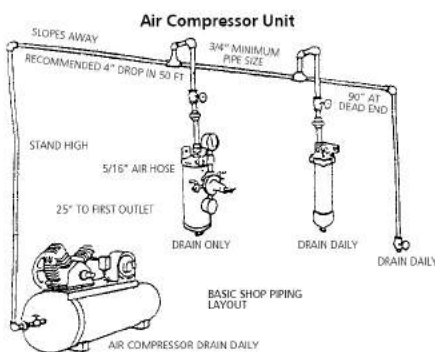

S806

MODEL	FILTER CAPACITY (cfm)	REGULATOR CAPACITY (cfm)
S806	75	50
L906	120	

## SANDER & GRINDER



Random Orbital Palm Sander  
(5mm Orbit) w/5" or 6" Pad

- S-5N / S-6N ( Non-Vacuum )
- S-5C / S-6C ( Central-Vacuum )
- S-5S / S-6S ( Self-Generated Vacuum )



S-HDG4 / S-HDG5 ( inch )  
100° Heavy Duty Grinder



S-200 Straight Die Grinder



S-210 Angle Die Grinder

## SUITCASE COMBO



3-Gun Combo w / Accessories  
(Primer / Basecoat / Clearcoat)



Large-Mini Combo  
w / Accessories

## ACCESSORIES



S-081A  
( for 2QT & Tanks )



S-081B  
( Deluxe Diaphragm Type )



S-031 Tube  
( Undercoating Gun )



S-032  
( Engine Cleaning Gun )



3-PCS  
Cap Set



3M™ PPS™ Cup Adapter  
( Male / Female )  
\*Cup Not Included



S-081C  
( Compact Type )



S-081CD  
( Compact Type w/  
Digital Gauge )



S-031 Cup  
( Undercoating Gun )



S-092  
Viscosity Cup  
( Ford #4 )



S-093  
Gun Holder for  
Gravity Guns



S-091A  
( Gravity Filter )



S-091B  
( Suction Filter )



Repair Kit