


Specifications		
Model	Main unit	CLO-2725 (NN)
	Battery Pack ^{*1}	BSL36A18 BSL36B18
	Battery Charger ^{*1}	UC18YSL3
Battery Pack (Lithium-ion Battery) ^{*1}	Voltage	36 V DC
	Battery Capacity	BSL36A18 BSL36B18 2.5 Ah 4.0 Ah
Battery Charger ^{*1}	Power Source	220 - 240 V AC
	Charging Time	BSL36A18 BSL36B18 32 min 52 min
Hole Capacity	Cutter	Hole diameter Plate Thickness
	One-touch Type JETBROACH 25L	12 to 27 mm dia. 6 to 25 mm
Max. Stroke	40 mm	
No-load Speed	820 min ⁻¹	
Cutter Position Adjustment	Pivot Side to Side	10 mm
	Straight Front to Back	10 mm
Magnet Holding Power	5500 N (561 kgf)	
Magnet Dimensions	65 x 145 mm	
Mass (Weight)	9.0 kg ^{*2}	
Accessories Included		
<ul style="list-style-type: none"> •Feed Handle Ass'y •Pilot Pin 08025 (A1) •Oiler •Tube 4 x 7 •Hex. Socket Screw Key 4 •Hex. Socket Set Screw with Dog Point 8 x 28 •Cutting Oil (0.5 L) •Lashing Strap •Spanner 14 •Spanner 7 x 9 •Guard 		

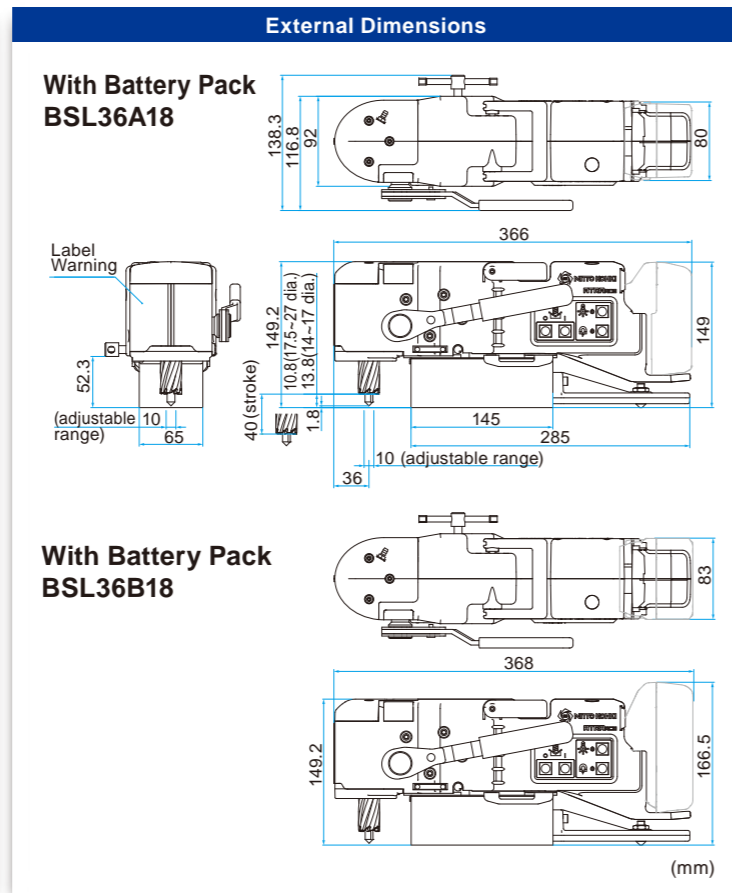

^{*1} Battery Pack and Battery Charger are not included with the product
^{*2} Including Battery Pack and Feed Handle

One-touch Type JETBROACH							
Part No.	Size	Part No.	Size	Part No.	Size	Part No.	Size
TK01148	12 x 25	TK01711	17.5 x 25	TK01718	21 x 25	TK01725	24.5 x 25
TK01149	13 x 25	TK01712	18 x 25	TK01719	21.5 x 25	TK01726	25 x 25
TK01150	14 x 25	TK01713	18.5 x 25	TK01720	22 x 25	TK01727	25.5 x 25
TK01151	15 x 25	TK01714	19 x 25	TK01721	22.5 x 25	TK01728	26 x 25
TK01152	16 x 25	TK01715	19.5 x 25	TK01722	23 x 25	TK01729	26.5 x 25
TK01153	17 x 25	TK01716	20 x 25	TK01723	23.5 x 25	TK01730	27 x 25
		TK01717	20.5 x 25	TK01724	24 x 25		

Pilot Pin 06025S
Part No. TK01710

76 mm

Pilot Pin 08025(A1)
Part No. TK01486

76 mm

Li-ion

Lithium-ion batteries are required to be recycled; never discard a lithium-ion battery in the waste. Please contact your local sales office or community recycling program for information on properly disposing of lithium-ion batteries.

Optional Accessories

Carry Case
Part No. TB10881

Battery Pack(Lithium-ion Battery)
Model : BSL36A18, BSL36B18

Battery Charger
Model : UC18YSL3

- Use the battery (Model: BSL36A18/BSL36B18) and charger (Model: UC18YSL3) manufactured by Koki Holdings Co., Ltd.
- Read the instruction manual of Koki Holdings Co., Ltd., on how to use the battery and charger.
- For further information about the battery and charger, contact Koki Holdings Co., Ltd.

NITTO KOHKI CO., LTD.

Head Office
 9-4, Nakaikegami 2-chome, Ohta-ku, Tokyo 146-8555, Japan
 Tel : +81-3-3755-1111 Fax : +81-3-3753-8791
 E-mail : overseas@nitto-kohki.co.jp



Web www.nitto-kohki.co.jp/e/

DISTRIBUTED BY

CORDLESS MODEL ATRACE Model CLO-2725 (NN)

On-site drilling goes cordless



A powerful battery
of 36 V / 2.5 Ah adopted

LED light useful for drilling

Total height of 150 mm
to fit into 200 mm height I-beams

Various safety functions

*Plate thickness detection, drilling load detection and main unit lifting detection assists drilling.

Specifications and designs are subject to change at any time without notice. The contents of this catalog are current as of December 2022.

Battery Pack, Battery Charger and Carry Case are not included. Use the battery (Model: BSL36A18/BSL36B18) and charger (Model: UC18YSL3) manufactured by Koki Holdings Co., Ltd. Read the instruction manual of Koki Holdings Co., Ltd., on how to use the battery and charger. For further information about the battery and charger, contact Koki Holdings Co., Ltd.

