



# 實利達有限公司

## SRITA SENDIRIAN BERHAD

Reg. No. 49662-V



Quick Connect Couplings  
Air Tools  
Machine Tools



Electric Screwdrivers  
Spring Balancers



Linear Air Compressors, Vacuum Pumps & Air Blowers



Tube, Fittings & Spiral Hoses



Tube & Fittings



Eightron Industrial Hoses



Metal Cutting Drills, Taps & Endmills



Pneumatic Components



Air Impact Wrenches



Precision Die Grinders



Air Screwdrivers



Driver Bits



Air Nippers



Hand Tools



Air Hose Reels



Paint Spray Guns



KURITA

Air Dusters



Impact Sockets



Hand Sockets



Spring Balancers




Air Hose Balancers



Toggle Clamps

# SRITA

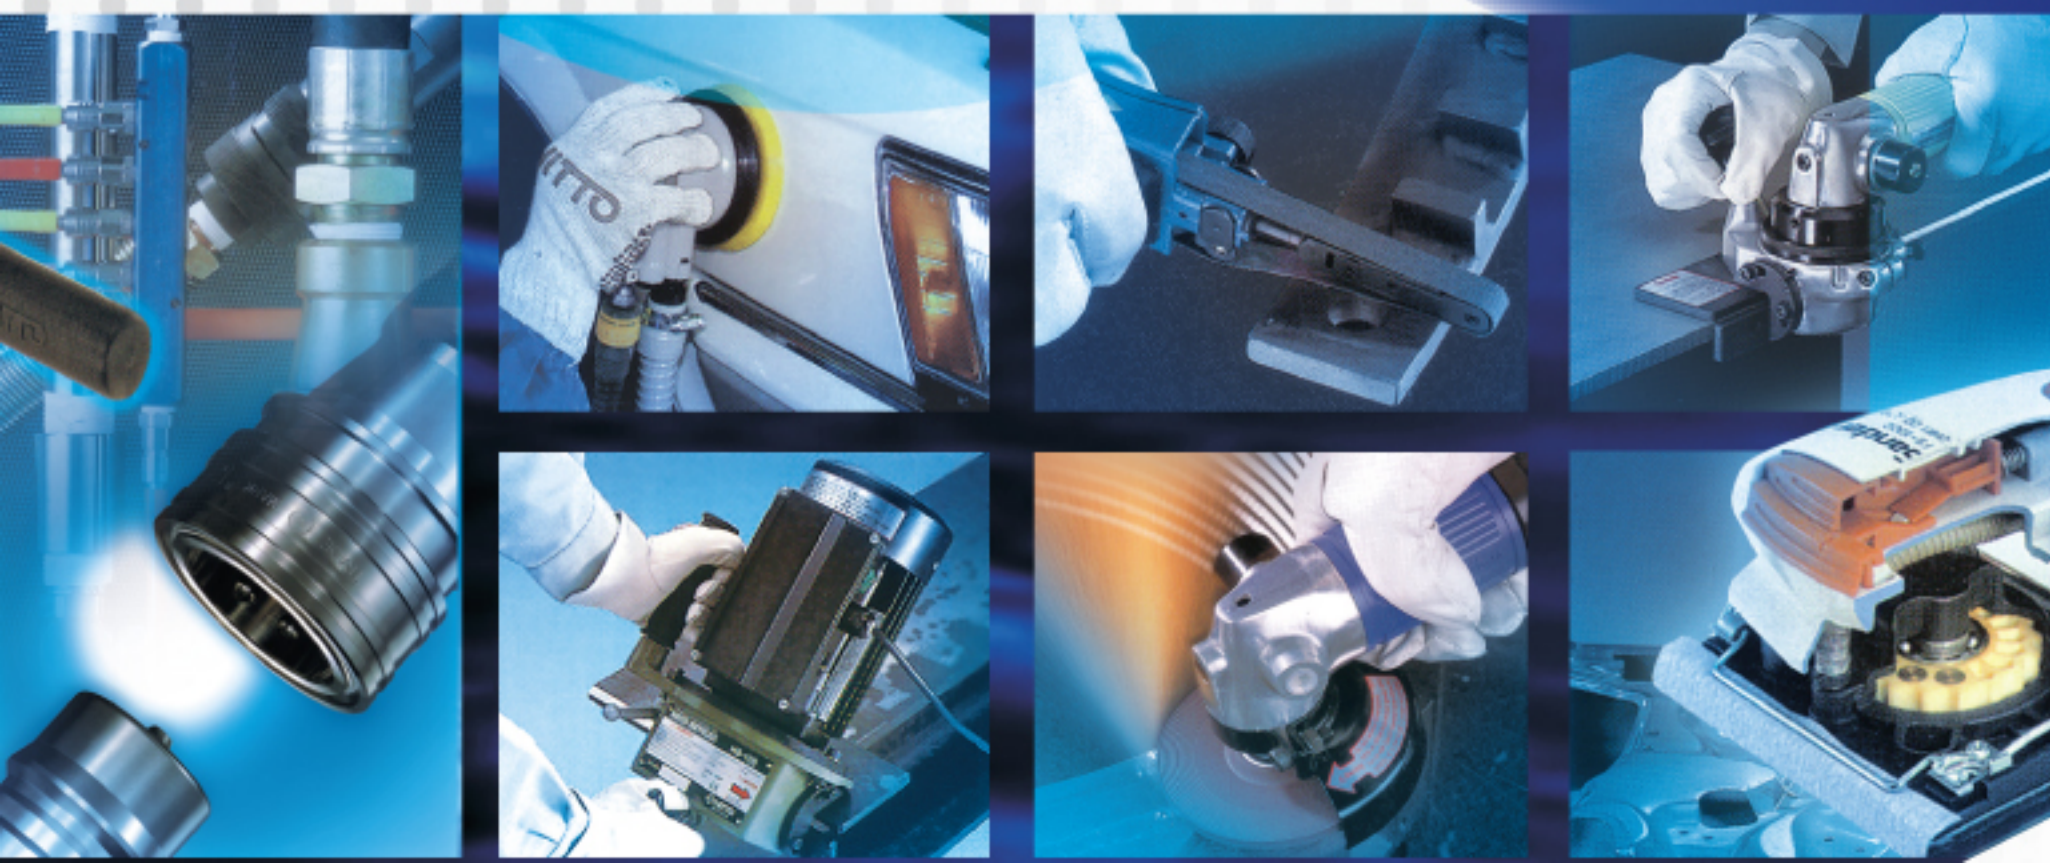

SCAN HERE



實利達有限公司  
SRITA SENDIRIAN BERHAD



Head Office in Klang



Penang Office



Johor Office



Melaka Office

**Srita Sendirian Berhad**, established since 1979, is an importer / distributor specialized in fastening tools, machine tools, pneumatic tools & components, quick-connect couplings and fittings, hoses and tubings, industrial handtools, paint spray guns and other related products. Based in Klang with branch offices in Penang, Melaka and Johor Bahru, and over 800 dealers across the country, Srita is well positioned as a reliable and trusted supplier of quality industrial products in Malaysia.

**Srita Sendirian Berhad** has a total of 50 employees, the majority consisting of sales personnel. The sales function are divided in to the Machine Tool Division, Tool Division, Pneumatic Division, Hardware Division and Coupling Division.

Srita is proud to be well-known for our strong after sales support provided by our fulltime staff in the Service Department. Service and repairs are performed locally using procedures and jigs recommended by manufacturer. In line with its primary function, Service Department gathers actual product performance data crucial for product development.

We are constantly developing new products to fully utilize our well-established sales network.

## Division

### Machine Tool Division

Machine Tools, Spares and Accessories.

### Tool Division

Pneumatic and Electric Tools,  
Consumables and Accessories: Driver Bits, Spring Balancers, Hose Reels.

### Pneumatic Division

Pneumatic Equipment Components, Hoses, Tubings and Fittings, Air Compressors & Vacuum Pumps.

### Hardware Division

Hi-Cupla, Handtools, Air Dusters, Paint Spray Guns, etc.

### Coupling Division

Quick Connect Couplers for Various Fluid Lines.



# Electric Screwdrivers

High Repeatable Torque Accuracy

### Specifications:

Torque range	0.2 - 70 (kgf-cm) 0.02 - 7 (Nm)
Screw Size	machine screw (up to 8mm) tapping screw (up to 6mm)
Voltage Input	20VDC, 40VDC, 100VAC 115VAC, 230VAC
Starting Method	lever start & push to start

### Transformerless Type DLV7104/8104/8204 Series



Lever Type

Pistol Type

Push to Start

### C Series (Current control Type) Model DLV04C/10C/45C [CE]



Thirty different torque settings can be set on a single screwdriver!

### S Series (Variable speed Type) Model DLV30S/45S/70S [CE]



### DLV7300 Series



### Screw Fastening Counter

#### DLR5040A-WE

Prevention of human fastening errors and enhanced fastening management accuracy



### Brushless Type DLV30A/45A/70A Series (Transformerless Type)



Push to Start

Pistol Type

Lever Type

### Automation Series DLV30A/45A/70A Series



Accessories

### LINK FUNCTION



Shaker Box


Vacuum Pump

Torque Checker



# Air Compressors, Vacuum Pumps, Blowers, Liquid Pumps

Medo pumps are unique products that feature a patented linear-motor-driven free piston system. Utilised in varied applications, from life support systems to robotics, Nitto Kohki has developed a comprehensive series of precision air compressors and vacuum pumps that incorporate this uniquely functional design. Proven throughout the world for over two decades, we are proud to have been selected by many leading companies in advanced industries as their primary supplier of air compressor type equipment.

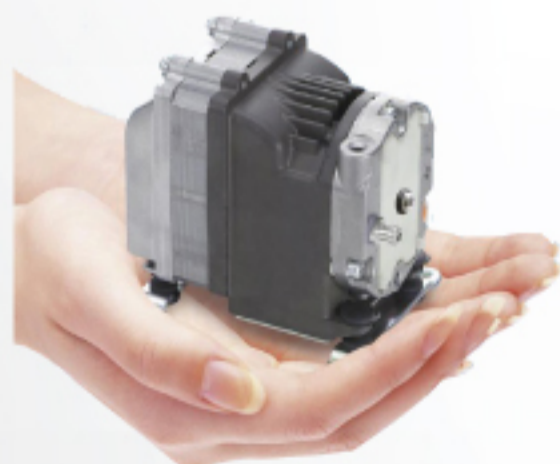

### Air Compressor

#### DAH & AC SERIES AC/DC Voltage

Rated Pressure: 0.2~3.0 bar  
Rated Airflow: 0.8~80 L/min

Applications:

- Medical Equipment
- Analyzers



### Vacuum Pump

#### DVH & VP SERIES AC/DC Voltage

Attainable Vacuum: -250 to -700 mmHg  
Free Air Displacement: 3~60 L/min

Applications:

- Machine Screw Feeder
- Material Handling Machine



### Air Blower

#### LA SERIES AC Voltage

Rated Pressure: 0.11~0.2 bar  
Rated Airflow: 28~200 L/min

Applications:

- Aerobic Sewage Treatment System
- Fish Pond Bubbling



### Diaphragm Pump

#### VC & DP SERIES AC Voltage

Attainable Vacuum: -76 to -500 mmHg  
Free Air Displacement: 2.5~7.5 L/min  
Rated Pressure: 0.04~2.5 bar  
Rated Airflow: 6~25 L/min

Applications:

- Medical Cup Suction
- Massage devices



### Piezoelectric Pump

#### BPH SERIES AC Voltage

Discharge Pressure: 10~35 kPa  
Flow Rate: 30~500 mL/min  
Self-priming Pressure: 0.4~12 kPa

Applications:

- Suitable for pumping both liquids and gases.
- Liquids for medical injection and gases for pressure expansion



# MACHINE

ELECTRIC &amp;

## ATRA ACE

### Portable Magnetic Drilling Machine

MODEL	Specification	Hole Capacity	Plate Thickness	Magnet Holding Power	Free Speed	Weight
LO-3550		Ø12-35mm	6-50mm	561kgf	950rpm	8.7kg
WOJ-3200		Ø12-32mm	9-50mm	918kgf	870rpm	13kg
AO-5575A		Ø12-55mm	9-75mm	1020kgf	520rpm	17.5kg
WA-3500		Ø12-35mm	9-50mm	720kgf	950rpm	20kg
WA-5000		Ø12-50mm	9-75mm	1000kgf	350/650rpm	23kg
QA-4000		Ø12-40mm	9-35mm	680kgf	750rpm	18.5kg
QA-6500		Ø12-65mm	9-50mm	1000kgf	400/750rpm	26kg
ARA-100A		Ø51-100mm	13-75mm	1733kgf	110~210/330~660rpm	30kg

### Portable "Cordless" Magnetic Drilling Machine

MODEL	Specification	Hole Capacity	Plate Thickness	Magnet Holding Power	Free Speed	Weight
CLO-2725 (NN)		Ø12-27mm	6-25mm	561kgf	820	9kg

\*Power Source : Single Phase AC 220V ~ 240V

## ATRA ACE



WOJ-3200 (Manual)



AO-5575A (Manual)



WA-5000 (Semi-Automatic)



QA-series (Fully-Automatic)



LO-3550



CLO-2725 (NN)

### JETBROACH One-Touch type



Tungsten Carbide Annular Cutters-(TCT)	
Cutting Capacity	Ø12 - 100 mm
Cutting Depth	25/35/50/75mm

### HI-BROACH One-Touch type



High Speed Steel Annular Cutters-(HSS)	
Cutting Capacity	Ø12 - 32 mm
Cutting Depth	25 / 50 mm

\*Resharpener Service is Available




ARA-100A



# TOOLS

HYDRAULIC

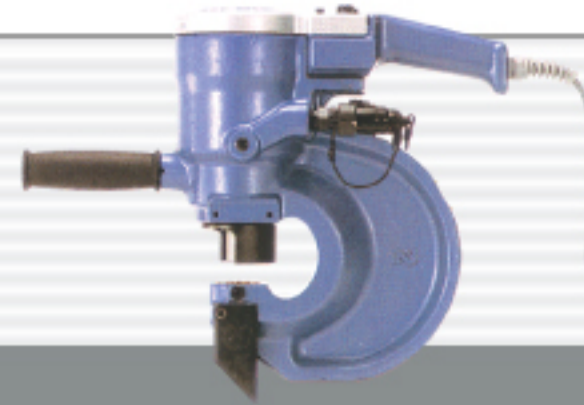

## SELFER ACE


## HANDY SELFER

Portable Hydraulic & Electrical Punching "Selfer" Series

MODEL	Specification	Max Hole Capacity	Max Punching Thickness	Max Throat Depth	Punching Time	Weight
HS11-1624		Ø8-24mm	16mm	110mm	11.8sec	30kg
HS07-1624		Ø8-24mm	16mm	70mm	11.8sec	30kg
HS06-1322		Ø8-22mm	13mm	60mm	7.9sec	20.5kg
E55-0619		Ø6-19mm	6mm	55mm	2sec	14kg
E25-0615		Ø4-15mm	6mm	25mm	4sec	7kg

Power Source : Single Phase AC 220V ~ 240V


### SELFER ACE

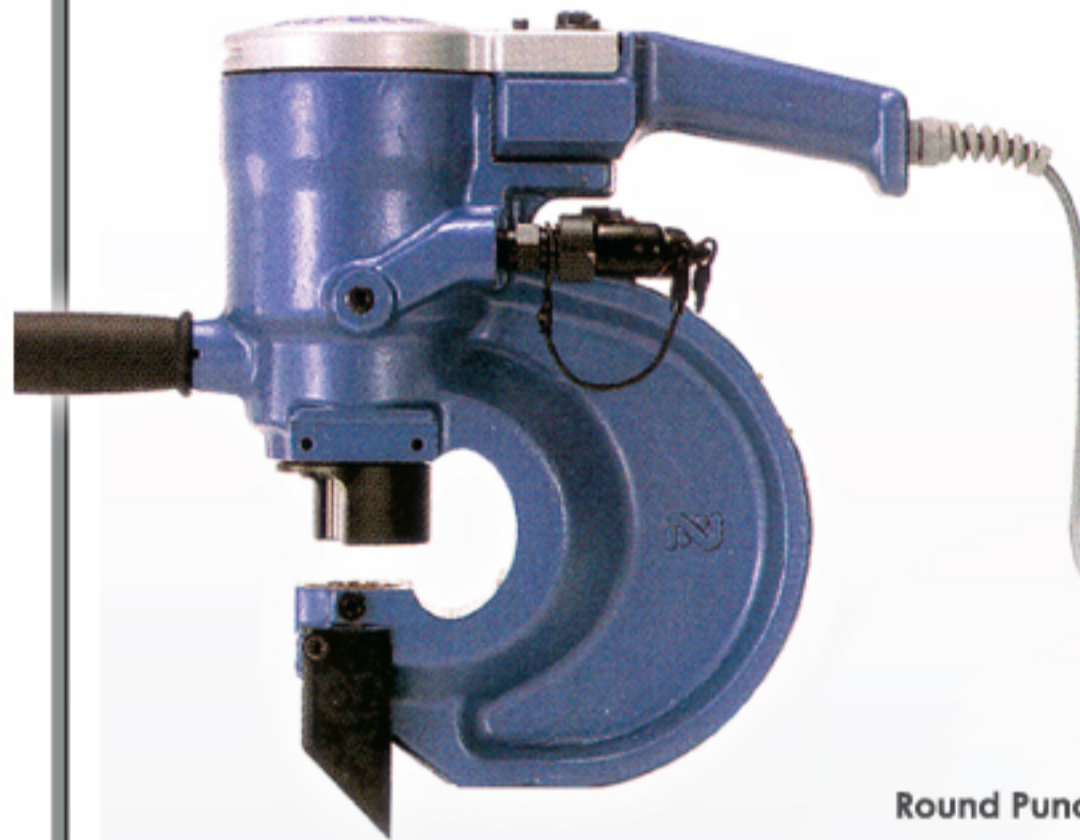

Double-Action Hydraulic Pump



Application

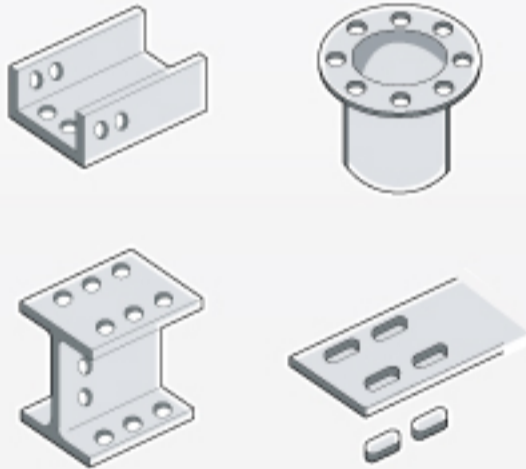

Round Punch



Round Die



Punches and Dies for Round Holes

Roll Pin

Oblong hole Punch

Setting Jig

Oblong hole Die

Punches and Dies for Oblong Holes

### HANDY SELFER



E25-0615




E55-0619

### HAND BEVELER

PORTABLE BEVELING TOOL

Chamfering Capacity 0-15C  
Chamfering Angle 15-45°


HB-15B

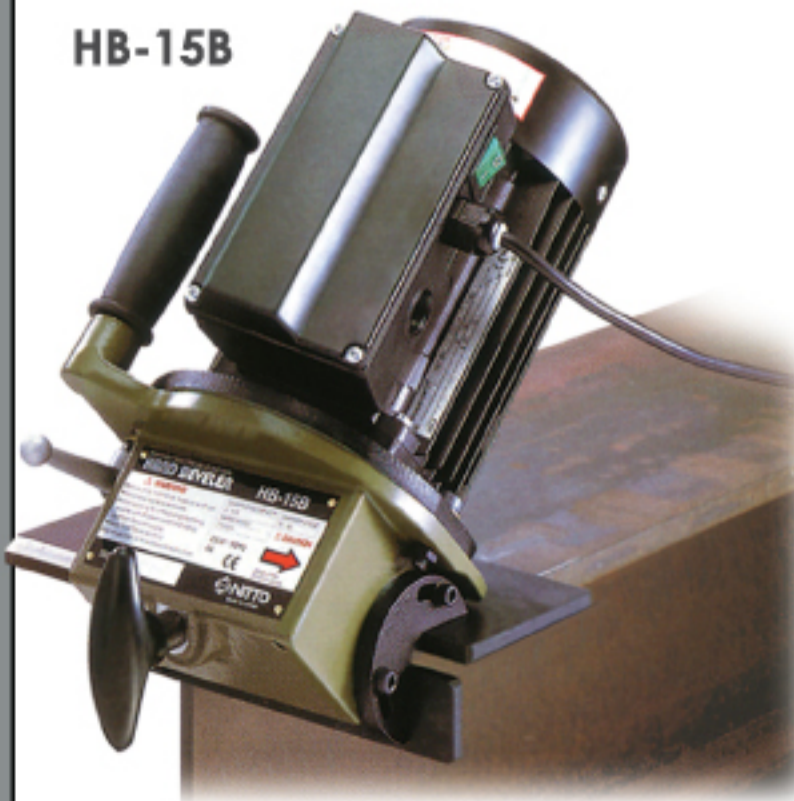

### ATRA MASTER

PORTABLE MAGNETIC DRILL STAND

M-320  
Hole capacity Ø 32mm

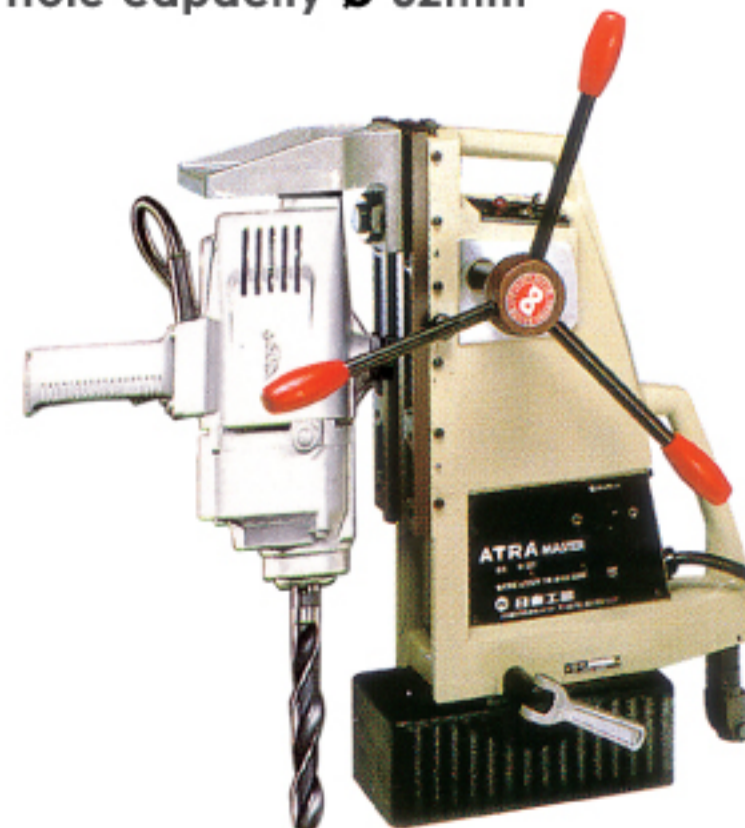


### HYDRAULIC MULTI WORKER

FOR ANGLE BAR UP TO 50MM

Multi Worker MW-20

Pump HPS-05

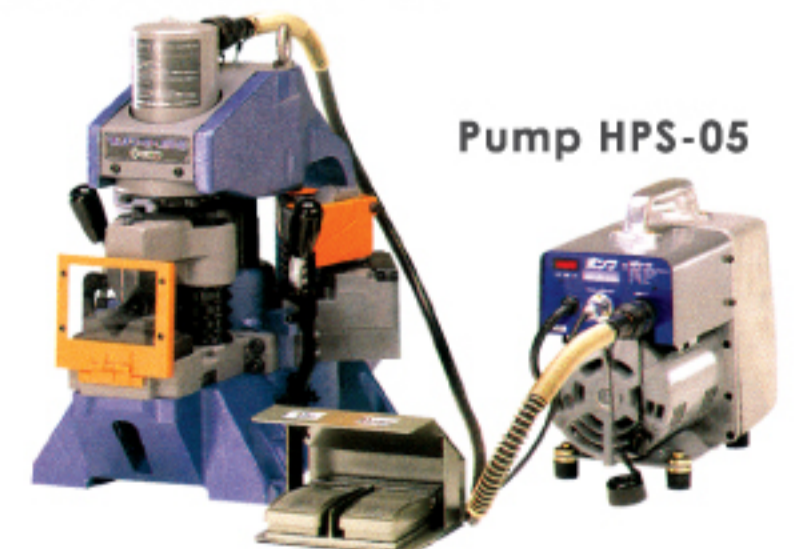

Applicable to stainless steel angle bar process.  
SUS304 Max. thickness 3mm



# POWER

P N E U M A T I C &

## SCALING

### PNEUMATIC NEEDLE SCALER

#### JET CHISEL



JEX-28

MODEL	JC-16	JT-20	JEX-24	JEX-28
TYPE	Light-weight	Straight	Universal	Heavy duty
Stroke speed min <sup>-1</sup>	4000	4000	4000	4500
for needles Ø (mm)	2	2&3	2&3	2,3&4

### AIR HAMMER

#### AUTO CHISEL



MODEL	A-300
TYPE	Pistol
Stroke speed min <sup>-1</sup>	2600

### PNEUMATIC SCALER

#### SUPER KELEN



MODEL	S-250	S-500	S-1000
Bar length	630 mm	890 mm	1,470 mm
Stroke speed min <sup>-1</sup>	2500	2500	2500
Chisel Shank Ø	12.7 mm	12.7 mm	12.7 mm

### PNEUMATIC CHIPPING HAMMER

#### AIR CHIPPER



MODEL	ACH-16	CH-24
TYPE	Straight	Straight
Stroke speed min <sup>-1</sup>	6000	4000

## GRINDING

### PNEUMATIC GRINDER

#### MYTON



MG-40

MODEL	MYG-25L	MG-40	MYG-70
Disc size	58mm(2.5")	100mm(4")	180mm(7")
Rated speed	19000 rpm	13000 rpm	7600 rpm
Arbor hole	6 mm dia.	16 mm dia.	22 mm dia.

## SANDING

### PNEUMATIC GRINDER

#### MYTON



MYS-20

MODEL	MYS-20L	MYS-40	MYS-70
Disc size	Max.50mm(2")	100mm(4")	180mm(7")
Rated speed	19000 rpm	13700 rpm	7600 rpm
Chuck	6 mm dia.	-	-
Arbor hole	-	16 mm dia.	22 mm dia.

## GRINDING

### PNEUMATIC DIE GRINDER

#### AIR SONIC



L-25B

MODEL	L-25B	L-35C	AL-55A
Rated speed	27000 rpm	37500 rpm	56500 rpm
Type	Double-lock lever	Double-lock lever	Twist grip
Collet chuck	6 mm I.D.	6 mm I.D.	3 mm I.D.

## SANDING

### PNEUMATIC BELT SANDER

#### BELTON



B-10CL

MODEL	B-10CL	B-20CL	B-30CL
Type	Light-weight	Universal	Heavy Duty
Belt size (mm) W x L	10 x 330	20 x 520	30 x 540
Rated speed	17,000 rpm	18,000 rpm	15,000 rpm

## SANDING

### PNEUMATIC COMPACT SANDER

#### PALM ORBITAL SANDER



APS-125

MODEL	APS-125	APS-150
Pad size	125mm	150mm
Rated speed	10,000 rpm	10,000 rpm
Orbit dia	5mm	5mm

### HANDY PNEUMATIC SANDER

#### FREE SANDER




FS-100C

MODEL	FS-50A	FS-100C
Pad size	75 x 82	100 x 110
Rated speed	15,000 rpm	20,000 rpm
Orbit dia	1.2mm	1.5mm

### PNEUMATIC RECIPROCATING SANDER

#### LINE SANDER

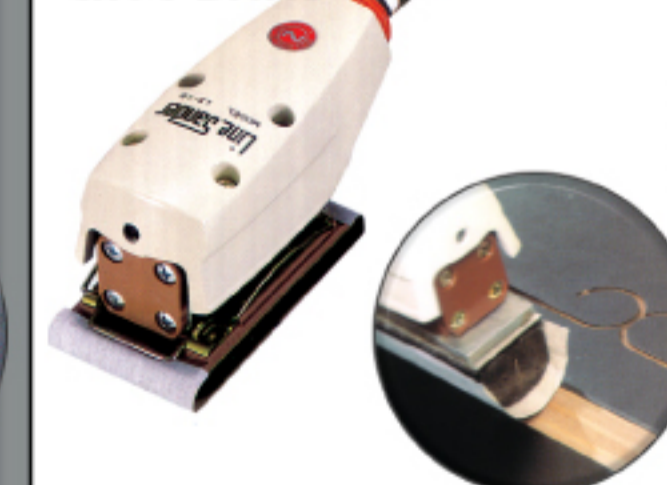

MODEL	LS-10
Pad size	55 x 103
Rated speed min <sup>-1</sup>	4000
Stroke	4mm


### HANDY PNEUMATIC SANDER

#### COMPACT MULTI SANDER



CMX-20

MODEL	CMX-20
Orbit dia	2mm
Rated speed	13000 rpm
Weight	0.53kg

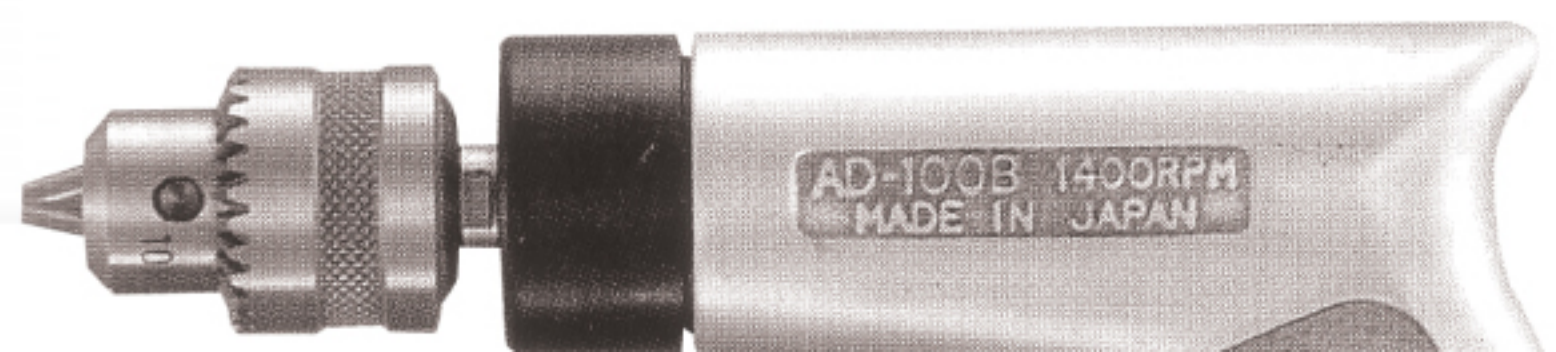



# TOOLS

ELECTRIC



JQA-EM4057



JQA-2042

## FINISHING

ELECTRIC MILL SCALE REMOVER

**MILL SCALER**



MODEL	EMS-110A
Power Consumption	1020 W
Rated Duty	4.6 A
Rated speed	3800 rpm

WELD BURN REMOVER

**BRIGHTER** for stainless steel



MODEL	EBT-100A
Power Consumption	1020 W
Brighter Wheel	∅100 mm
Rated speed	3800 rpm

## SANDING

ELECTRIC BELT SANDER

**BELTON**



MODEL	EB-20A	EB-30A
Power Consumption	510 W	1020 W
Belt size	20 x 520 mm	30 x 540 mm
Rated speed	11500 rpm	11000 rpm

## DRILLING

PNEUMATIC HAND DRILL

**AIR DRILL**



MODEL	ADR-65	ADR-100
Drill capacity	6.5 mm (1/4")	10 mm (3/8")
Rated speed	2900 rpm	2000 rpm
Weight	0.8 kg	1.1 kg

## CHAMFERING

PNEUMATIC CHAMFERING TOOL

**MINI BEVELER**



MODEL	AMB-0307
Chamfering capacity	Stainless Steel 0C-3C or 2R, 3R, 4R Mild Steel 0C-7C or 2R, 3R, 4R
Chamfer angle	15~45°
Rated speed	14000 rpm

RADIAL CHAMFERING TOOL

**CIRCUIT BEVELER**



MODEL	CB-02	CBR-03
Chamfering capacity	0C-2C, 2R	3R
Beveling angle	45°	45°
Rated speed	15000 rpm	12000 rpm

RADIAL CHAMFERING TOOL

**CIRCUIT BEVELER (MINI)**



MODEL	CB-01
Chamfering capacity	0C-1C
Beveling angle	45°
Rated speed	28000 rpm

ELECTRIC CHAMFERING TOOL

**MINI BEVELER**



MODEL	MB-03A	EMB-0307C
Chamfering capacity	0C-3C, 2R, 3R	0C-7C, 2R, 3R, 4R
Beveling angle	45°	15~45°
Rated speed	7100 rpm	12,700 rpm

## DEBURRING

PNEUMATIC DEBURRING TOOL

**BURR CUTTER**



MODEL	BC-005
Deburring Hole	3 to 34mm
Rated speed	420rpm
Shank	6, 8, 10 & 12mm

## FILING

PORTABLE PRECISION FINISHING FILE

**SUPER HAND**



MODEL	SH-100A	ASH-900	SHL-40
Shank	6.3mm dia	5mm dia	3mm dia
Rated speed min <sup>-1</sup>	3700	6300	9000
Stroke	9mm	9mm	4mm

## FINISHING

PORTABLE FINE FINISHING FILE

**MICRO AIR HAND**



MODEL	MAH-05	MAH-16
Shank	3mm	3mm
Rated speed min <sup>-1</sup>	22000	13000
Stroke	0.5mm	1.6mm

## CUTTING

PNEUMATIC HACKSAW

**SUPER SAW**



MODEL	SSW-110
Capacity	Max. 3mm (Mild Steel)
Rated speed min <sup>-1</sup>	7000
Stroke	11mm



# HI CUPLA®





• Working pressure  
1.5  
1.5 MPa

• Valve structure  
One-way shut-off

• Applicable fluids  
Air Water

## PLUG




**P**

■ For hose connection	40PH	For 1/2" hose	<b>PH type</b>	
17PH	For 1/4" hose	400PH	For 1/2" hose	
20PH	For 1/4" hose	600PH	For 3/4" hose	
30PH	For 3/8" hose	800PH	For 1" hose	
■ For female thread connection	40PM	For Rc1/2"	<b>PM type</b>	
10PM	For Rc1/8"	400PM	For Rc1/2"	
20PM	For Rc1/4"	600PM	For Rc3/4"	
30PM	For Rc3/8"	800PM	For Rc1"	
■ For male thread connection			<b>PF type</b>	
20PF	For R1/4"	400PF	For R1/2"	
30PF	For R3/8"	600PF	For R3/4"	
40PF	For R1/2"	800PF	For R1"	
■ For male thread connection (parallel thread)			<b>PFF type</b>	
20PFF	For G1/4"			

• Available with steel, brass or stainless steel body.  
• Steel applies to air only.

**S**

## SOCKET

<b>SH type</b>	■ For hose connection	40SH	For 1/2" hose	
	17SH	For 1/4" hose	400SH	For 1/2" hose
	20SH	For 1/4" hose	600SH	For 3/4" hose
	30SH	For 3/8" hose	800SH	For 1" hose
<b>SM type</b>	■ For female thread connection	40SM	For Rc1/2"	
	10SM	For Rc1/8"	400SM	For Rc1/2"
	20SM	For Rc1/4"	600SM	For Rc3/4"
	30SM	For Rc3/8"	800SM	For Rc1"
<b>SF type</b>	■ For male thread connection			
	20SF	For R1/4"	400SF	For R1/2"
	30SF	For R3/8"	600SF	For R3/4"
	40SF	For R1/2"	800SF	For R1"

### QUICK CONNECTIVE COUPLINGS FOR AIR EQUIPMENT

- \* One-way shut-off cupla with an automatic shut-off valve in the socket
- \* Important parts are hardened for excellent wear resistant and durability
- \* Accuracy is obtained from connection/disconnection testing of 100,000 times

Important parts are hardened (steel).

Interchangeable with Hi Cupla 200,  
Hi Cupla Ace, Nut Cupla, Nut Cupla 200,  
Line Cupla, etc.















Automatic shut-off valve in socket.


Available with steel, brass or stainless  
steel body.

Available in various sizes and types of  
connections.



# Refrigeration Automotive Air Conditioning Cupla Series (Custom Made)


















Vacuum/coolant Type <b>SP-V Type</b>		<ul style="list-style-type: none"> <li>• Product developed specially for vacuums and Freon refilling.</li> <li>• Has packing material that handles Freon substitutes.</li> </ul>	For Expanded Pipes <b>PCB Type</b>		<ul style="list-style-type: none"> <li>• Double-packing possible on the inner diameter portion and edge surface portion of the piping.</li> </ul>
For Connection to Straight Aluminum-copper Piping <b>PCV Type</b>		<ul style="list-style-type: none"> <li>• Detachable with no pipe forming.</li> <li>• Perfect for pressure testing, vacuums and Freon gas filling.</li> </ul>	For Bulge Piping and Spool Piping <b>PCBW Type</b>		<ul style="list-style-type: none"> <li>• Two-row ball lock system prevents pipe from falling over.</li> </ul>
Screws onto Male thread <b>NCF Type</b>		<ul style="list-style-type: none"> <li>• Easy, direct-screw-in to male screws.</li> <li>• Packing employs specially designed "stepped-lip packing."</li> </ul>	For Straight Pipes <b>PCBL Type</b>		<ul style="list-style-type: none"> <li>• Structure uses balls to lock outer diameter of pipe to improve detachability using the lever.</li> </ul>
For gas charging <b>CS Type</b>		<ul style="list-style-type: none"> <li>• Connects to SP-V type plug.</li> <li>• Detachable under pressure.</li> </ul>	For Expansion of Straight Pipes with Rubber Valves <b>PCW Type</b>		<ul style="list-style-type: none"> <li>• Structure allows some variations in pipe dimensions.</li> </ul>
For Gas Charging (With purge function) <b>CNR Type</b>		<ul style="list-style-type: none"> <li>• Connects to SP-V type plug.</li> <li>• Detachable under pressure.</li> <li>• Easy plug separation because residual pressure is purged by lifting lever.</li> </ul>	For Special Pipes <b>PCD Type</b>		<ul style="list-style-type: none"> <li>• Handles wide range of uses for special pipes.</li> </ul>
For Gas Charging <b>CNA Type</b>		<ul style="list-style-type: none"> <li>• Employs an air-less structure to hold down the mixing of air when connecting and fluid leaks when separating.</li> </ul>	For Bead Pipes <b>PCH Type</b>		<ul style="list-style-type: none"> <li>• Employs collet clamp system for improved pressure resistance.</li> </ul>
For Automatic Plug Disconnection <b>ACV Type</b>		<ul style="list-style-type: none"> <li>• Connects to SP-V type plug.</li> <li>• Air drive to separate plug.</li> </ul>	For Pipe Inner Wall Lock <b>PCIF Type</b>		<ul style="list-style-type: none"> <li>• Highly effective in narrow spaces because of the structure placing the clamp in the pipe inner wall.</li> </ul>




















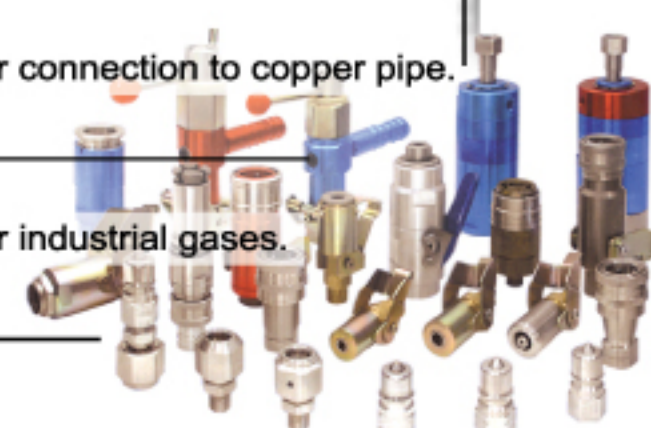
# CUPLA®



World's Leading Manufacturer  
NITTO KOHKI's Quick-action Couplings

Model & Appearance	Recommended use
<b>Air</b>	
<b>Hi Cupla</b> 	General purpose Cupla for air lines.
<b>Hi Cupla 200</b> 	One-touch Cupla for air lines.
<b>Nut Cupla</b> 	For polyurethane tubing and spiral hose.
<b>Rotary Nut Cupla</b> 	Nut Cupla with swivel mechanism
<b>Purge Hi Cupla</b> 	Air line Cupla with purge mechanism.
<b>Rotary Line Cupla RT type</b> 	Rotating type simple branching air line Cupla.
<b>Rotary Line Cupla RE type</b> 	Rotating type simple branching air line Cupla.
<b>Line Cupla 200T</b> 	Simple branching air line Cupla.
<b>Line Cupla 200L</b> 	Simple branching air line Cupla.
<b>Line Cupla 200S</b> 	Simple branching air line Cupla.
<b>Hi Cupla Ace</b> 	Lightweight plastic Cupla for piping connections.
<b>Twist Plug</b> 	For pneumatic tools and devices.
<b>Micro Cupla</b> 	For piping of pneumatic control devices.
<b>Micro Line Cupla</b> 	Lightweight and compact for use on scientific equipment.
<b>Small Cupla</b> 	Lightweight and compact for use on scientific equipment.
<b>Small Line Cupla</b> 	Lightweight and compact for use on scientific equipment.
<b>Super Cupla</b> 	Light, compact for piping connections.


Model & Appearance	Recommended use
<b>Oxygen / Fuel Gas</b>	
<b>Mini Cupla Super</b> 	Heavy duty model for use on gas welders / cutters.
<b>Gases and Liquids</b>	
<b>SP Cupla</b> 	For medium pressure and general purpose.
<b>TSP Cupla</b> 	For medium pressure and general pressure.
<b>Zeropill Cupla</b> 	For medium pressure and general purpose.
<b>Hydraulics</b>	
<b>HSP Cupla</b> 	For hydraulic pressures up to 20.6 MPa (210 kgf/cm <sup>2</sup> ).
<b>210 Cupla</b> 	For hydraulic pressures up to 20.6 MPa (210 kgf/cm <sup>2</sup> ).
<b>S210 Cupla</b> 	Stainless steel for 20.6 MPa (210 kgf/cm <sup>2</sup> ) high pressure.
<b>280 Cupla</b> 	For 27.5 ~ 31.5 MPa (281 ~ 321 kgf/cm <sup>2</sup> ) hydraulic pressure.
<b>350 Cupla</b> 	For hydraulic pressures up to 34.5 MPa (352 kgf/cm <sup>2</sup> ).
<b>450B Cupla</b> 	For hydraulic pressures up to 44.1 MPa (450 kgf/cm <sup>2</sup> ).
<b>700R Cupla</b> 	For hydraulic pressures up to 68.6 MPa (700 kgf/cm <sup>2</sup> ).
<b>Cooling water and heating oil (for mold)</b>	
<b>Mold Cupla</b> 	General purpose type and mold coolant port coupling.
<b>Flow Meter</b> 	Specialized flow meter with valve for molds.
<b>Dialysis Fluid</b>	
<b>Artificial Kidney Cupla (Plastic)</b> 	For dialyzer piping.
<b>Inert Gas / Vacuum</b>	
<b>SP-V Cupla</b> 	For vacuum.
<b>PCV Pipe Cupla</b> 	For connection to copper pipe.
<b>Charge Cupla CS Type</b> 	For industrial gases.





**FINEST  
TUBE &  
FITTINGS**


## Anti Spatter Tubing / Fitting

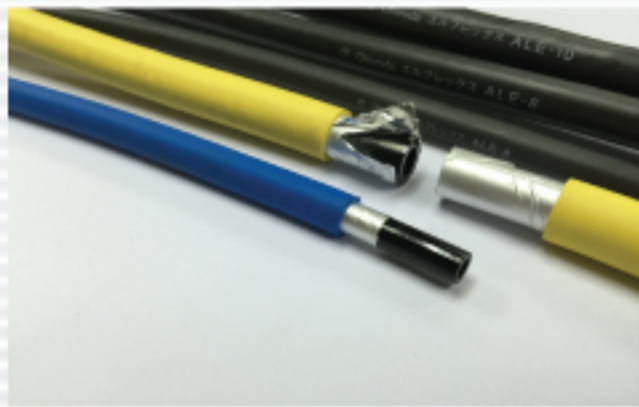

**ALE - Double Protection**  
(Aluminium Film and Polyolefine)



**LE - Single Protection**  
(Polyolefine - Flame Resistant Type)

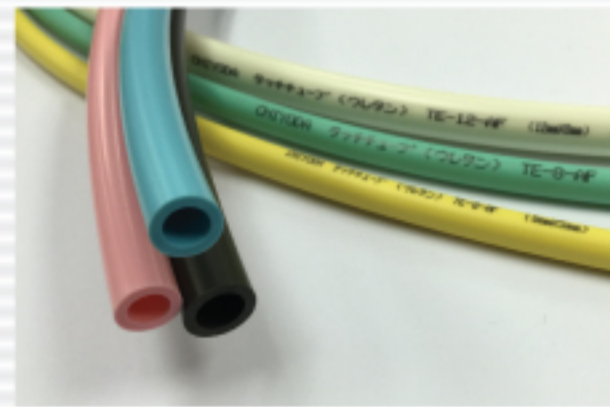

**TE-AF**  
(Polyether base PUR Material)




**BG-50 Air Gun**




**CK Type Fitting**




**Fuji Type Fitting**

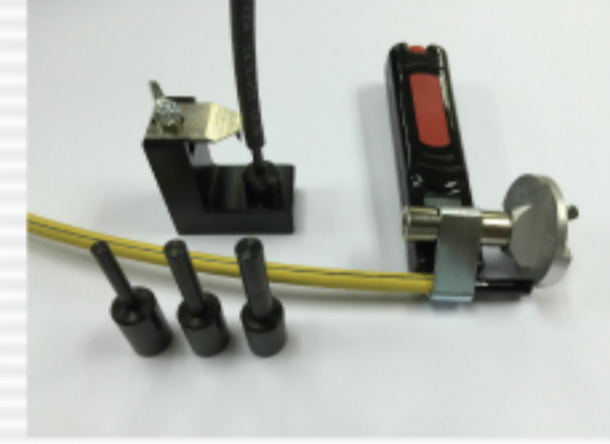

**Cover Peeler**

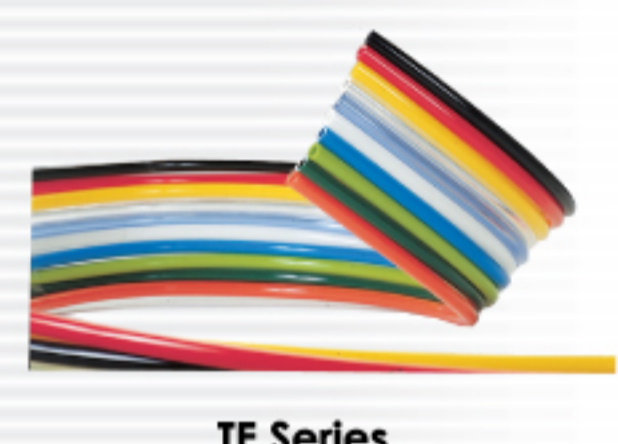


**TE Series**

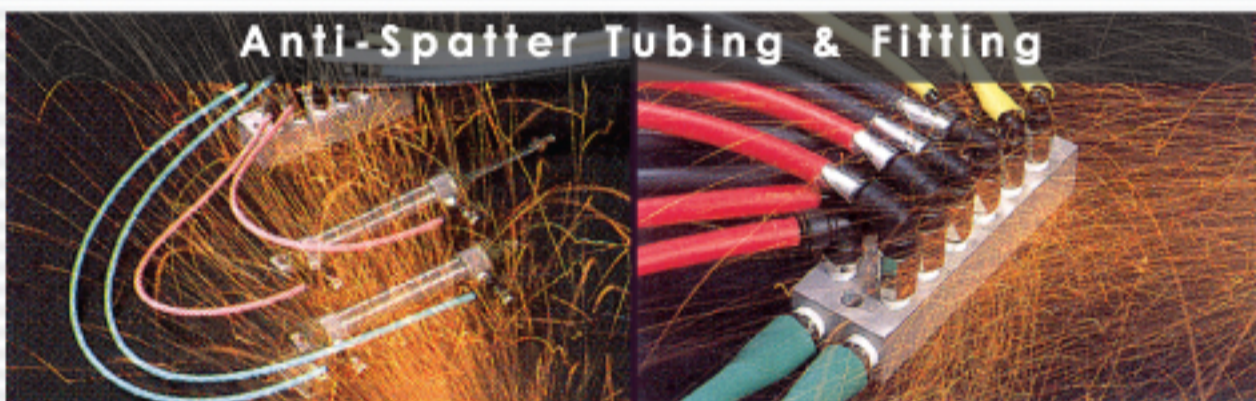

**Anti-Spatter Tubing & Fitting**



**Spiral Yellow Hoses**

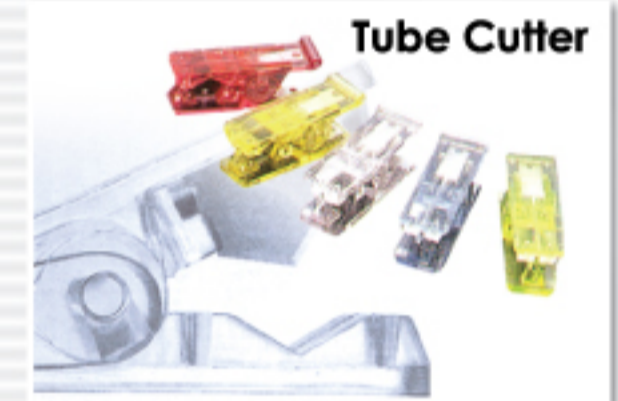

**Tube Cutter**

**HAKKO**  
CORPORATION

**EIGHTRON**  
HAKKO ORIGINAL



## INDUSTRIAL HOSE & TUBING

- ◆ Printing Machines/Paints and Solvents/Ink Hose
- ◆ Semiconductor-Related Devices/Chemical Hose
- ◆ Cosmetics/Fragrance/Food/Beverage Hose
- ◆ Medical Devices/Analytical Instruments Tubing
- ◆ Water, Oil, and Air Hose for Plant Equipment and Machine Tools

### Flexible Fluorine Resin Tubing/Hose Series



- E-SJ, E-SJ-CBU, E-SJ-BK** Flexible Fluorine (ETFE) Resin Tubing I.D.: 2 ~ 8 mm
- E-SJV** Flexible Fluorine (ETFE) Resin Tubing (PVC Type) I.D.: 6, 8 mm
- E-SJB** Flexible Fluorine (ETFE) Resin Yarn Reinforced Hose I.D.: 9 ~ 38 mm
- E-SJSP** Flexible Fluorine (ETFE) Resin SUS Spring Wire Hose I.D.: 12 ~ 38 mm
- E-SJD** Flexible Fluorine (ETFE) Resin Tubing (Dissipative Type) I.D.: 6, 8 mm
- E-SJSD** Flexible Fluorine (ETFE) Resin SUS Spring Wire Hose (Dissipative Type) I.D.: 12 ~ 25 mm
- E-PD** Flexible Fluorine (PVDF) Resin Tubing Clear I.D.: 2 ~ 8 mm
- E-PDB** Flexible Fluorine (PVDF) Resin Yarn Reinforced Hose I.D.: 9 ~ 50 mm

### Industrial Hose Series



- E-TB** Pressure Hose I.D.: 4 ~ 75 mm
- E-STB** Oil-Proof Pressure Hose I.D.: 6 ~ 50 mm
- E-SP** Spring Hose I.D.: 8 ~ 50 mm
- E-KYS** KY Sunfoods Hose I.D.: 6 ~ 50 mm

### Food Grade Hose Series



- E-KYT** KY Tube I.D.: 2 ~ 8 mm
- E-KYC** KY Coil Hose I.D.: 12 ~ 19 mm
- E-KYS** KY Sunfoods Hose I.D.: 6 ~ 50 mm
- E-OHB** KY Soft Braid Hose I.D.: 25,38,50 mm
- E-SF** Sunfoods Hose I.D.: 6 ~ 50 mm

### Air Hose Series







- E-NF** New Flex Air Hose I.D.: 6.5, 8.5, 11 mm
- E-SNF** Soft New Flex Air Hose I.D.: 6.5, 8.5 mm
- E-AFC** Air Flex-conductive Hose I.D.: 6.5, 8.9 mm
- E-TCS** Teto Color S Hose I.D.: 6.5, 8, 9.5 mm

### Solvent Transfer and Paint Hose Series



- E-SV** Solvent Transfer Hose I.D.: 6.5, 7.5, 9.5 mm
- E-PFF** Paint Flex-Fluorine Hose I.D.: 6.5 mm
- E-PFN** Paint Flex-Nylon Hose I.D.: 6.5, 8.9 mm



Made in Korea

### New "G" Series up to 20kgf/cm<sup>2</sup> (20Bar) PNEUMATIC COMPONENTS



ONE-TOUCH FITTINGS											CHECK VALVES													
<b>GPC</b> Male Straight	<b>GPCF</b> Female Straight	<b>GPG</b> Reducer	<b>GPGJ</b> Plug-In Reducer	<b>GPL(L)</b> Male Elbow	<b>GPLF</b> Female Elbow	<b>GPLL</b> Extended Male Elbow	<b>GPMM</b> Bulkhead Union	<b>GPOL</b> Hex. Holed Banjo	<b>GPST</b> Male Run Tee	<b>PP</b> Plug	<b>PCP</b> Coupler Plug	<b>GPCVU</b> Union Straight	<b>GPCVC</b> Straight											
ONE-TOUCH FITTINGS											HAND VALVES													
<b>GPT</b> Male Branch Tee	<b>GPUC</b> Union Straight	<b>GPUG</b> Different Dia of Union Tee	<b>GPUL</b> Union Elbow	<b>GPUR</b> Union Tee	<b>GPW</b> Reducer Y	<b>GPWT</b> Male Y	<b>GPXG</b> Reducer Double Y Union	<b>GPY</b> Union Y	<b>GPZA</b> Union Cross	<b>GHVFF</b> Union Straight	<b>GHVSS</b> Nipple													
COMPACT ONE-TOUCH FITTINGS								NYLON TUBINGS		POLYURETHANE TUBINGS														
<b>PC-C</b> Male Straight	<b>PL-C</b> Male Elbow	<b>PT-C</b> Male Branch Tee	<b>PY-C</b> Union Y	<b>PZA-C</b> Union Cross	<b>PUC-C</b> Union Straight	<b>PUL-C</b> Union Elbow	<b>PUT-C</b> Union Tee																	
APEX SPEED CONTROLLERS				ROTARY JOINTS				<table border="1"> <thead> <tr> <th colspan="2">Specification</th> </tr> </thead> <tbody> <tr> <td>Fluid</td> <td>AIR (No other gases or liquids)</td> </tr> <tr> <td>Working Pressure Range</td> <td>0~284PSI    0~20Kgf/cm<sup>2</sup>(0~1960kPa)</td> </tr> <tr> <td>Negative Pressure</td> <td>-29.5 in Hg    -750mmHg(10Torr)</td> </tr> <tr> <td>Temperature Range</td> <td>32~176°F    0 ~ 80°C</td> </tr> <tr> <td>Applicable Tube Material</td> <td>Polyurethane and Nylon</td> </tr> </tbody> </table>					Specification		Fluid	AIR (No other gases or liquids)	Working Pressure Range	0~284PSI    0~20Kgf/cm <sup>2</sup> (0~1960kPa)	Negative Pressure	-29.5 in Hg    -750mmHg(10Torr)	Temperature Range	32~176°F    0 ~ 80°C	Applicable Tube Material	Polyurethane and Nylon
Specification																								
Fluid	AIR (No other gases or liquids)																							
Working Pressure Range	0~284PSI    0~20Kgf/cm <sup>2</sup> (0~1960kPa)																							
Negative Pressure	-29.5 in Hg    -750mmHg(10Torr)																							
Temperature Range	32~176°F    0 ~ 80°C																							
Applicable Tube Material	Polyurethane and Nylon																							
<b>GNSE</b> Elbow	<b>GNSF</b> Union Straight	<b>NSE-C</b> Mini Elbow	<b>Metal Body</b> Elbow	<b>NRC</b> Straight	<b>NRL</b> Union Elbow	<b>NHRC</b> Straight	<b>NHRL</b> Elbow																	
BALL VALVES				TWO-TOUCH FITTINGS																				
<b>GBC</b> Straight	<b>GBL</b> Elbow	<b>GBM</b> Bulkhead Union	<b>GBUC</b> Union	<b>TC</b> Straight	<b>TL</b> Elbow	<b>TUT</b> Union Tee	<b>THL</b> Universal Elbow																	




## Holemaking, Threading & Solid Milling

JOBBER DRILLS	TAPER SHANK	CENTER DRILLS	REAMERS
<b>A100</b>  * Black & ST Finish * Range 0.2 ~ 20 mm	<b>A130</b>  * Black & ST Finish * Range 3.0 ~ 2" mm	<b>A200</b>  * Bright Finish * Range 0.5 ~ 12.5 mm	<b>B100</b>  * Bright & ST Finish * Range 1.2 ~ 40 mm
ENDMILLS	TAPS	COUNTERSINKS	ROTARY BURRS
<b>C247</b>  * Bright Finish * Range 1.0 ~ 50 mm	<b>E500</b>  * Bright & Coating Finish * Range M1 ~ M56	<b>G400</b>  * Bright Finish * Range 4.3 ~ 50 mm	<b>P801</b>  * Bright Finish * Range 3.0 ~ 16 mm

# NITTOSEIKO

Screwdriver Bits + Sockets

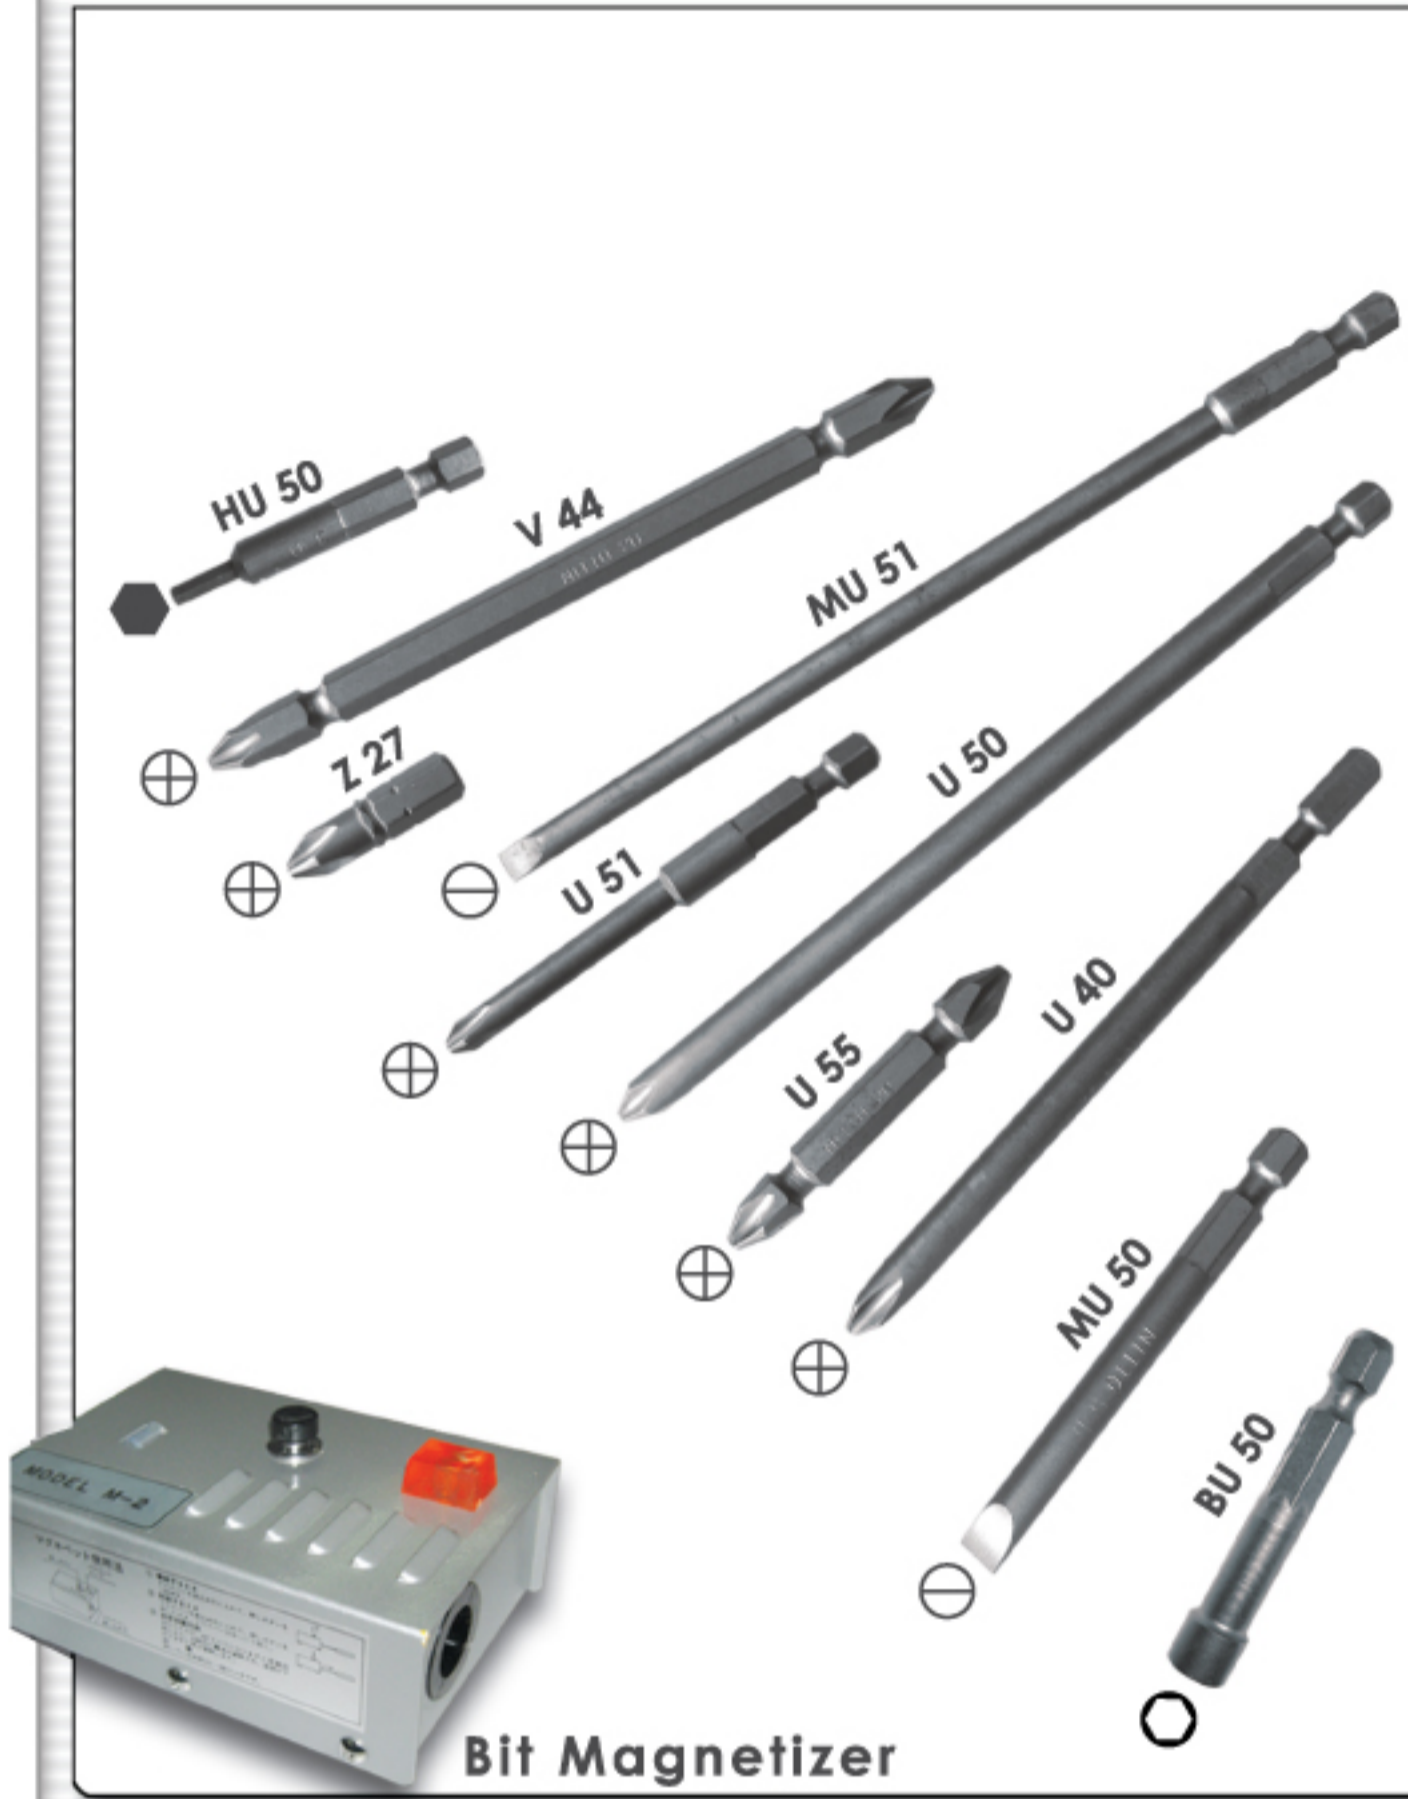

Bit Magnetizer



# UHT株式会社

Micro Die Grinder



# Star

PAINT SPRAY GUNS & AIR BRUSH



■ S-710 Series  
General-purpose  
Suction Spray Gun  
(Nozzle size : 1.3, 1.5, 1.8)

■ S-770 Series  
Professional  
Suction Spray Gun  
(Nozzle size : 1.5, 1.7, 2.0, 2.5)

■ S-106 Series  
Gravity Spray Gun  
(Nozzle size : 1.4, 1.7, 2.0)

■ SAP Series Air Brush  
with Fluid Adjustment

# NR NEW RAPID

Air Screwdrivers



## FASTENING TOOLS

- Air Shut Off (Torque Control)
  - Cushion Clutch
  - Impact Hammer
- Specifications:  
Torque Range : 0.05-22Nm  
Screw Size : 0.5 - 220kgf.cm  
: Up to 8mm




# TIGON


## SPRING BALANCER

# TOOL MATE

## SPRING BALANCER



MODEL	CAPACITY(kg)	STROKE(m)	WEIGHT(kg)
TW-1R	0.5 ~ 1.5	1.5	0.3
TW-00	0.5 ~ 1.5	0.5	0.2
TW-0	0.5 ~ 1.5	1.0	0.5
TW-3	1.0 ~ 3.0	1.3	1.4
TW-5	2.5 ~ 5.0	1.3	1.5
TW-9	4.5 ~ 9.0	1.3	3.4
TW-15	9.0 ~ 15.0	1.3	3.8
TW-22	15.0 ~ 22.0	1.5	7.2
TW-30	22.0 ~ 30.0	1.5	7.6
TW-40	30.0 ~ 40.0	1.5	9.8
TW-50	40.0 ~ 50.0	1.5	10.4
TW-60	50.0 ~ 60.0	1.5	11.6
TW-70	60.0 ~ 70.0	1.5	11.8

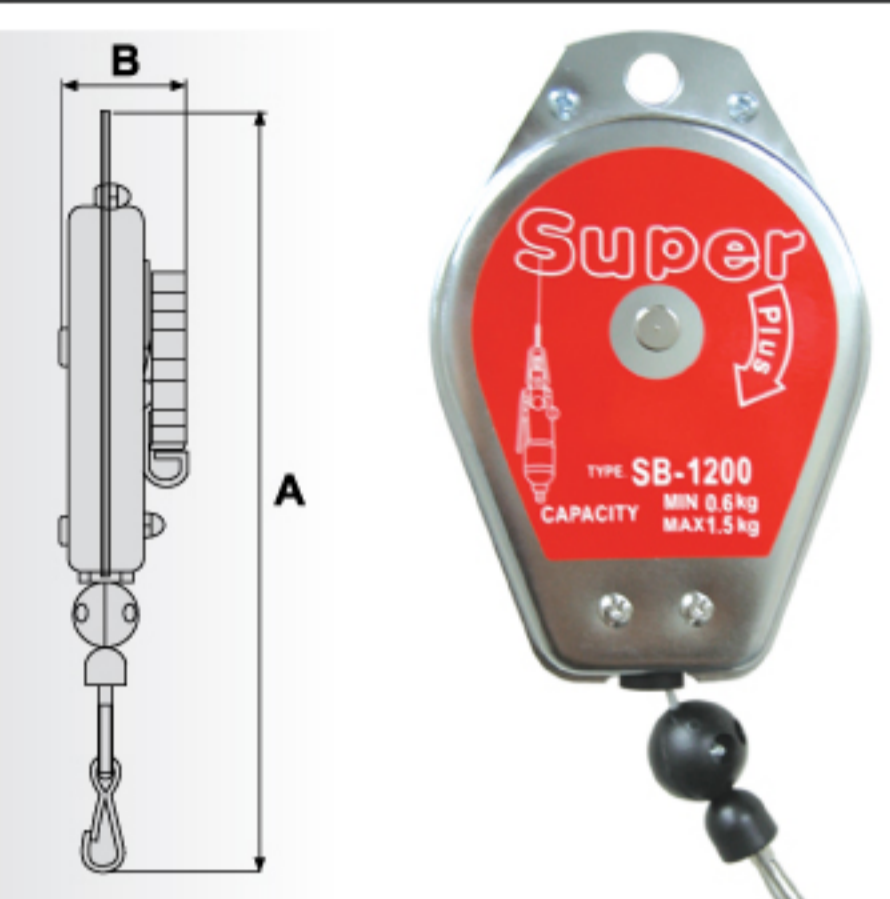

MODEL	Suspending Capacity
SB 600	0.3 - 0.8 kg.
SB 1200	0.6 - 1.5 kg.
SB 2000	1.0 - 2.0 kg.
SB 3000	1.5 - 3.0 kg.
SB 5000	3.0 - 5.0 kg.

# NIPPEI

## HANDY AIR REEL

# LINE REEL

## AIR HOSE BALANCER



The "LINE REEL" air hose balancer, without any hampering chain or rope to balance the tool, contributes to keeping the work bench and work area uncluttered for safer operation, higher productivity, less operator fatigue and longer tool life. Suspending capacity can be adjusted externally.



MODEL	Hose Size (mm)		Length(m)	Operating Pressure
	Inner Dia	Outer Dia		
HA-206N	6.4	10	6	15 kg/cm <sup>2</sup>
HA-208N	6.4	10	8	15 kg/cm <sup>2</sup>
HAP-210J-Y	6.4	10	10	15 kg/cm <sup>2</sup>
HAP-306J	8	12	6	15 kg/cm <sup>2</sup>
HAP-310J	8	12	10	15 kg/cm <sup>2</sup>
HA-413	10	14	13	15 kg/cm <sup>2</sup>

## AIR HOSE BALANCER

# HR-09

### SPECIFICATIONS :

MAXIMUM WEIGHT TO SUPPORT	1.5kg (3.3lb)
WORKING AIR PRESSURE	10kg/cm <sup>2</sup> (140PSI)
ROLLED LENGHT IN THE REEL	1200 m/m
WEIGHT	850g (1.87lb)



**AIR RATCHETS & IMPACT WRENCHES**



**IMPACT SOCKETS & ACCESSORIES**



**Kosha-An<sup>®</sup>**



*Made Of Chrome Molybdenum Alloy Steel*



**HAND SOCKET & ACCESSORIES**



# NILE Air Tools

# MERRY Hand Tools

Air Fil-Saw



Air Plate Shear



Air Multi-Purpose Scissor



Air Wire Twister




Air Nipper




Square Air Cutter



### STANDARD BLADES FOR AIR CUTTERS

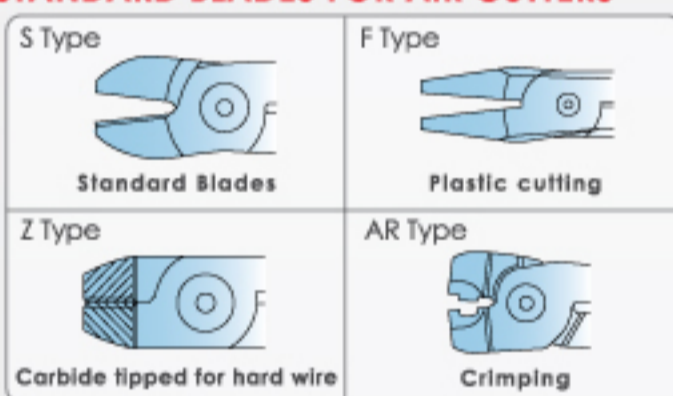

Plastic Gate Cutter

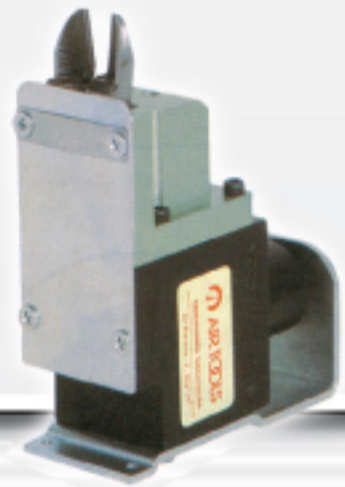

Miniature Nipper



Plastic Cutting Nipper



Palm Grip Plier



End Cutting Nipper



Electronic Nipper



Heavy-duty Plastic Nipper




Heat Nipper



Transformer for heat nipper



# ニュータイプ KURITA Air Dusters

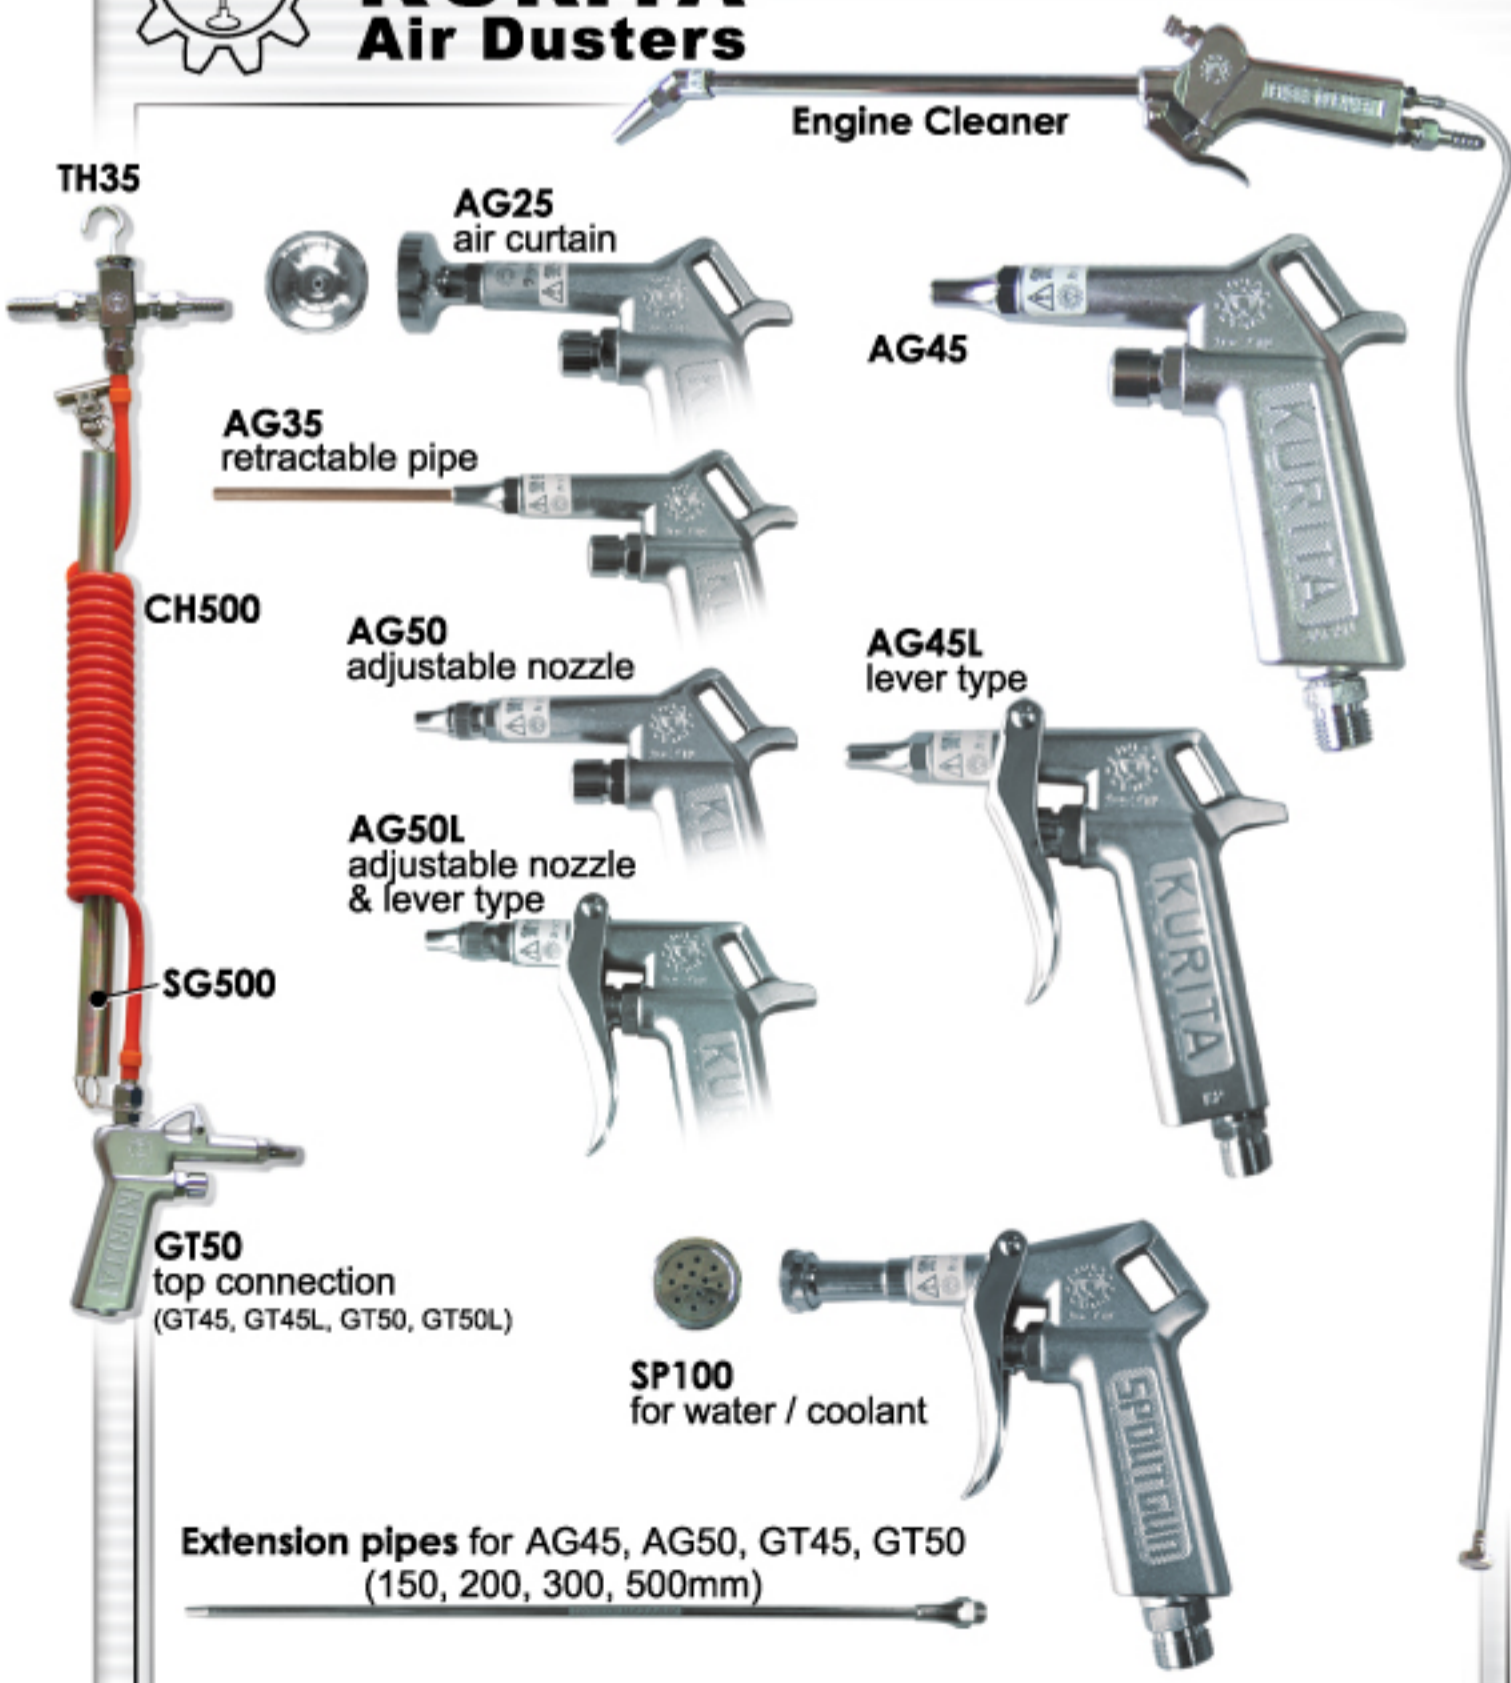

# JSCLAMP HIGH QUALITY TOGGLE CLAMP





**Air Units**



**Pilot & Mechanical Valves**



**Solenoid Valves**



**2 Way Solenoid Valves**



**Standard Cylinders**



**Compact Cylinders**



**Mini Cylinders**




**Stopper Cylinders**



**Grippers Cylinders**



**Guide Cylinders**

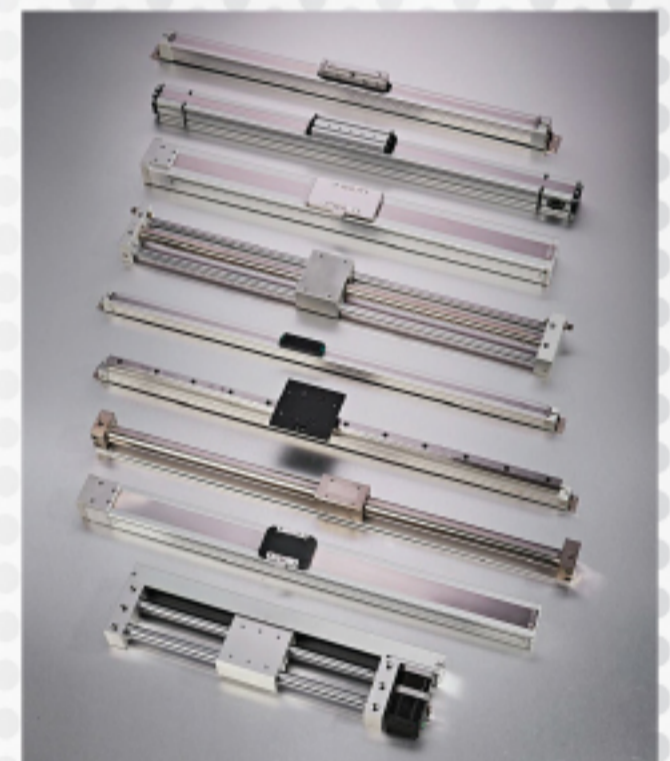

**Rodless Cylinders**



**Hydraulic Cylinders**



**Rotary & Clamp Cylinders**



**PLC**



**Other Auxiliary Equipment**



**實利達有限公司**  
**SRITA SENDIRIAN BERHAD**  
 Reg. No. 49662-V

**HEAD OFFICE** 169, Jalan 27 Kaw. 16, Sg. Rasa, 41300 Klang, Selangor, Malaysia.  
 Tel : 03-3341 3634 Fax : 03-3344 2070 E-mail : sritahq@srita.com Website : www.srita.com.my

**PENANG OFFICE** 5, Jalan Limbungan Indah, Taman Limbungan Indah, 12100 Butterworth, Pulau Penang.  
 Tel : 04-333 3634 Fax : 04-331 3634 E-mail : salespg@srita.com

**JOHOR OFFICE** 112, Jalan Ros Merah 2/16, 81100 Johor Jaya, Johor.  
 Tel : 07-357 9566 Fax : 07-358 4641 E-mail : salesjb@srita.com

**MELAKA OFFICE** 41, Jalan MP3, Taman Merdeka Permai, Batu Berendam, 75350 Melaka.  
 Tel : 06-336 3634 Fax : 06-336 3355 E-mail : salesmk@srita.com