


# Reolink Go

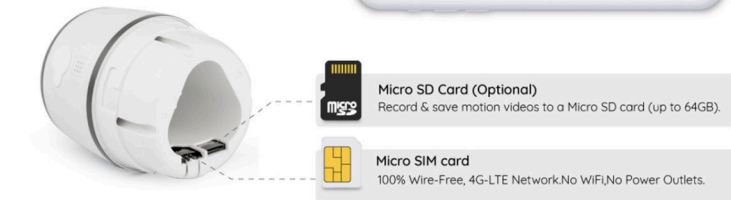

## Camera Specification

<b>Video &amp; Audio</b>	Image Sensor	Starlight CMOS Image Sensor
	Video Resolution	1080p HD at 15 frames/sec
	Video Format	H.264
	Field of View	Fixed lens, 110° diagonal
	Night Vision	Up to 10 m (33 ft)
	Digital Zoom	6x digital zoom
	Audio	High-quality speaker and microphone
<b>PIR Detection &amp; Alert</b>	PIR Detecting Distance	Adjustable up to 10 m (33 ft)
	PIR Detecting Angle	120° horizontal
	Audio Alert	Customized voice-recordable alerts
	Other Alert	Instant email alerts and push notification

<b>Video &amp; Audio</b>	<i>Frequency Bands</i>	<p><i>Europe:</i> LTE FDD: B1/B3/B5/B7/B8/B20 WCDMA: B2/B4/B5</p> <p><i>The United States:</i> LTE FDD: B2/B4/B12 WCDMA: B2/B4/B5</p> <p><i>Australia:</i> LTE FDD: B1/B2/B3/B5/B7/B8/B28 WCDMA: B2/B4/B5 WCDMA: B1/B2/B5/B8</p>
	<i>Transmission Data</i>	<p>LTE FDD: Max 10 Mbps (DL), Max 5 Mbps (UL) LTE TDD: Max 8.96 Mbps (DL), Max 3.1 Mbps (UL) HSPA+: Max 42 Mbps (DL), Max 5.76 Mbps (UL) UMTS: Max 384 Kbps (DL), Max 384 Kbps (UL)</p>
	<i>Battery</i>	7800mAH rechargeable battery (battery life varies based on setting, usage & temperature)
<b>Power</b>	<i>Solar</i>	Can be powered by Reolink Solat Panel
	<i>DC Power</i>	Can be powered by 5V/2A power adapter
<b>Storage</b>	<i>Local Storage</i>	Support up to 64GB micro SD card
	<i>Cloud Storage</i>	Support Reolink Cloud
<b>Working Environment</b>	<i>Operating Temperature</i>	-10° to 55° C (14° to 131° F)
	<i>Weather Resistance</i>	IP65 certified weatherproof
<b>Size &amp; Weight</b>	<i>Size</i>	Φ75 x 113 mm (Φ75x4.4x in)
	<i>Weight (Battery Inc.)</i>	380g (13.4 oz)
<b>Warranty</b>	<i>Limited Warranty</i>	2 year limited warranty

