


HP SERIES

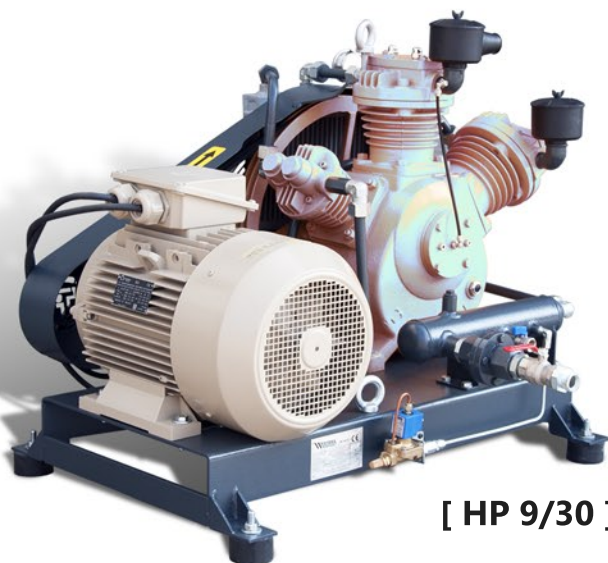

[HP 9/30]

Standard Specifications

- Intercooler
- Non Return Valve
- High Pressure Presostat
- Automatic Drain Selenoid Valve
- Oil Level Gauge
- Powder Paint
- Vibration Rubber Seats
- Inlet and Outlet Gauge
- Thermal Relay for Electrical Motor
- Analog Control Panel
- Star/Delta Electrical Panel

Working Gases


Nitrogen and Other Inert Gases

Optional Specifications

- Electronic Control Panel
- IE4 Motor

Most Used Industries

- Pet Bottling
- Industrial Applications
- Gas Filling Stations
- High Voltage Brake
- Test Equipments

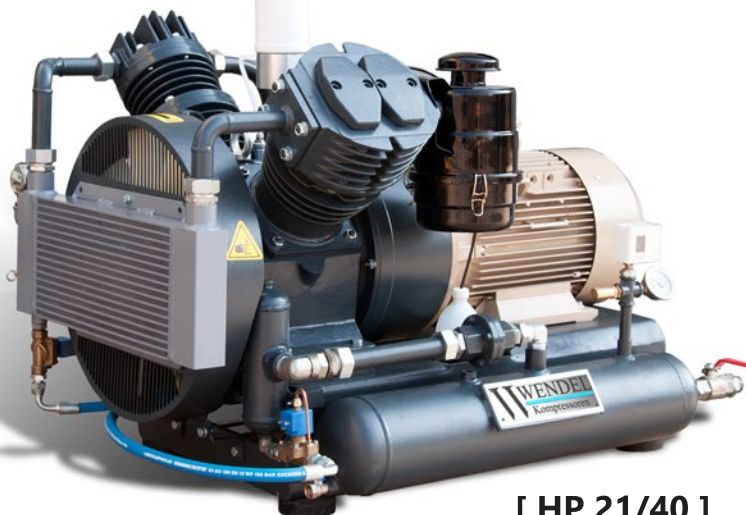

[HP 21/40]
[HP 24/40]

Model	CAPACITY lt/min (net)			Discharge Pressure		Motor Power		RPM	Stage	Cylinder	Coupling	Weight	Dimensions		
	Bar	Bar	Bar	Bar	psi	Kw	Hp	1/min				Kg	Witdh	Length	Height
	10	30	40												
HP 9/30	800	600	-	30	435	11	15	800	2	3	Belt drive	390	880	1040	810
HP 21/40	1900	1600	1550	40	580	15	20	1500	2	2	Direct Drive	460	750	1280	1000
HP 24/40	2100	1800	1680	35	508	18,5	25	1500	2	2	Direct Drive	485	750	1280	1000