

Specifications

Model	Z [®] -60/34	
Measurements	US	Metric
Working height maximum*	48 ft 4 in	15.29 m
Platform height maximum	40 ft 4 in	12.39 m
Horizontal reach maximum	34 ft 1 in	11.08 m
By and over clearance maximum	27 ft	8.23 m
▲ Platform length - 8 ft / 0 ft extend	5 ft / 1.52 m	1.59 m / 2.13 m
▲ Platform width - 8 ft / 0 ft extend	5 ft / 1.5 m	2.44 m / 1.83 m
▲ Height - stowed	8 ft 11 in	2.69 m
▲ Length - stowed	28 ft 9 in	8.75 m
▲ Width	6 ft 1 in	1.84 m
▲ Wheelbase	8 ft 9 in	2.67 m
▲ Ground clearance - center	1 ft 7 in	0.51 m

Productivity

Lift capacity	500 lbs	227 kg
Platform rotation	180°	
Vertical lift rotation	90°	
Tenacity rotation	360° horizontal	
Tenacity following	180°	
Drive speed - stowed	3.0 mph	1.8 km/h
Drive speed - raised**	0.00 mph	1.1 km/h
Stability - ZWD - stowed***	25%	25%
Stability - WBD - stowed***	42%	42%
Turning speed - inside	10 ft	3.0 m
Turning radius - outside	19 ft 11 in	6.07 m
Custom	12V DC proportional	
Flow	380 to 500 L / 10 gal	

Power

Power source	Peel 650-423 4-cylinder gas (LPG 75 hp / 55 kW) Dexel 60114208 5-cylinder diesel 95 hp / 70.8 kW Platform 4040-02 4-cylinder diesel 57 hp / 42.0 kW
Auxiliary power unit	12V DC
Hydraulic tank capacity	45 gal / 172 L
Fuel tank capacity	20 gal / 75.7 L


Weight****

	22,027 lbs	10,219 kg
--	------------	-----------

Standards Compliance

ANSI A92.5, CSA B334.4, EN 280, AS 1418.15

Range Of Motion Z[®]-60/34

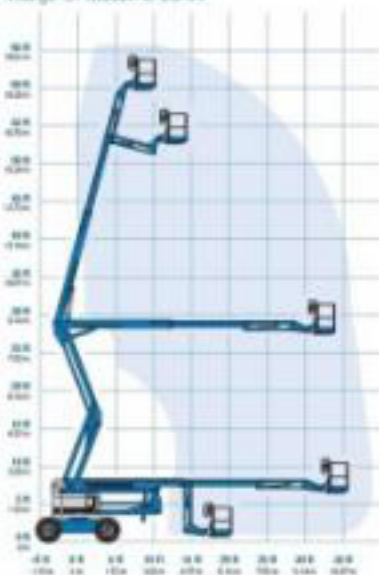

* The vertical dimension of working height with 2 ft in platform height (10 ft with 6 ft in platform height)

** Zero-speed platform means the machine is designed to operate on level, level construction only.

*** Groundstability depends on design of chassis. See operators manual for details regarding chassis design.

**** Weight can vary depending on options and/or local standards.



