


# Self-Propelled Scissor Lifts

## GS™-3384 RT

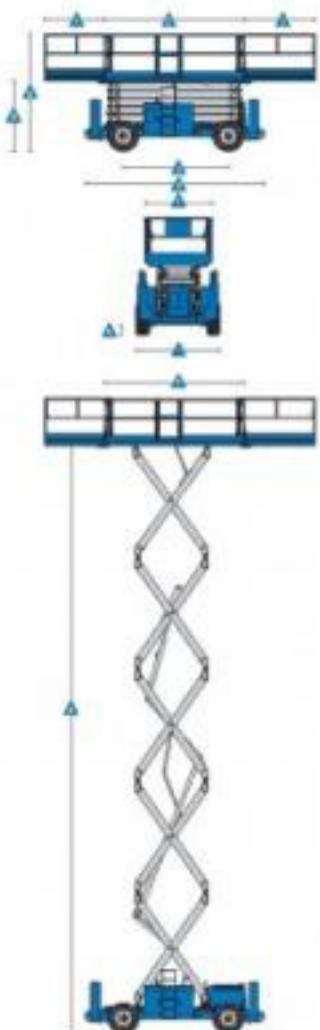

### Specifications

Model	GS-3384 RT	
Measurements	(ft)	Metric
Working height - maximum*	33 ft	12.08 m
Platform height - maximum	33 ft	12.08 m
Platform height - maximum**	33 ft 8 in	10.25 m
Platform height	13 ft 2 in	3.98 m
Width, extended - single deck	17 ft 0 in/20 ft	5.20 m/6.10 m
Width, extended - dual deck	21 ft 0 in/24 ft	6.40 m/7.30 m
Side-cut platform - extension deck - front	9 ft	2.74 m
Side-cut platform - extension deck - rear	4 ft	1.22 m
Platform width - extended	4 ft	1.22 m
Height - stowed/blocked platform	8 ft 3 1/2 in	2.53 m
Deck travelled	0 ft 0 1/2 in	0.00 m
Ledges - stowed angle back	12 ft 11 1/2 in	3.90 m
With outriggers	13 ft 5 1/2 in	4.08 m
Width - maximum front	7 ft	2.13 m
High Clearance Test	7 ft 11 1/2 in	2.41 m
Width overall	9 ft 2 1/2 in	2.80 m
Width overall - center	13 ft	3.96 m

### Productivity

Maximum platform occupancy	2	3
Lift capacity	2,000 lbs	1,134 kg
Lift capacity - extension deck	900 lbs	407 kg
Drive speed - stowed	4.2 mph	6.7 km/h
Drive speed - raised	0.7 mph	1.1 km/h
Availability - raised***	90%	
Maximum outrigger leveling front-to-back	10°	
Side-to-side	12°	
Turning radius - stowed	10 ft 1 1/2 in	3.08 m
Turning radius - service	10 ft 6 in	3.18 m
Groundclearance	9 ft 2 1/2 in	
Capacity	proportional	
Gross	low weight	
Time - pump filter replacement	10 h 31 min	25 x 79 min

### Power

Power source	Ford 354-423 4-cylinder gas/petrol 11 hp (8.2 kW) Sauer 32711123.2 cylinder diesel 10 hp (7.4 kW) air cooled	
Auxiliary power unit	112 ft-lb	
Fuel tank capacity	30 gal	113.4 L
Hydraulic system capacity	30 gal	113.4 L

### Weight\*\*\*

	12,000 lbs	5,441 kg
With outriggers	15,000 lbs	6,800 kg

Standards Compliance: ANSI A92.6, CSA B35H.2, CE, Conformity, II, III, IV, V, VI

\* The maximum recommended working height (maximum) is the platform height + 6 ft, added to platform height.

\*\* Maximum height is the platform height + 4 ft, added to platform height.

\*\*\* Availability based on driving conditions. See operator's manual for details regarding usage criteria.

Weight not yet depending on location-specific country standards.



# Self-Propelled Scissor Lifts

## GS™-3384 RT

### Features

#### Standard Features

##### Measurements

- 30 ft [9.08 m] working height
- Up to 2,000 lbs (914 kg) lift capacity

##### Productivity

- 130 x 72 in [3.30 x 1.83 m] base frame platform
- 60 in [1.52 m] extension deck
- Reversible aluminum deck
- Fingertip controls
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full height swing gate
- Two self-closing gates
- AWD
- Positive traction control
- Four-wheel steering
- Side-cut steering tray
- Fully-filled rough terrain tire (eco tire)
- Tilt level sensor with audio alarm
- Downtime alarm
- Power
- Hour meter

##### Power

- Diesel: 40 hp (30 kW)

#### Options & Accessories

##### Productivity Options

- Dual side-cut platform extension deck package: 5 ft [1.52 m] front and 4 ft [1.22 m] rear
- Automatic leveling hydraulic outriggers
- Anti-tear-in platform
- Four-wheel non-marking rough terrain tires: 40 x 28 x 22 x 72 cm
- High rotation air load tires: 17 x 23 in [43 x 58 cm]
- High rotation heavy-duty tires: 16 x 30 in [41 x 76 cm]
- Dual steering options
- Motion alarm
- Biodegradable hydraulic oil

##### Power Options

- Ford gasoline 75 hp (56 kW)
- Diesel: 40 hp (30 kW)
- AC: 2000 Watt generator (120 V / 60 Hz)
- Cold weather package
- Hydraulic oil cooler
- Diesel catalytic converter muffler
- LPG: steel tank only, 33.5 cu capacity
- Winter AWD: 275 heavy-duty (includes hydraulic oil cooler)
- Winter ready package (includes hydraulic oil cooler)



#### Genie United States:

10540 Hwy 70 West  
PO Box 377081  
Memphis, Tennessee 38184-0001  
Telephone: +1 800-588-1800  
Fax: +1 901-678-1800  
Email: +1 901-678-1800

#### Genie Europe:

77a Ardingly  
Ardingly Road  
Gatwick RH9 8HN  
UK  
Telephone: +44 1293 884220  
Fax: +44 1293 884220  
Email: [info@EuropeGenie.com](mailto:info@EuropeGenie.com)

#### Distributed By:

Genie is a registered trademark of Genie Industries Inc. and is used by other companies under license. The listing above vendor information in this document are 3rd party distributor contacts. Refer to the equipment data sheet in the Genie RT product catalog for the latest distributor contact information. Distributor contact information may change without notice. All trademarks and service marks are the property of their respective owners. All rights reserved. Genie is a registered trademark of Genie Industries Inc. All other products and services are trademarks of their respective manufacturers.