


WAFER CHECK VALVE - DOUBLE DOOR FULL LINER

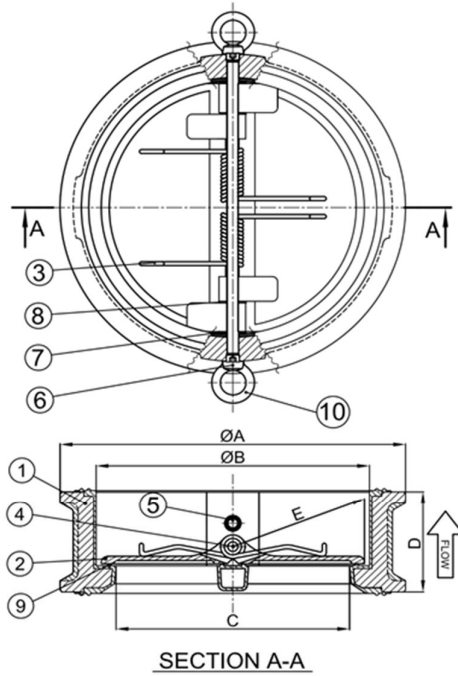

PART NAME & MATERIAL

PART NO	PART NAME	MATERIAL	DESCRIPTION	
			JIS	ASTM
1	Body	Cast Iron	FC200	A126 Class B
2	Plate	Stainless Steel	SCS13	CF8
3	Spring	Stainless Steel	SS 316	
4	Hinge Pin	Stainless Steel	SUS 304	SS 304
5	Stop Pin	Stainless Steel	SUS 304	SS 304
6	Retainer	Alloy Steel	S25C	A105
7	Body Bearing	Teflon	PTFE	
8	Plate Bearing	Teflon	PTFE	
9	Seat	Rubber	NBR / EPDM / VITON	
10	Eye Bolt	Alloy Steel	S25C	A105

DIMENSIONS

SPEC		ØA	ØB	C	D	E
IN	MM					
1½"	40	-	72.0	45.0	54.0	32.0
2"	50	101.0	72.0	45.0	54.0	32.0
2½"	65	121.0	80.0	50.0	54.0	35.0
3"	80	131.0	91.0	67.0	57.0	43.0
4"	100	156.0	119.0	90.0	64.0	53.0
5"	125	187.0	141.0	112.0	70.0	65.0
6"	150	217.0	171.0	137.0	76.0	80.0
8"	200	267.0	226.0	188.0	95.0	108.0
10"	250	330.0	281.0	240.0	108.0	132.0
12"	300	375.0	327.0	282.0	143.0	154.0
14"	350	420.0	362.0	310.0	184.0	169.0
16"	400	483.0	420.0	360.0	191.0	200.0
18"	450	538.0	462.0	406.0	203.0	218.0
20"	500	592.0	512.0	441.0	213.0	243.0
24"	600	697.0	612.0	534.0	222.0	290.0

TEST STANDARD		ISO-5208 / ISO - 7005 -1			
TEST PRESSURE		SHELL		SEAT	
HYDROSTATIC		24.0	KG/CM ²	17.6	KG/CM ²
PNEUMANTIC PRESSURE	-		KG/CM ²	6.0	KG/CM ²
FACE TO FACE		EN 558 -1/50			