




AUTOMATED SYSTEM FOR SWING AND FOLDING GATE

- Can open either left, right or both panel
- Automatic dual speed adjustment
- Smooth & silent gate operation
- 24 hour backup power
- Manual operation
- 24vdc Heavy duty

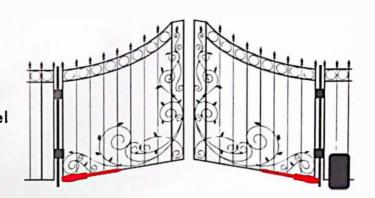

TECHINICAL SPECIFICATION

| Supply Power | : AC 220V, 60Hz/50Hz |
|---------------------------|---|
| Operating Voltage | : DC 24V for Normal Speed |
| | DC12 for Cushioning Speed |
| Max,Lenght of Gate | : 3.5 Meter per Wing |
| Safety Cluth | : Electronic Current Sensing |
| Electronic Controller | : Micro- Processor Base_ d |
| Position Limit Device | : Electronic Fuzzy Logic |
| Driving Method | : Electro - Mechanical screw drive piston typ.e |
| Back-up Battery | : 12 volt 7AH Rechargeable |
| Max. Gate Weight | : 350kg per Wing with Force Adjustable |
| Motor Power Supply | : 12 - 24V |
| Travel Time 90 (sec) | : 10 - 15sec |
| Working Temperature (C) | : 10°C to 50°C |

: 2.9 KG



Weight (KG)

Battery Backup Systems




12 Months Warranty



Pro-Service



Best Choic

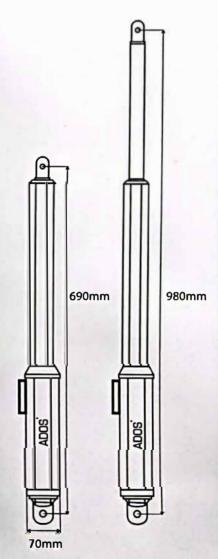

For Enquiries, Please Contact:

