




Ematic Sliding Type Autogate OS
Solid Firm Choice



Item	Sliding Gate Specification
Power Supply	AC 220-240 V 50HZ, Single phase
Motor Power Supply	24 VDC
Motor Speed	2800 Rpm max
Ambient Operating Temperature	-20°C to 120°C
Accessory Power Supply	12VDC / 24VDC
Power Consumption	80 watts
Maximum Sliding Gate Weight	600kg
Sliding Gate Speed	12 meter/s
Safety Clutch	auto-reverse electronic counter technology
Protection Class	IP55
Manual Option	release key during power failure

HIT, STOP AND REVERSE

The gate will stop and reverse if it hits obstacle.

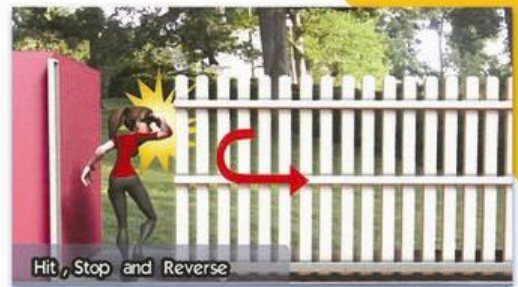

Accessories



Autogate Panel AE165 / AE600
Multi-featured auto gate panel



Battery
A backup battery for operating even in electric breakdown



Plastic Panel Box
A Box that store the Accessories exclude Mtech Build In



Gear Rack
Thick Metal Gear Rack



Remote Controls Rc106
Distant radio frequency device for gate controlling



Transformer
Device that step down the main power AC to the voltage required.

Optional



Strobe Light



Keypad
A Multi-features keypad to monitor the gate status



Metal Gear
Tougher gear to resist wear and tear.



Keyswitch
Lock and Closer for release keyhole



Safety Beam
Infrared sensor to detect obstacle