


**Specifications**

	Model No.		
	MDF-1156-PB / MDF-1156ATN-PB	MDF-794-PB	MDF-594-PB / MDF-594AT-PB
220 V, 50 Hz	MDF-1156-PK / MDF-1156ATN-PK	MDF-794-PK / MDF-794AT-PK	MDF-594-PK
220 V, 60 Hz	MDF-1156-PE / MDF-1156ATN-PE	MDF-794-PE / MDF-794AT-PE	MDF-594-PE / MDF-594AT-PE
230 V/240 V, 50 Hz (CE)			
Temperature Range	-130°C to -152°C	-20°C to -86°C	
External Dimensions (W x D x H)*1	1400 x 800 x 945 (mm) 55.1 x 31.5 x 37.2 (inch)	2570 x 770 x 1070 (mm) 101.2 x 30.3 x 42.1 (inch)	2010 x 770 x 1070 (mm) 79.1 x 30.3 x 42.1 (inch)
Internal Dimensions (W x D x H)	500 x 450 x 572 (mm) 19.7 x 17.7 x 22.5 (inch)	1840 x 500 x 762 (mm) 72.4 x 19.7 x 30.0 (inch)	1,280 x 500 x 762 (mm) 50.4 x 19.7 x 30.0 (inch)
Effective Capacity	128 liters (4.5 cu.ft.)	701 liters (24.8 cu.ft.)	487 liters (17.2 cu.ft.)
Exterior Cabinet	Galvanised steel with baked on finish		
Interior Cabinet	Aluminum plate	Stainless steel	
Inner Lid	1	4	3
Insulation	Foamed-in-place rigid polyurethane		
Compressor	High stage side	Hermetic type, 1,100 W	
	Low stage side	Hermetic type, 1,100 W	
Evaporator	High stage side	Cascade condenser	
	Low stage side	Tube on sheet (shared with interior)	
Condenser	High stage side	Fin and tube type	
	Low stage side	Shell and tube type	Cascade condenser
Temperature Control	Microprocessor control system, Non-volatile memory	Microprocessor: Keypad input Set value memory: non-volatile memory	
Temperature Display	Digital display		
Sensor	Platinum resistance (Pt. 100 Ω)		
Safety	Cylinder key on the lid handle		
Alarm system	Selectable high temp. alarm (+10°C & +15°C from set point)		
	Power failure alarm, Filter check lamp, Remote alarm contact		
Net Weight (Approx.)	265 kg (584 lbs.) —1156 272 kg (600 lbs.) —1156ATN	335 kg (739 lbs.) —794 345 kg (761 lbs.) —794AT	291 kg (642 lbs.) —594 301 kg (664 lbs.) —594AT

ATN: LN<sub>2</sub> backup system, temperature recorder AT: LCO<sub>2</sub> backup system, temperature recorder  
 \*1 External dimensions of main cabinet only - see dimension drawings showing handles and other external projections.

**Dimensions**

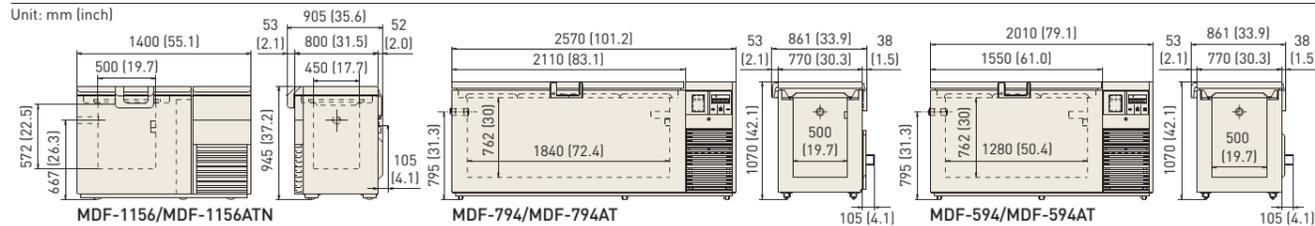

**Optional Accessories**

**Storage Racks (Aluminium)**

Model No.	MDF-49SC-PW	MDF-59SC-PW
Case Dimensions (W x D x H)	207 x 144 x 539 (mm) 8.1 x 5.7 x 21.2 (inch)	207 x 144 x 665 (mm) 8.1 x 5.7 x 26.2 (inch)
Number of Drawers	4	5
Applicable Model (Rack capacity)	MDF-1156/1156ATN (6)	MDF-594/594AT (18) MDF-794/794AT (24)



**Temperature Recorder**

Model No.	MTR-85H-PW	MTR-155H-PW
Recording Range	-100 to +50°C	-170 to +30°C
Freezer Model	MDF-594 MDF-794	MDF-1156

**ULT-Freezer Backup Kits**



**Inventory Racks (Stainless steel)**

Model No.	Box Type (Capacity)	External Dimensions (mm)			Freezer Model (Rack capacity)
		Width	Depth	Height	
IR-209C-PW	2" (9)	144	142	518	MDF-1156 (9)
IR-213C-PW	2" (13)	144	142	592	MDF-794 (36)
IR-306C-PW	3" (6)	144	142	518	MDF-1156 (9)
IR-309C-PW	3" (9)	144	142	747	MDF-594 (24), 794 (36)



\*Cooling performance is indicated by the temperature reached at the center of the freezer (at ambient temperature of 30°C with no load). In order to use the freezer at a stable temperature for a long time, it is recommended that the temperature be set to at least 5°C higher than the indicated lowest temperature. In addition, depending on the usage conditions, it may not be possible to reach the indicated lowest temperature.

Caution: PHC Corporation guarantees the product under certain warranty conditions. PHC Corporation is in no way shall be responsible for any loss of content or damage to content.  
 • Appearance and specifications are subject to change without notice.

**TUV SUD** Preservation (freezers, refrigerators) and Culturing (incubators) Equipment  
 The management of the design, development, production, sales support, and servicing of the above.  
 PHC Corporation, Biomedical Division  
 1-1-1 Sakada, Oizumi-machi, Ora-gun, Gunma 370-0596, Japan

**MS JAB CM021**  
**ISO 14001 JAC**  
**UKAS MANAGEMENT SYSTEMS 051**

PHC Corporation, Biomedical Division is certified for:  
**Environmental management system: ISO14001**

DISTRIBUTED BY:



<https://www.phcd.com/global/biomedical/>  
 Printed in Japan 1001-2018-04-CC



**Cryogenic Freezers  
 Ultra-Low Temperature Freezers**



**PHCbi Cryogenic Freezers and Ultra-Low Temperature Freezers support the forefront of life science research.**



**PHC Corporation, Biomedical Division**

**Life Science  
 Innovator  
 Since 1966**

# The Ideal $-152^{\circ}\text{C}$ , $-86^{\circ}\text{C}$ Freezing Environment in Capacities from 128 L to 701 L

Ideal for long term preservation of biologicals and various cell line, PHCbi preservation systems employ microprocessor control to maintain a high-precision temperature environment. They are not affected by ambient temperature, minimizing uneven temperature distribution within the chamber, and a temperature rise during door opening.


## $-152^{\circ}\text{C}$ Cryogenic Freezers

For stable long-term storage  
**MDF-1156**  
**MDF-1156ATN**




MDF-1156

### Performance Data

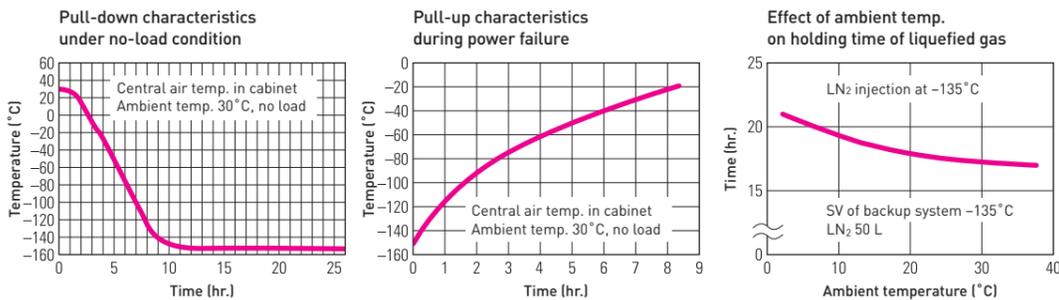

Temperature  **$-152^{\circ}\text{C}$**   
Effective Capacity **128 L**  
(4.5 cu.ft.)

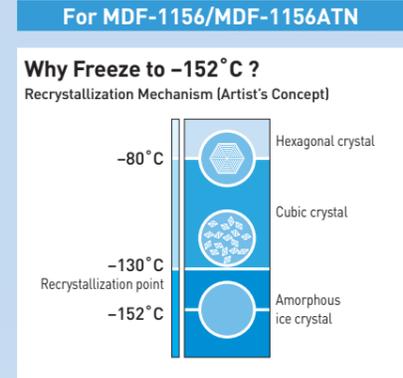

### $-152^{\circ}\text{C}$ freezer ensures stable cell and tissue preservation

An important factor to consider when preserving cells or tissue at ultra-low temperatures is to prevent amorphous ice crystals from recrystallizing within and outside the cells. Samples that are maintained in a cryogenic freezer at  $-152^{\circ}\text{C}$  which is far lower than the recrystallization point ( $-130^{\circ}\text{C}$  for pure water) can be preserved semi-permanently. Preservation at ultra-low temperatures maintains vitrification without crystallization occurring inside and outside cells. In contrast to conventional liquid nitrogen preservation containers, freezer preservation has numerous advantages: no sample contamination, no sudden liquid eruptions, as well as low operational costs. PHCbi's MDF-1156 and MDF-1156ATN make long-term storage below the recrystallization point easier and more stable than ever before.

### Advanced Features

**Specially designed compressor and cascade refrigeration system**  
Specially designed for rugged ultra-low temperature applications in a laboratory environment (HFC refrigerants only).

**Self-diagnostic function**  
The temperature sensor, filter sensor and cascade sensor monitor operation conditions continuously. Should abnormality be picked up, an error code and the current temperature will be displayed in turn.

**Ring back function**  
The alarm buzzer can be silenced by pressing the BUZZER key on the control panel. (The remote alarm signal is not cancelled.) Should the alarm condition continue after a certain suspension, the alarm buzzer sound will resume.

**Easy Maintenance**  
Filter check lamp notifies the user of a clogged condenser filter. The condenser filter is situated at the front panel to make filter removing and cleaning easier.

**Note:** The position of the filter check lamp is shown on the control panel (see photo shown at the bottom of this page).

**Micro-processor Temperature Control with LED Digital Display**  
Extremely accurate, easy-to-read display. The temperature inside the freezer can be set and monitored easily by means of a microprocessor temperature control with an LED digital display. The thermostat incorporates a platinum resistor (Pt. 100Ω), precision and durability.

**Integrated Cabinet Design**  
High-performance refrigeration system with foamed-in-place cabinet insulation maximizes interior temperature uniformity and protects against fluctuating ambient temperatures.

**Hot line for secure sealing**  
Moisture condensation at the top edges of the cabinet due to differences in temperature inside and out causes frost and icing problems that may reduce heat insulation efficiency and obstruct door movements. These problems are prevented by the "hot line" by means of which hot gas from the higher temperature circuit is circulated through the problem areas.

**Standard casters and levelling feet**  
Standard-equipped heavy duty casters make it easy to move a freezer when necessary. The levelling feet keep a freezer level and firm on the floor.

### Safety Device

**Built-In Temperature & Power Failure Alarms (Lamp/Buzzer)**  
In case of power failure or an irregular rise in temperature, a rechargeable battery-operated indicator lamp and alarm will be activated. A compact recording unit which automatically records the inside temperature, and a backup system with liquefied CO<sub>2</sub> or N<sub>2</sub> which is self-activated when a power outage occurs are also available separately (comes standard with the AT series). This equipment helps insure that the contents will be protected in the event of any power failure or mechanical trouble.


## $-86^{\circ}\text{C}$ Ultra-Low Temperature Freezers

Ideal for middle-sized installation space  
**MDF-594**  
**MDF-594AT**



MDF-594AT

### Performance Data

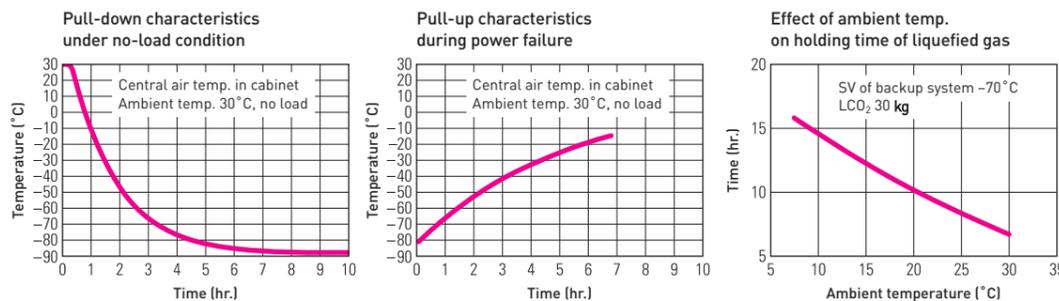


Temperature  **$-86^{\circ}\text{C}$**   
Effective Capacity **487 L**  
(17.2 cu.ft.)

Ideal for large-capacity preservation  
**MDF-794**  
**MDF-794AT**



MDF-794AT

### Performance Data

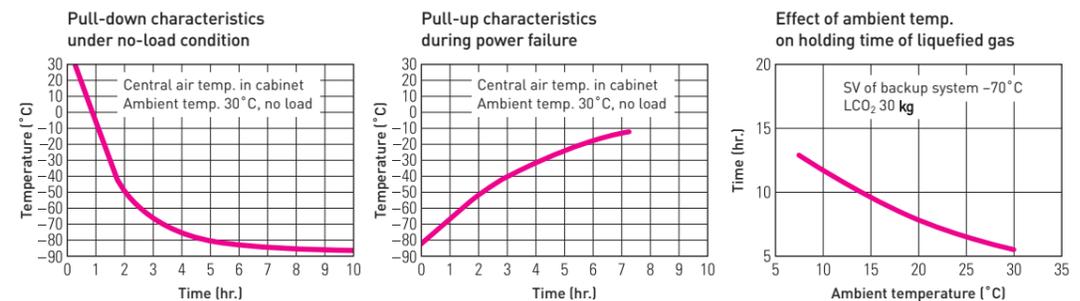

Temperature  **$-86^{\circ}\text{C}$**   
Effective Capacity **701 L**  
(24.8 cu.ft.)