

HITACHI

Air like never before

RAS-EJ10CKM/ EJ13CKM



RAS-EJ18CKM/ EJ24CKM



Cooling & Heating

Mini Split

Wall mounted air conditioning

Fuzzy logic control

The built-in microcomputer measures and records room size together with previous and current conditions and sets the advanced activation timer to provide optimum temperature.

Full metal fire proof electrical enclosure

Electrical parts of indoor and outdoor units are tightly enclosed in a 100% metal box to ensure there is virtually no possibility of fire spreading.



3 minute delay circuit (fuse blow prevention)

Ensures there is no danger of the fuse blowing or damage to parts if operation is restarted accidentally.



Anti-corrosion coating for outdoor units

The condensers in our outdoor units are protected by a special anti-corrosion coating that lasts longer than standard coatings. This extra layer of protection ensures better performance, durability and savings year after year, even in coastal conditions.

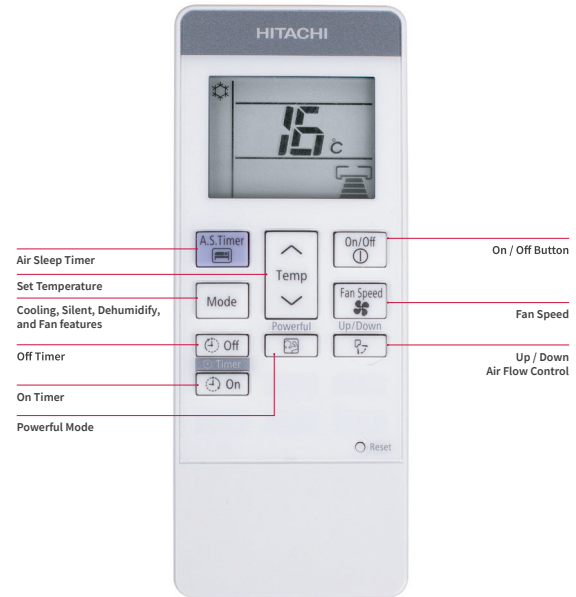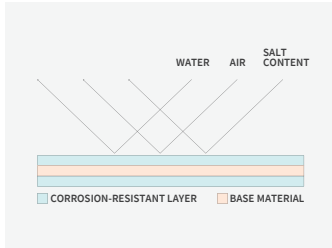

The actual product may differ in appearance

Model	Indoor	RAS-EJ10CKM	RAS-EJ13CKM	RAS-EJ18CKM	RAS-EJ24CKM	
	Outdoor	RAC-EJ10CKM	RAC-EJ13CKM	RAC-EJ18CKM	RAC-EJ24CKM	
Power Supply	Current	1 Phase				
	Phase, Frequency, Voltage	1φ, 50Hz, 220-230V				
	Source	Indoor				
Cooling Capacity	kW	2.65	3.50	5.20	6.30	
	BTU/h	9,040	11,940	17,740	21,490	
CSPF	Wh/Wh	3.32	3.38	3.26	3.55	
EER	BTU/h*W	10.96	10.85	10.44	11.02	
Total Input	W	825	1,100	1,700	1,950	
Total Amperes	A	3.94 - 3.77	5.05 - 4.83	8.13 - 7.78	9.33 - 8.92	
Air Flow	Powerful/H/M/L/Silent	m ³ /min	10.5/9.5/7.5/6.0/4.5	12.0/11.5/9.0/7.5/6.2	18.0/16.5/12.5/10.5/7.5	18.0/17.0/13.5/11.5/8.0
Sound Level	Powerful/H/M/L/Silent	dB(A)	46/39/34/28/25	48/43/37/31/29	50/45/38/35/29	50/48/41/36/30
Dehumidifying Capacity	L/h	1.4	1.8	3.5	3.5	
Maximum Length / Height of Piping	m	15/10	15/10	20/10	20/10	
Diameter for Liquid / Gas	mm	6.35/9.52	6.35/9.52	6.35/12.7	6.35/15.88	
Net Dimensions	Indoor (W*H*D)	mm	780 x 280 x 230	780 x 280 x 230	1100x 300 x 260	1100x 300 x 260
	Outdoor (W*H*D)	mm	658 x 530 x 275	658 x 530 x 275	750 x 570 x 280	850 x 650 x 298
Net Weight	Indoor/Outdoor	kg	8.0/23.0	8.0/26.0	14.0/37.0	14.0/47.5
Refrigerant			R32			

Johnson Controls Hitachi Air Conditioning Sales Malaysia Sdn Bhd

CUSTOMER SERVICE

Luxor Tech. Centre, Level 2, No. 1A, Jalan Teknologi ¾, Taman Sains Selangor 1, Kota Damansara PJU 5, 47810 Petaling Jaya, Selangor Darul Ehsan, Malaysia.
Tel: +603 7628 4100
Fax: +603 7628 4101
Customer hotline: 1-800-88-9675
Website: www.hitachiaircon.my



The specifications of this document may change without prior notice to allow Hitachi Cooling & Heating to incorporate the latest innovations for its customers. The information contained in this document is merely informative. Hitachi Cooling & Heating declines any responsibility in the broadest sense, for damage, direct or indirect, arising from the use and / or interpretation of the recommendations in this document.

