




BINA PLASTIC
INDUSTRIES SDN BHD
(Co.No. 54840-T)

HDPE CORRUGATED SUBSOIL DRAINAGE PIPE

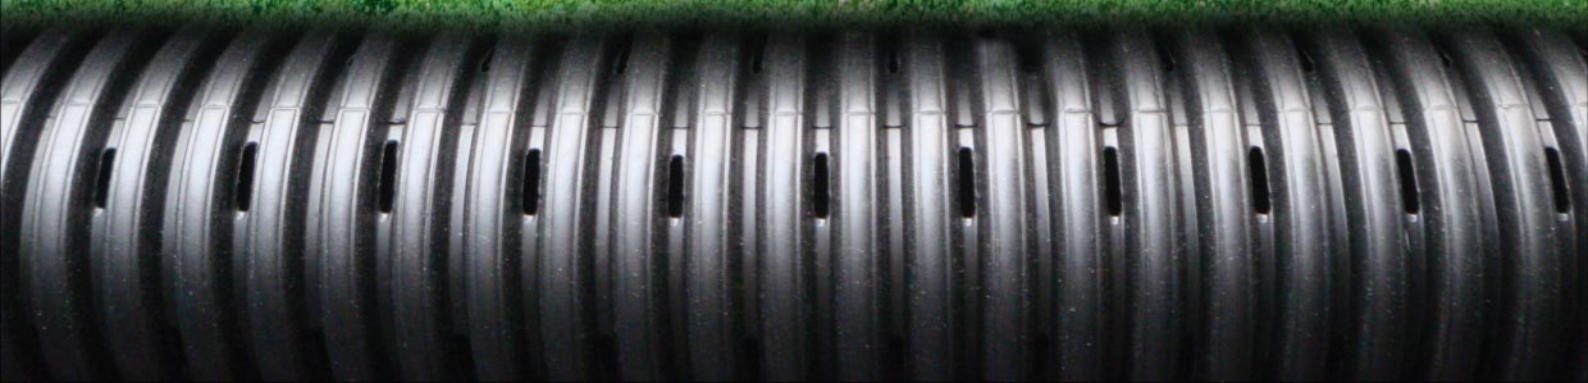

HDPE CORRUGATED SUBSOIL DRAINAGE PIPE


ADVANTAGES

- ◆ Light weight
- ◆ High structural strength
- ◆ Long lengths
- ◆ Easy to install
- ◆ Flexible
- ◆ Chemically inert
- ◆ Abrasion resistance
- ◆ Cost effective

APPLICATIONS


- ◆ Golf course
- ◆ Sports field
- ◆ Parks
- ◆ Landscaping
- ◆ Agriculture
- ◆ Retaining walls
- ◆ Highways and roads
- ◆ Sludge drying beds

PRODUCT DATA

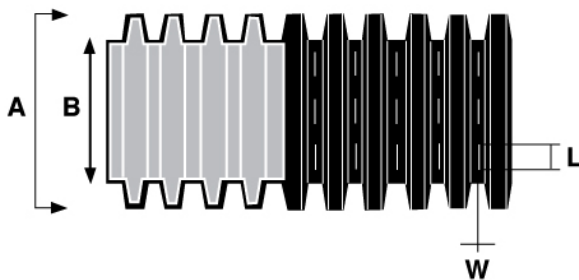

Nominal Diameter (mm)	Outside Diameter (mm), A	Inside Diameter (mm), B	Perforation Size (mm) W x L	Slot Area (mm ² /m)	Coil Length (m)
100	119	100	1.5 x 20.0	6,480	50
150	175	150	1.5 x 30.0	7,020	30

TYPICAL TRENCH

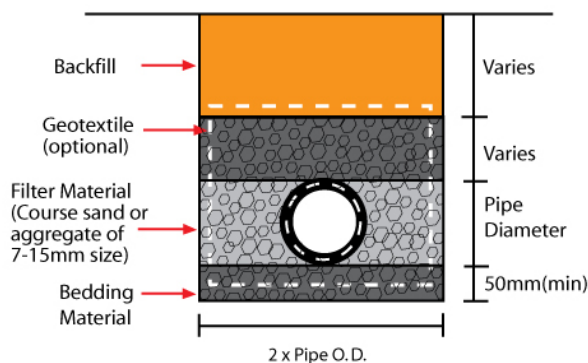

Rough Guide for Drain Spacing and Depth

Soil Type	Drain Spacing (m)	Depth (m)
Sand	15.0 - 23.0	0.9 - 2.0
Loam	9.0 - 15.0	0.9 - 1.2
Clay	2.5 - 7.0	0.6 - 1.0

The information is offered as guide only. The company cannot accept any responsibility for decisions based on this guide since the actual drain spacing and depth are determined from specific soil permeability tests and survey results.

Disclaimer:

- 1) The brochure is protected by Copyright and may not be copied or reproduced in any form or by any means in whole or in part without prior consent in writing by the company.
- 2) Products specifications, usage data and advisory information may change from time to time with advances in research and field experience. The company reserves the right to make such changes at any time without notice