

## **S406 DIG ORP Electrode**

### **Digital measurement with built-in Temperature sensor**

The sensor **S406 DIG** is used for digital measurement of ORP in pure water, wastewater treatment plants, suspended solids fouling processes, processes with pollutants, processes with high concentrations of sulfides, coagulation and flocculation, scrubbers, galvanic processes, surface finishing, processes of elimination or recovery of heavy metals.

### **Applications**

ORP Measurement in:

- Water and Wastewater Treatment
- Coagulation and Flocculation
- Process Monitoring and Control
- Acid / Caustic Neutralization Plant Effluent

### **Features and benefits**

- Reliable ORP measure thanks to the use of a process of digital measurement
- Communication of measurements via MODBUS RTU protocol
- Possibility to execute all the calibrations via serial port
- Absence of moving mechanical parts
- Immediate installation and easy maintenance

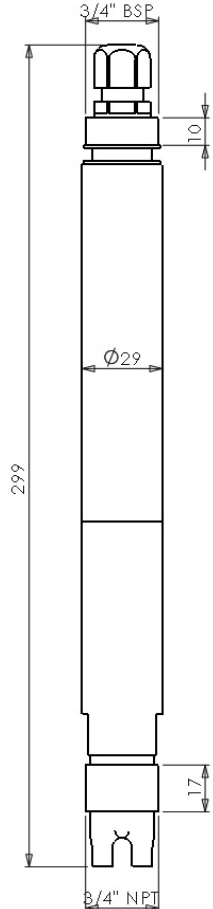
The S406 DIG ORP Electrode is suitable for ORP measures in various applications. The porous Teflon® liquid junction resists fouling and chemical attack. Double junction reference cells increase the service life in applications containing sulfides (H<sub>2</sub>S) and metals such as lead, mercury and silver. The new cast-in-place solid reference electrolyte helps maintain a constant reference cell potential by resisting dilution over time with pressure and temperature changes. The new capillary temperature sensor design places the Pt100 behind the ORP-sensitive membrane for accurate temperature compensation and measurement. The IP68 environmental rating protects the high impedance ORP electrode signal from moisture resulting from condensate build up in submersion pipes.

## Composition of the supply



The supply consists of a single package containing the following parts:

1. 1 S406 DIG Digital ORP Electrode with 10m cable
2. 1 Technical manual for instruction

TECHNICAL DATA	DIMENSIONS
<b>Materials :</b> — Ryton® and PVC body — Viton® O-Rings — Other materials: Teflon®, carbon, epoxy	
<b>Measuring Electrode:</b> Platinum made, anular form	
<b>Thread:</b> 3/4" NPT, 3/4" BSP	
<b>Measuring range:</b> -1500mV ÷ +1500mV	
<b>Measuring method:</b> Digital	
<b>Calibration method:</b> 1-point calibration with certified Redox standard solutions	
<b>Resolution:</b> ±1 mV	
<b>Accuracy:</b> ± 5 mV	
<b>Repeatability:</b> ± 3mV	
<b>Responding time:</b> T <sub>90</sub> <60s	
<b>Temperature sensor:</b> PT100	
<b>Operating Temperature immersion :</b> 0÷50 °C (122°F)	
<b>Operating Temperatura in the pipeline:</b> 0÷80 °C	
<b>Max operating Pressure:</b> 11bar	
<b>Minimum operating conductivity:</b> 50µS	
<b>Maximum absorption:</b> 2W	
<b>Mechanical protection:</b> IP68 Sensor+cable	
<b>Cable length:</b> 10m integrated with the sensor (more on request)	
<b>Power supply:</b> 12...24Vdc	
<b>Communication:</b> RS485 Modbus	
<b>Equipotential contact for the solution:</b> included	
<b>Dimensions (LxHxP):</b> 29x299x29mm	

<b>ELECTRICAL CONNECTIONS</b>	
RED	12-24VDC
BLACK	GROUND
YELLOW	RS485 A+
GREEN	RS485 B-

## **S406 DIFF ORP Electrode for prohibitive apps** **Differential measurement with built-in Temperature sensor**

The sensor S406 Diff is used for differential measurement of ORP in pure water, wastewater treatment plants, suspended solids fouling processes, processes with pollutants, processes with high concentrations of sulfides, coagulation and flocculation, scrubbers, galvanic processes, surface finishing, processes of elimination or recovery of heavy metals.

### **Applications**

- ORP Measurement

### **Features and benefits**

- Reliable ORP measure thanks to the use of a process of digital measurement
- Communication of measurements via MODBUS RTU protocol
- Differential method of measurement enables a longer electrode life in time and in the most prohibitive applications
- Possibility to execute all the calibrations via serial port
- Black PVC sensor body
- Absence of moving mechanical parts
- Immediate installation and easy maintenance

Redox electrodes S406 are designed for measurements of redox in heavy duty applications where ORP electrodes standards would not be able to work because the life of reference would be too short. The sensor of Redox S406 is constituted by a PVC body which houses the glass electrode for measuring the Redox, the reference electrode with a salt bridge, the temperature sensor, the earth contact of the solution and the electronic board of signal handling. These sensors are fully interchangeable with any ORP electrode and are suitable for use with any ORP meter. They are able to communicate the

values of the measure ORP and Temperature via MODBUS protocol RTI, and you can perform all calibrations through the serial port.

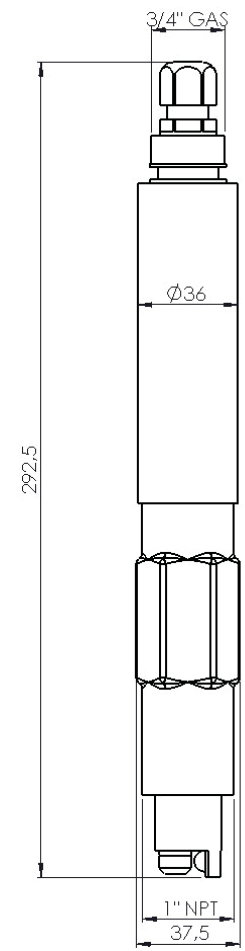
As already said, the S406 Diff uses the proven technique of differential measurement in three electrodes, the ORP and the reference electrode are compared to a ground electrode for a rate measuring accuracy, even in difficult chemical applications. The replaceable bridge and the refillable tank ensure a long life service in applications containing sulphide (H<sub>2</sub>S) and metals such as lead, mercury, and silver. The electrode will maintain a constant potential in the reference cell resisting the dilution and the variations of pressure and temperature over time. The patented reference junction in porous Teflon ® resists fouling and chemical attack. Not surprisingly, examples of applications where differential ORP electrodes are the most suitable choice are: wastewater treatment plants, suspended solids fouling processes, processes with pollutants, processes with high concentrations of sulfides, coagulation and flocculation, scrubbers, galvanic processes, surface finishing, processes of elimination or recovery of heavy metals.

## Composition of the supply



The supply consists of a single package containing the following parts:

1. 1 S406 Diff Differential ORP Electrode with 10m cable
2. 1 Technical manual for instruction

TECHNICAL DATA	DIMENSIONS
<b>Materials :</b> — Ryton® and PVC body — Viton® O-Rings — Other materials: Teflon®, carbon, epoxy	
<b>Measuring Electrode:</b> Platinum made, anular form	
<b>Thread:</b> 1" NPT, 3/4" GAS BSP	
<b>Measuring range:</b> -1500mV ÷ +1500mV	
<b>Measuring Method:</b> Differential	
<b>Calibration method:</b> 1-point calibration with certified RedOx standard solutions	
<b>Resolution:</b> ±1 mV	
<b>Accuracy:</b> ± 5 mV	
<b>Repeatability:</b> ± 3 mV	
<b>Responding time:</b> T <sub>90</sub> <60s	
<b>Temperature sensor:</b> PT100	
<b>Operating Temperature immersion :</b> 0÷50°C (122°F) <b>Operating Temperatura in the pipeline:</b> 0÷80°C	
<b>Max operating Pressure:</b> 6.9bar	
<b>Minimum operating conductivity:</b> 50µS	
<b>Maximum absorption:</b> 2W	
<b>Mechanical protection:</b> IP68 Sensor+cable	
<b>Cable length:</b> 10m integrated with the sensor (more on request)	
<b>Power supply:</b> 12...24Vdc	
<b>Communication:</b> RS485 Modbus	
<b>Equipotential contact for the solution:</b> included	
<b>Dimensions (LxHxP):</b> 37,5x292,5x37,5mm	

ELECTRICAL CONNECTIONS	
RED	12-24VDC
BLACK	GROUND
YELLOW	RS485 A+
GREEN	RS485 B-

## Order codes

9700780097	S406 DIG Elettrodo digitale ORP
9700730097	S406DIFF Elettrodo ORP Differenziale per imp proibitivi cavo 10m