

Vorteile der Anwendung

BOHRER



WERKSTOFF Rubin


BEARBEITUNG ■ Bohren



BOHRER

DRILL

PERCEUSE

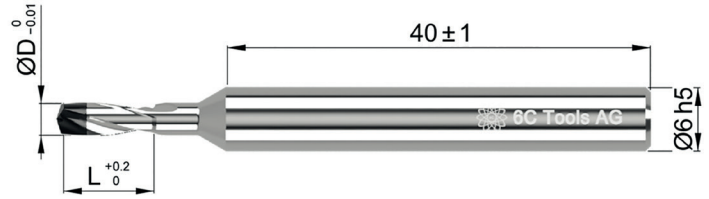

Product code	D	L: 2mm		L: 4mm		L: 8mm		KSM optional
		-2020		-2040		-2080		
		L	Code	L	Code	L	Code	
TD-P-xxxx-050-xxx	0.5	2.0	-020	4.0	-040			■
TD-P-xxxx-060-xxx	0.6	2.0	-020	4.0	-040			■
TD-P-xxxx-070-xxx	0.7	2.0	-020	4.0	-040			■
TD-P-xxxx-080-xxx	0.8	2.0	-020	4.0	-040			■
TD-P-xxxx-090-xxx	0.9	2.0	-020	4.0	-040			■
TD-P-xxxx-100-xxx	1.0	2.0	-020	4.0	-040	8.0	-080	■
TD-P-xxxx-110-xxx	1.1			4.0	-040	8.0	-080	■
TD-P-xxxx-120-xxx	1.2			4.0	-040	8.0	-080	■
TD-P-xxxx-130-xxx	1.3			4.0	-040	8.0	-080	■
TD-P-xxxx-140-xxx	1.4			4.0	-040	8.0	-080	—
TD-P-xxxx-150-xxx	1.5			4.0	-040	8.0	-080	—
TD-P-xxxx-160-xxx	1.6			4.0	-040	8.0	-080	—
TD-P-xxxx-170-xxx	1.7			4.0	-040	8.0	-080	—
TD-P-xxxx-180-xxx	1.8			4.0	-040	8.0	-080	—
TD-P-xxxx-190-xxx	1.9			4.0	-040	8.0	-080	—
TD-P-xxxx-200-xxx	2.0			4.0	-040	8.0	-080	—
TD-P-xxxx-210-xxx	2.1			4.0	-040	8.0	-080	—
TD-P-xxxx-220-xxx	2.2			4.0	-040	8.0	-080	—
TD-P-xxxx-230-xxx	2.3			4.0	-040	8.0	-080	—
TD-P-xxxx-240-xxx	2.4			4.0	-040	8.0	-080	—
TD-P-xxxx-250-xxx	2.5			4.0	-040	8.0	-080	—
TD-P-xxxx-260-xxx	2.6			4.0	-040	8.0	-080	—
TD-P-xxxx-270-xxx	2.7			4.0	-040	8.0	-080	—
TD-P-xxxx-280-xxx	2.8			4.0	-040	8.0	-080	—
TD-P-xxxx-290-xxx	2.9			4.0	-040	8.0	-080	—
TD-P-xxxx-300-xxx	3.0			4.0	-040	8.0	-080	—

Beispiel: Typ L: 2mm D= 2mm L= 2mm
 Bestell-Nr. TD-P -2020 -200 -020