


POLYURETHANE TUBING (PU TUBING)

Flexible • Durable • Industrial Pneumatic Applications

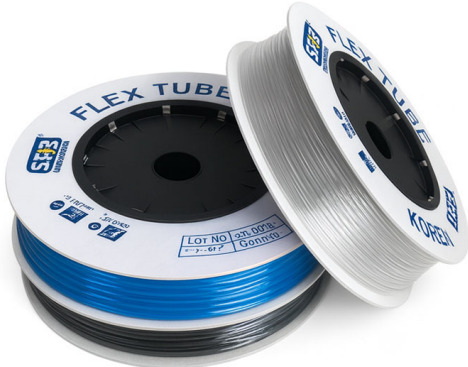

Key Features

- Extremely flexible & excellent memory
- Ultra kink resistant
- High abrasion resistance
- Low gas permeability
- Resistant to chemicals, water, fuel, oil & fungus
- Silicon-free

Technical Specifications

Temperature Range: -20°C to +60°C

Working Pressure: Up to 10 Bar

Available Colours: Transparent, Blue, Black

Available Sizes

Part No.	OD (mm)	ID (mm)	Standard Length
PU0420	4	2	100 m
PU0640	6	4	100 m
PU0850	8	5	100 m
PU1065	10	6.5	100 m
PU1280	12	8	100 m
PU1410	14	10	50 m
PU1612	16	12	50 m

VD Valve
Valves • Actuators • Pneumatics