



KOSSAN

POLYETHYLENE (PE) CYLINDRICAL CLOSED TOP TANKS



APPLICATION

- = Public water supply
- = Housing and condominiums
- = Commercial buildings (complexes, shops, offices)
- = Schools, hospitals, army camps
- = Industrial applications (factories and plants)
- = Plantations, logging camps, farms
- = Aquaculture

PRODUCT FEATURES

- = Strong and durable - seamless and leak-proof one piece construction.
- = Lightweight for easy handling and installation.
- = Hygienic and Food / Potable water compliant.
- = Meets standards of Food and Drug Administration.
- = Maintenance free - no painting required and corrosion.
- = UV resistant.
- = Extensive range available.
- = Approved by Ikram to Malaysia standards MS1225 : Part 2 : 2006.
- = Product Approval Certification from SPAN.
- = Comprehensive technical support.
- = Quality assurance and warranty.

** Printed Date : Oct 2018





HANDLING & INSTALLATION GUIDANCE

1 Handling, Lifting & Hoisting



Lift / Loading in proper manner.




STRICTLY Lifted / unloaded at at lifting lugs provided.

2 Base Support




MUST sit flat / even surface and be uniformly supported at its whole base area.

3 Joints & Connections

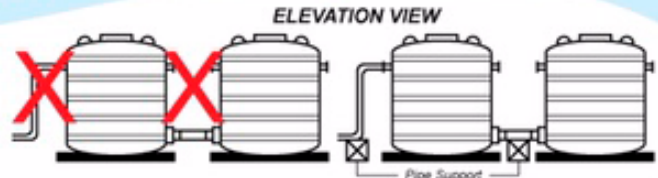

Ensure all pipes connected to the tank are well supported and properly aligned.

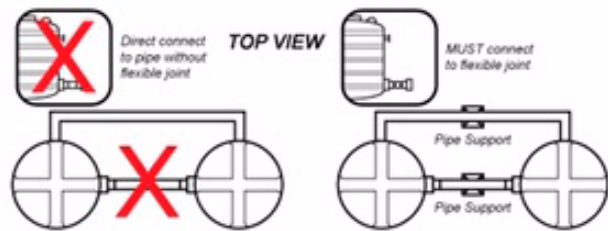

4 Storage



Before installation, check tank thoroughly to ensure it is in good condition, If in doubt refer to manufacturer, dealer or agent.
DO NOT place KOSSAN tank near fire or other source & heat.

PRODUCT RANGE

Model	Capacity (Gallons)		External Dimensions (mm / Inches)	
	Effective		(mm)	(Inches)
N500	500		Diameter 1,500 x 1,510 mm (H)	Diameter 60" x 60" (H)
N600	600		Diameter 1,500 x 1,820 mm (H)	Diameter 60" x 72" (H)
N700F	700		Diameter 1,500 x 2,130 mm (H)	Diameter 60" x 84" (H)
N700E	700		Diameter 1,780 x 1,650 mm (H)	Diameter 70" x 65" (H)
N800F	800		Diameter 1,500 x 2,350 mm (H)	Diameter 60" x 93" (H)
N800E	800		Diameter 1,780 x 1,820 mm (H)	Diameter 70" x 72" (H)
N900	900		Diameter 1,780 x 1,990 mm (H)	Diameter 70" x 79" (H)
N1000E	1000		Diameter 1,780 x 2,160 mm (H)	Diameter 70" x 85" (H)
N1000	1000		Diameter 1,900 x 1,950 mm (H)	Diameter 75" x 77" (H)
N1100	1100		Diameter 1,780 x 2,330 mm (H)	Diameter 70" x 92" (H)
N1200	1200		Diameter 1,780 x 2,500 mm (H)	Diameter 70" x 99" (H)
N1300	1300		Diameter 1,780 x 2,670 mm (H)	Diameter 70" x 105" (H)
N1400	1300		Diameter 1,780 x 2,850 mm (H)	Diameter 70" x 112" (H)
N1500E	1500		Diameter 1,780 x 3,020 mm (H)	Diameter 70" x 119" (H)
N1500	1500		Diameter 1,900 x 2,760 mm (H)	Diameter 75" x 109" (H)
N2000	2000		Diameter 2,500 x 2,250 mm (H)	Diameter 100" x 83" (H)
N2500	2500		Diameter 2,500 x 2,730 mm (H)	Diameter 100" x 108" (H)
N3000	3000		Diameter 2,500 x 3,200 mm (H)	Diameter 100" x 126" (H)
N3500	3500		Diameter 2,500 x 3,680 mm (H)	Diameter 100" x 145" (H)
N4000	4000		Diameter 3,200 x 2,720 mm (H)	Diameter 126" x 107" (H)
N5000	5000		Diameter 3,200 x 3,300 mm (H)	Diameter 126" x 130" (H)