



FULL SEPT


HDPE SEPTIC TANK




FEATURES AND ADVANTAGES

- ★ Premium engineering grade material for corrosion proof, lightweight, robust and impact resistant product.
- ★ High efficiency filtration and non-clogging of effluent.
- ★ Advanced molding manufacturing process.
- ★ Environmentally safe.
- ★ Easy and fast to installation.

HORIZONTAL

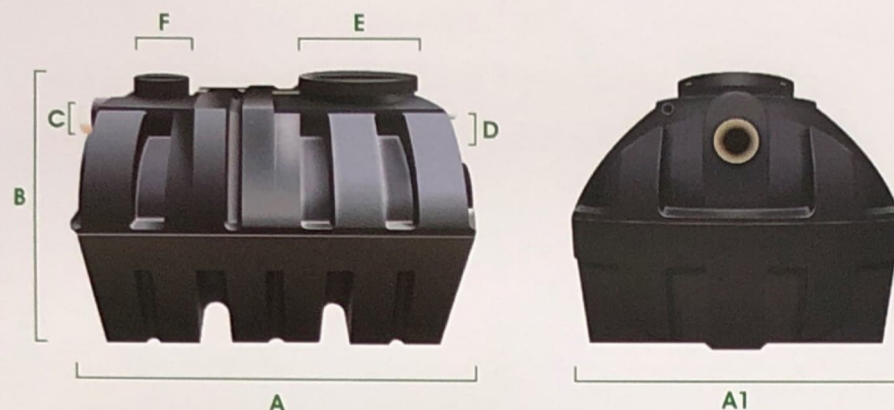

VERTICAL

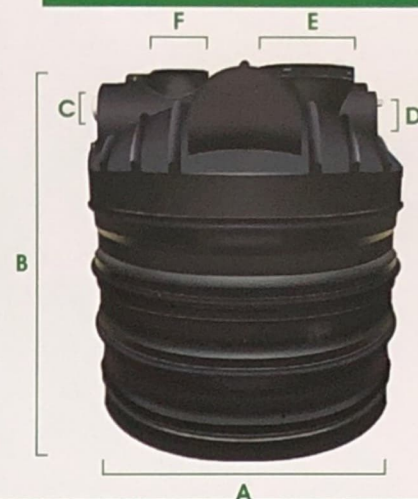

SEWERAGE TREATMENT SYSTEM

MODEL		FSR 4	FSR 5	FS 5
TYPE		Horizontal	Horizontal	Vertical
POPULATION EQUIVALENT		4	4	5
EFFECTIVE VOLUME (L)		1200	1500	1500
INLET / OUTLET DIAMETER (MM)		100	100	100
RETENTION TIME		24	24	24
DEMENSION (MM)	- A	1400	1525	1060
	- A1	1000	1300	-
	- B	860	940	1440
	- C	170	170	170
	- D	220	220	220
	- E	450	450	450
	- F	200	200	200

* Remark : Effluent to Standard B-Environmental Quality (Sewerage and Industrial Effluents) Regulation, 1979*

WARRANTY:

Provided you have satisfied the following conditions:-

- We shall not be held responsible for any defect or damage to the product's if the Installation Guidance are not adhered to.
- This warranty does not cover damage done during installation misuse, negligence, rough handling or accident in your project site.
- Our liability is limited to repair or replace (without installation) of the defection tank due to manufacturer's defect.

Dimensions and capacities of products are approximate due to manufacturing process.

KUNYI reserves the right to change or update,

- without notice any information contained in this catalogue.
- to change without notice the design, construction, materials, processing, or specification of the products; and to discontinue or limit production or distribution of any products.



Distributor by: