


TopLine®

TopLine®

TopLine® is a standard gypsum board with ivory face paper that displays a smooth surface. It has superior thermal insulation and non-combustible properties that are compliant with international standards.

Ceiling systems built with TopLine® opens a world of unlimited design possibilities allowing you to construct that beautiful architecture which encompasses pleasant acoustics, safety and reliability.

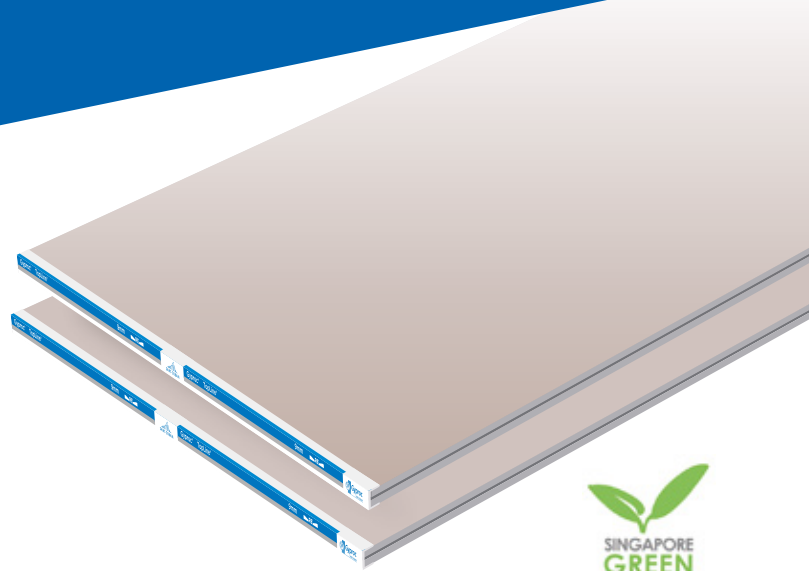

SGBP 2018-1224



CHARACTERISTICS

A standard gypsum board with an aerated gypsum core encased and firmly bonded to stronger paper liners.

RECOMMENDED USE

Suitable to be used in dry areas ceiling applications.

PRODUCT FORMAT

Thickness	9mm	
Nominal Weight	5.25kg/m ²	
Nominal Sheet Size	1220mm x 2440mm	
Edge Type	Recessed Edge 	Square Edge 

FIRE RATING

- Non-combustible in accordance to BS 476: Part 4
- Low fire propagation in accordance to BS 476: Part 6
- Class 1 surface spread of flame in accordance to BS 476: Part 7
- Classified as Class 0 material in accordance to local building regulations
- Low flame spread index <25 in accordance to ASTM E84

MANUFACTURING SPECIFICATIONS

- In compliance with ASTM C1396M and BS EN 520

AESTHETIC PROPERTIES

- Highly flexible in creating the highest standards of design
- Crack-free
- Easily decorated with paint, cornices, etc.
- Seamless and smooth finishing

HANDLING AND WORKABILITY

- Lightweight
- Quick and easy installation
- Applicable for curved ceiling installation. Minimum bending radius of 1.8m


HEALTH AND ENVIRONMENTAL CONTRIBUTIONS

- Made from 100% natural gypsum
- Recyclable material, hence environmentally friendly and certified with Green Product Certification Scheme
- Does not produce toxic fumes or hazardous substances that are harmful to health
- Product is manufactured in a facility certified to standards of ISO 14001 and ISO 9002.




Gyproc® CLASSIC Concealed Ceiling System

A concealed suspended ceiling system that gives a beautiful, homogeneous appearance, smooth finish without visible joints.

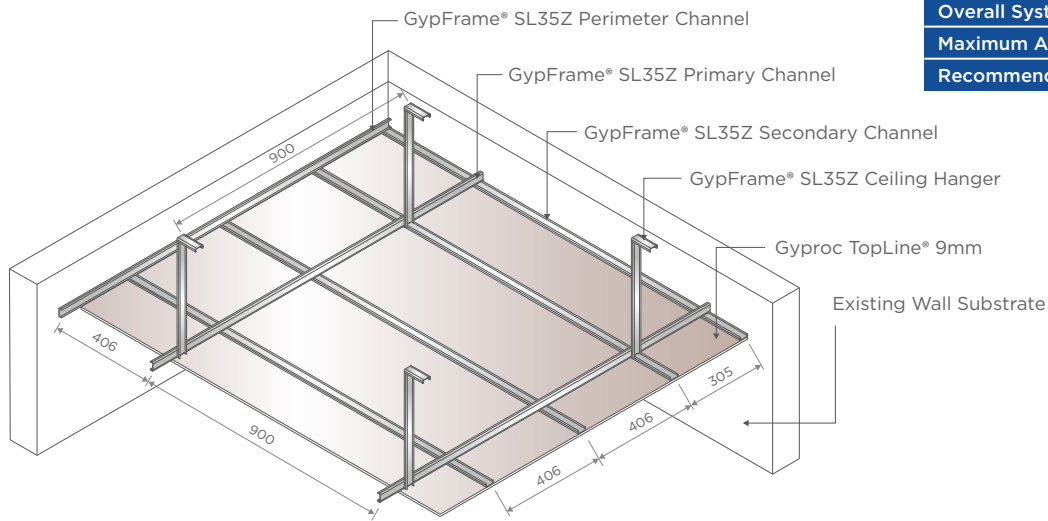

Gyproc® SL35Z

Parameters	Values
Overall System Weight	7.30kg/m ²
Maximum Allowable Loads	3.00kg/m ²
Recommended Ceiling Drop	≤ 1.50m

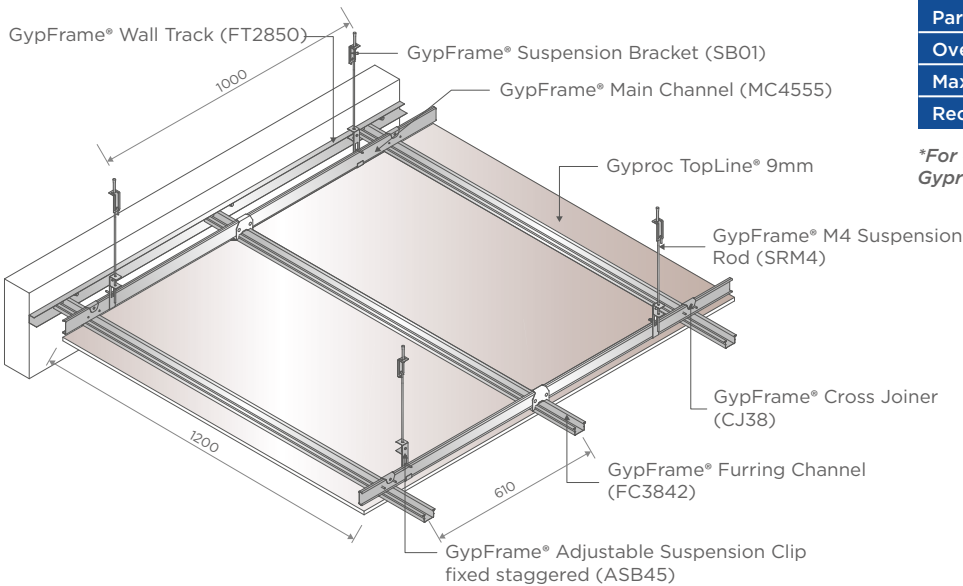

Gyproc® Gyprock™ Standard

Parameters	Values
Overall System Weight	7.80kg/m ²
Maximum Allowable Loads	3.00kg/m ²
Recommended Ceiling Drop	> 1.50m up to 3.00m

**For ceiling drop more than 3.00m please contact Gyproc® for recommendation*



Saint-Gobain Malaysia Sdn. Bhd. (636775-T)
 No.1, Jalan Sultan Mohamad 4
 Kawasan Perindustrian Bandar
 Sultan Suleiman, Port Klang,
 42000 Selangor, Malaysia.
 Tel: +603 3169 5588
 Fax: +603 3169 5688
 Email: solutions.my@saint-gobain.com
www.gyproc.my

SINGAPORE OFFICE
Saint-Gobain (Singapore) Pte.Ltd.
 2 Venture Drive, #09-10/11/12/13/14
 Vision Exchange
 Singapore 608526
 Tel: +65 6330 8288
www.gyproc.sg