



# CODING

CM 800F LASER MARKING SYSTEM

**CYKLOP**<sup>®</sup>  
GLOBAL PACKAGING SOLUTIONS

STRAPPING  
WRAPPING  
CODING  
TAPING

# CM 800F

# Laser marking system

CM 800F series fiber laser marking system, with its light and agile marking unit, help customers to achieve high-quality and high-speed printing in various production situations. The printing content is flexible, not restricted by fonts, coding or graphics. It is an ideal coding solution for auto-parts, electronics, can, cosmetic, pharma and building material industrials.

### Non-stop

- ✓ High performance long -life laser source increases uptime significantly
- ✓ Air-cooled laser source and no wearing parts requires no additional-maintenance

### Easy to operate


- ✓ Flexible integrated solution with multiple standard beam transmission options
- ✓ Highly integrated modular design ensures simple and convenient installation and maintenance

### High efficiency




- ✓ High-speed digital galvanometer system to ensure high speed and accuracy
- ✓ Smaller spot size and concentrated energy to handle difficult materials and complex marking requirements
- ✓ Optimized vector calculation logic for more precise and efficient control of lines

### No mistake

- ✓ In-house developed touch screen high-speed laser printer control system
- ✓ Human-machine interaction, reducing mis-operations and ensuring correct marking
- ✓ Multiple high-resolution print field lens options provide accurate and perfect identification



Technical specifications	
Marking speed	Up to 2,000 characters/second
Line speed	Up to 200/min
Wave lengths	1,055 - 1,070 nm
Marking format	Standard industrial fonts, Bar codes, QR-Code, Data Matrix, Aztec-Code, Han Xin-Code, Graphics, Logos, Symbols, etc.
Laser tube	Ytterbium (Yb) pulsed fiber laser
User interface	Personalized touch control screen
Communication	UDP, TCP/IP and RS232
Integration	Flexible beam delivery options
Electrical requirement	110-240 VAC(To be noted when ordering) ~50/60 Hz 1 PH 0.70 KW
Environment	Temperature 5-40°C (41-104°F) Humidity 10%-90%, no condensing
Sealing and safety standards	Cabinet: IP54 standard Marking Unit: IP54 standard
Weight	Standard unit: approx. 40 kg

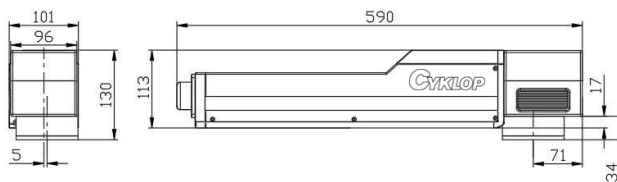

Cyklop GmbH  
Industriestrasse 133  
50996 Köln  
Germany

Phone: +49 (0) 2236-602-0  
Fax: +49 (0) 2236-602-578  
www.cyklop.com  
info@cyklop.de



Subject to Modification. © Cyklop GmbH, Cologne, Proprietary notice pursuant to ISO 16016 to be observed. 04.2020