


HOTWORK EJECTOR PINS LIST & SPECIFICATION

DIMENSION: MM
PRICE (RM) PER PC

EP

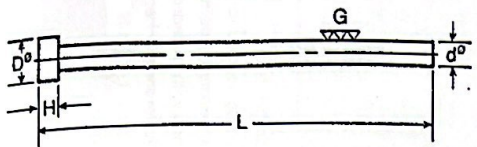

How to Order : Type d - L x Qty
Catalog No : EP 1 x 100 100 pcs
Material : Hot Work Die Steel
Core Hardness : HRC 60° ~ 42°
Surface Hardness : HV 900°


Tolerance of Finish :
 $d\phi = \begin{matrix} +0 \\ -0.02 \end{matrix}$ $D\phi = \begin{matrix} +0 \\ -0.1 \end{matrix}$ $H = \begin{matrix} +0 \\ -0.08 \end{matrix}$ $L = \begin{matrix} +2.0 \\ -0 \end{matrix}$

Time of Delivery : Ready Stock

do	SIZE		LENGTH			U. PRICE	
	D	8	100	150	200	250	300
0.8	3	4
1.0	6	4
1.1	6	4
1.2	6	4
1.3	6	4
1.4	6	4
1.5	6	4
1.6	6	4
1.7	6	4
1.8	6	4
1.9	6	4
2.0	6	4
2.1	6	4
2.2	6	4
2.3	6	4
2.4	6	4
2.5	6	4
2.6	6	4
2.7	6	4
2.8	6	4
2.9	6	4
3.0	6	4
3.5	7	4
4.0	8	5
4.5	8	5
5.0	8	5
6.0	10	6
7.0	10	6
8.0	13	8
9.0	14	8
10.0	15	8
12.0	17	8
14.0	19	8
15.0	20	8
16.0	21	8

SKD EJECTOR PINS LIST & SPECIFICATION

EPS

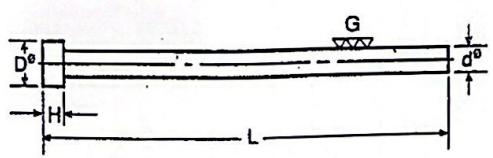

How to Order : Type d - L x Qty
Catalog No : EP 1 X 100 100pcs
Material : SKD-61
Core Hardness : HRC 40° ± 2°
Surface Hardness : 60 ± 2°

Tolerance of Finish:
 $d\phi = \begin{matrix} +0 \\ -0.02 \end{matrix}$ $D\phi = \begin{matrix} +0 \\ -0.1 \end{matrix}$ $H = \begin{matrix} +0 \\ -0.08 \end{matrix}$ $L = \begin{matrix} +2.0 \\ -0 \end{matrix}$

Time of Delivery : Ready Stock

D	L	100	150	200	250	300	350	400
1.0x
1.5x
2.0x
2.5x
3.0x
3.5x
4.0x
4.5x
5.0x
5.5x
6.0x
7.0x
8.0x
9.0x
10x
12x
14x
15x
16x