
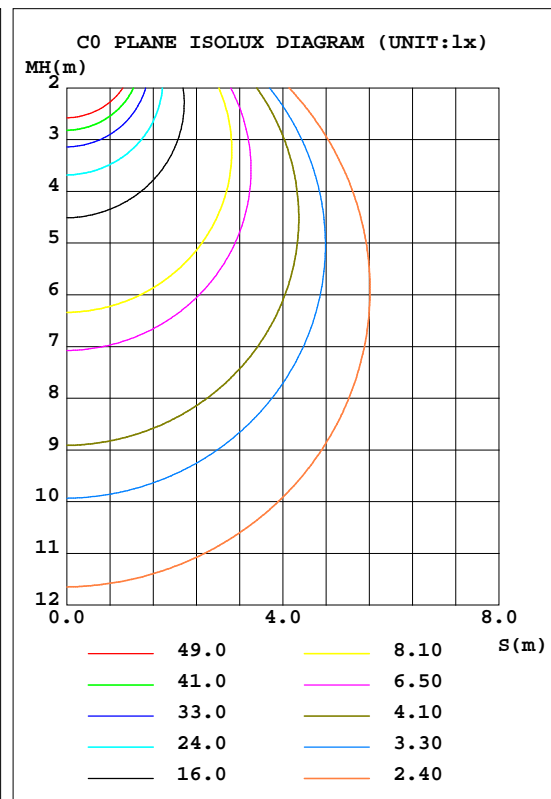


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm		
NAME: DLS-LS1607FDXSS1000	TYPE:	WEIGHT:
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC	DIM.: 1000*16*07mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*16	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 64.80 lm/W
MODEL	DLS-LS1607FDXSS1000	I <sub>max</sub> (cd)	325.7	S/MH(C0/180)		1.24
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)		1.26
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	956.40	h UP, DN(C0-180)		0.8,49.1
NOMINAL FLUX(lm)	956.399	CIE CLASS	DIRECT	h UP, DN(C180-360)		0.7,49.4
LAMPS INSIDE	1	h up(%)	1.6	CIBSE SHR NOM		1.25
TEST VOLTAGE(V)	24	h down(%)	98.4	CIBSE SHR MAX		1.35

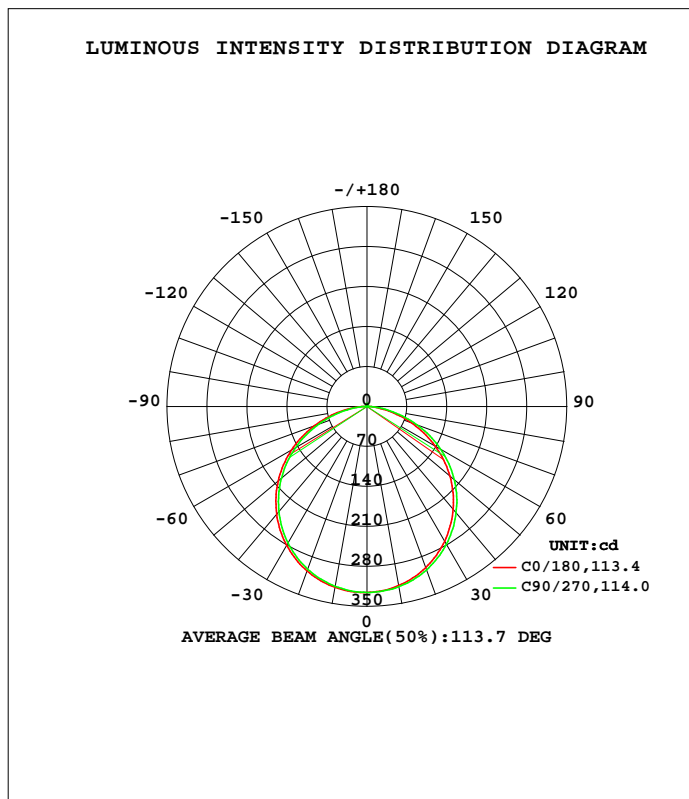

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	318.4	319.5	320.5	321.8	321.6	320.9	319.8	318.5	0- 10	30.82	30.82	3.22,3.22
20	300.4	302.5	304.6	307.2	306.5	305.5	303.3	300.7	10- 20	88.44	119.3	12.5,12.5
30	272.2	275.3	278.4	282.1	281.1	279.8	276.5	272.9	20- 30	134.5	253.8	26.5,26.5
40	235.0	238.8	242.9	247.5	246.2	244.6	240.0	235.5	30- 40	162.9	416.6	43.6,43.6
50	189.7	193.9	199.9	204.3	202.9	200.7	195.7	189.8	40- 50	169.8	586.4	61.3,61.3
60	137.6	142.5	148.4	154.3	152.6	149.9	144.8	137.9	50- 60	153.9	740.3	77.4,77.4
70	81.52	85.48	92.32	98.24	97.35	94.69	88.98	81.67	60- 70	117.0	857.3	89.6,89.6
80	29.84	32.40	37.08	43.02	43.44	40.72	35.79	29.69	70- 80	65.95	923.3	96.5,96.5
90	1.850	2.155	2.100	4.169	4.537	3.677	1.864	1.454	80- 90	18.11	941.4	98.4,98.4
100	1.102	1.162	1.069	0.9820	0.6815	0.9347	0.6226	1.121	90-100	1.433	942.8	98.6,98.6
110	1.773	1.685	1.608	1.417	1.258	1.255	1.371	1.383	100-110	1.256	944.1	98.7,98.7
120	2.536	2.486	2.438	2.065	1.932	1.817	1.999	2.036	110-120	1.794	945.9	98.9,98.9
130	3.258	3.133	3.079	2.733	2.620	2.545	2.559	2.657	120-130	2.238	948.1	99.1,99.1
140	3.847	3.588	3.573	3.367	3.207	3.184	2.967	3.032	130-140	2.391	950.5	99.4,99.4
150	4.281	3.868	3.952	3.975	3.661	3.834	3.460	3.320	140-150	2.237	952.7	99.6,99.6
160	4.702	4.135	4.528	4.543	4.183	4.462	4.270	3.834	150-160	1.871	954.6	99.8,99.8
170	5.016	4.763	5.130	5.071	4.308	5.016	5.044	4.709	160-170	1.300	955.9	99.9,99.9
180	4.789	5.571	5.658	5.664	4.749	5.564	5.671	5.651	170-180	0.4819	956.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm		
NAME: DLS-LS1607FDXSS1000	TYPE:	WEIGHT:
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC	DIM.: 1000*16*07mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*16	Shielding Angle:

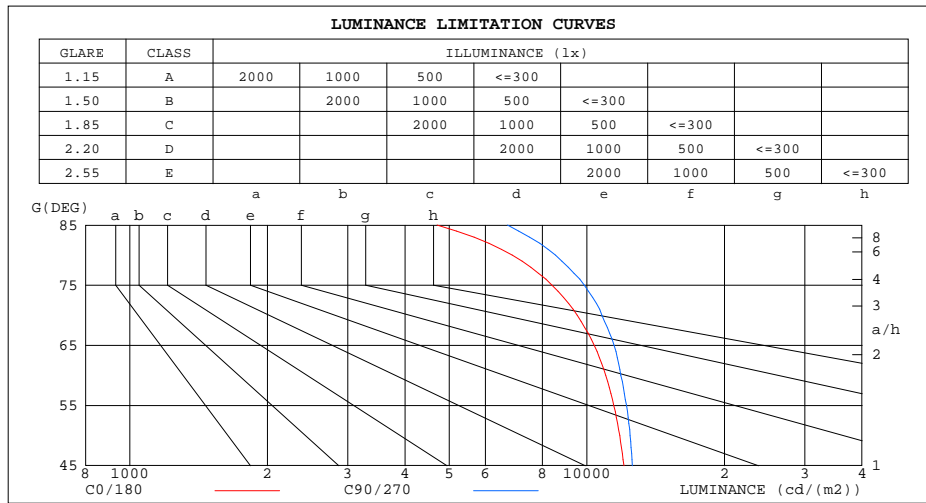

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	4702	6706
80	6873	8542
75	8394	9876
70	9534	10798
65	10381	11470
60	11006	11876
55	11461	12208
50	11802	12441
45	12059	12578


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

G Range: 0 - 180DEG  
 G Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm		
NAME: DLS-LS1607FDXSS1000	TYPE:	WEIGHT:
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC	DIM.: 1000*16*07mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*16	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.03	.99	.95	1.01	.97	.94	.97	.93	.90	.92	.90	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.71	.68
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.36	.30	.25	.35	.30	.25	.24

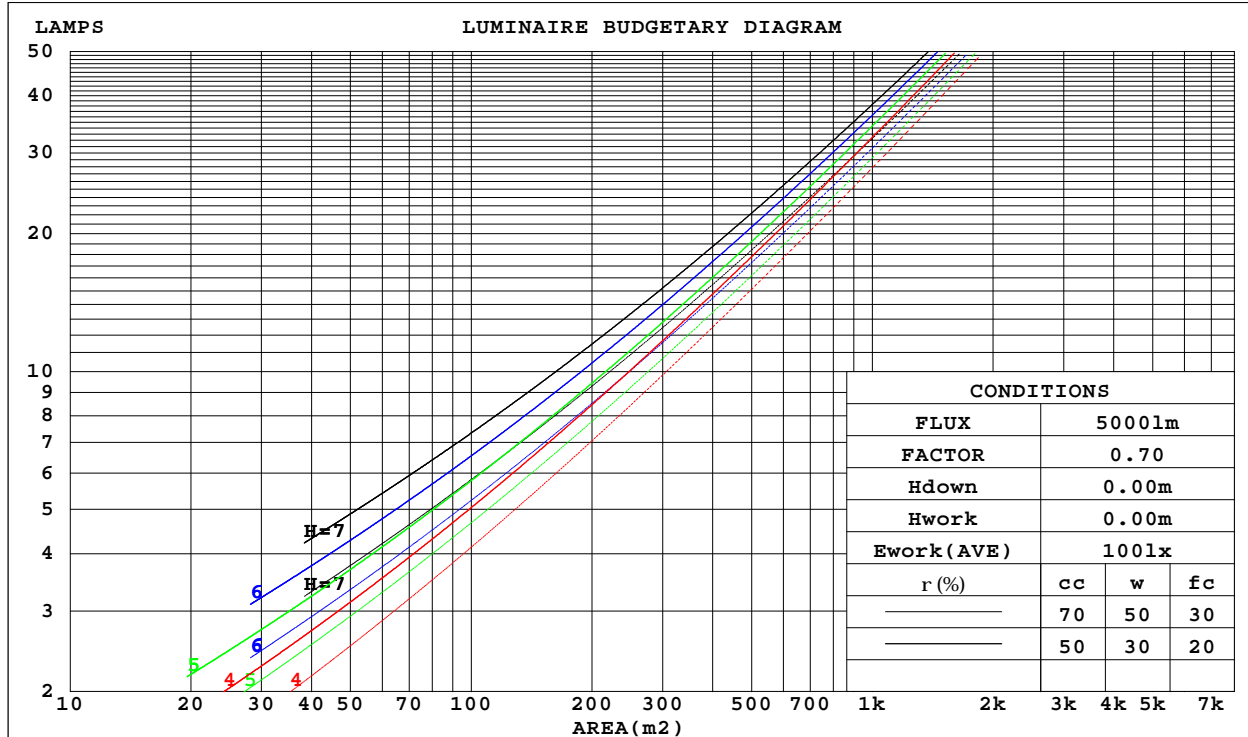

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm		
NAME: DLS-LS1607FDXSS1000	TYPE:	WEIGHT:
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC	DIM.: 1000*16*07mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*16	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.310	.176	.056	.302	.173	.055	.288	.165	.053	.275	.159	.051	.263	.153	.049	
2.0	.292	.160	.049	.285	.157	.048	.273	.152	.047	.261	.146	.046	.250	.142	.045	
3.0	.270	.144	.043	.264	.141	.043	.253	.137	.042	.243	.133	.041	.233	.129	.040	
4.0	.249	.129	.038	.244	.128	.038	.234	.124	.037	.225	.121	.036	.216	.118	.036	
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.209	.110	.033	.201	.107	.032	
6.0	.214	.107	.031	.209	.106	.030	.202	.103	.030	.194	.101	.030	.187	.099	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.186	.091	.026	.182	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.146	.073	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.146	.165	.144	.126	.113	.099	.087	.065	.057	.051	.021	.018	.016	
2.0	.184	.144	.110	.158	.124	.095	.108	.086	.066	.062	.050	.039	.020	.016	.013	
3.0	.177	.126	.086	.151	.109	.075	.104	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.071	.145	.098	.061	.100	.068	.043	.058	.040	.026	.019	.013	.008	
5.0	.162	.103	.059	.139	.089	.052	.096	.062	.037	.055	.037	.022	.018	.012	.007	
6.0	.155	.095	.051	.133	.082	.045	.092	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.148	.088	.046	.127	.076	.040	.088	.053	.028	.051	.031	.017	.016	.010	.006	
8.0	.141	.082	.041	.122	.071	.036	.084	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.135	.077	.038	.117	.067	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.130	.073	.035	.112	.063	.030	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm										
NAME: DLS-LS1607FDXSS1000					TYPE:			WEIGHT:		
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC					DIM.: 1000*16*07mm			SERIAL No.:		
MFR.: COLORS					SUR.:1000*16			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.3	22.8	21.6	23.1	23.3	21.6	23.1	21.9	23.3	23.6
3H	22.7	24.1	23.1	24.4	24.7	23.1	24.5	23.5	24.8	25.1
4H	23.2	24.6	23.6	24.8	25.1	23.7	25.0	24.1	25.3	25.6
6H	23.5	24.8	23.9	25.1	25.4	24.1	25.4	24.5	25.7	26.0
8H	23.6	24.8	24.0	25.1	25.4	24.2	25.4	24.6	25.7	26.1
12H	23.6	24.8	24.0	25.1	25.4	24.3	25.4	24.7	25.8	26.1
4H 2H	22.0	23.3	22.3	23.6	23.8	22.2	23.5	22.5	23.8	24.1
3H	23.5	24.7	23.9	25.0	25.3	23.9	25.0	24.2	25.3	25.7
4H	24.1	25.2	24.5	25.5	25.9	24.6	25.6	24.9	26.0	26.3
6H	24.5	25.5	25.0	25.9	26.3	25.1	26.0	25.5	26.4	26.8
8H	24.7	25.5	25.1	25.9	26.3	25.2	26.1	25.7	26.5	26.9
12H	24.7	25.5	25.2	25.9	26.4	25.3	26.1	25.8	26.5	27.0
8H 4H	24.4	25.2	24.8	25.6	26.1	24.7	25.6	25.2	26.0	26.4
6H	24.9	25.6	25.4	26.1	26.5	25.4	26.1	25.9	26.5	27.0
8H	25.1	25.7	25.6	26.2	26.7	25.6	26.3	26.1	26.7	27.2
12H	25.2	25.7	25.7	26.2	26.7	25.8	26.3	26.3	26.8	27.3
12H 4H	24.4	25.2	24.8	25.6	26.0	24.7	25.5	25.2	26.0	26.4
6H	25.0	25.6	25.4	26.0	26.5	25.4	26.1	25.9	26.5	27.0
8H	25.2	25.7	25.7	26.2	26.7	25.7	26.2	26.2	26.7	27.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 956.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.2)

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm		
NAME: DLS-LS1607FDXSS1000	TYPE:	WEIGHT:
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC	DIM.: 1000*16*07mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*16	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	65	81	71	64	78	69	63	56
1.50	87	77	70	86	77	70	82	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	82
5.00	108	103	99	106	101	97	101	97	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm		
NAME: DLS-LS1607FDXSS1000	TYPE:	WEIGHT:
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC	DIM.: 1000*16*07mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*16	Shielding Angle:

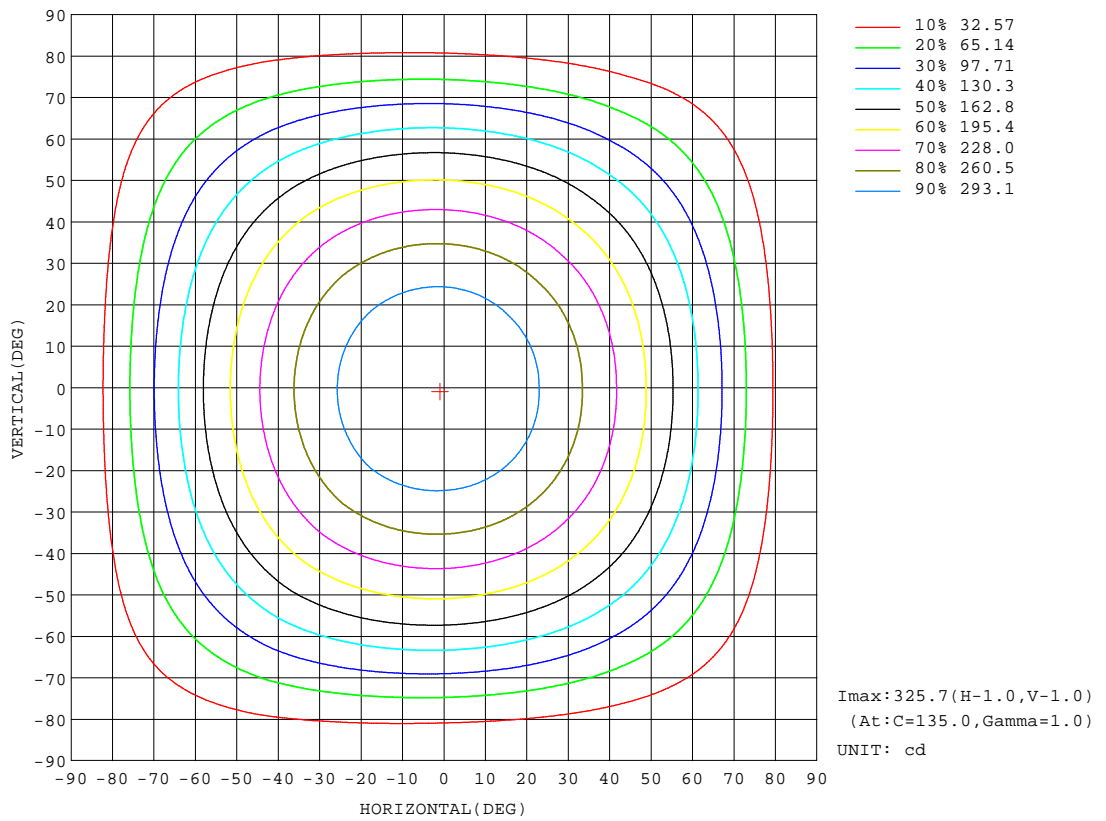

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28


Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:



AAI Figure

Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm		
NAME: DLS-LS1607FDXSS1000	TYPE:	WEIGHT:
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC	DIM.: 1000*16*07mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*16	Shielding Angle:

Flux out:697.1 lm

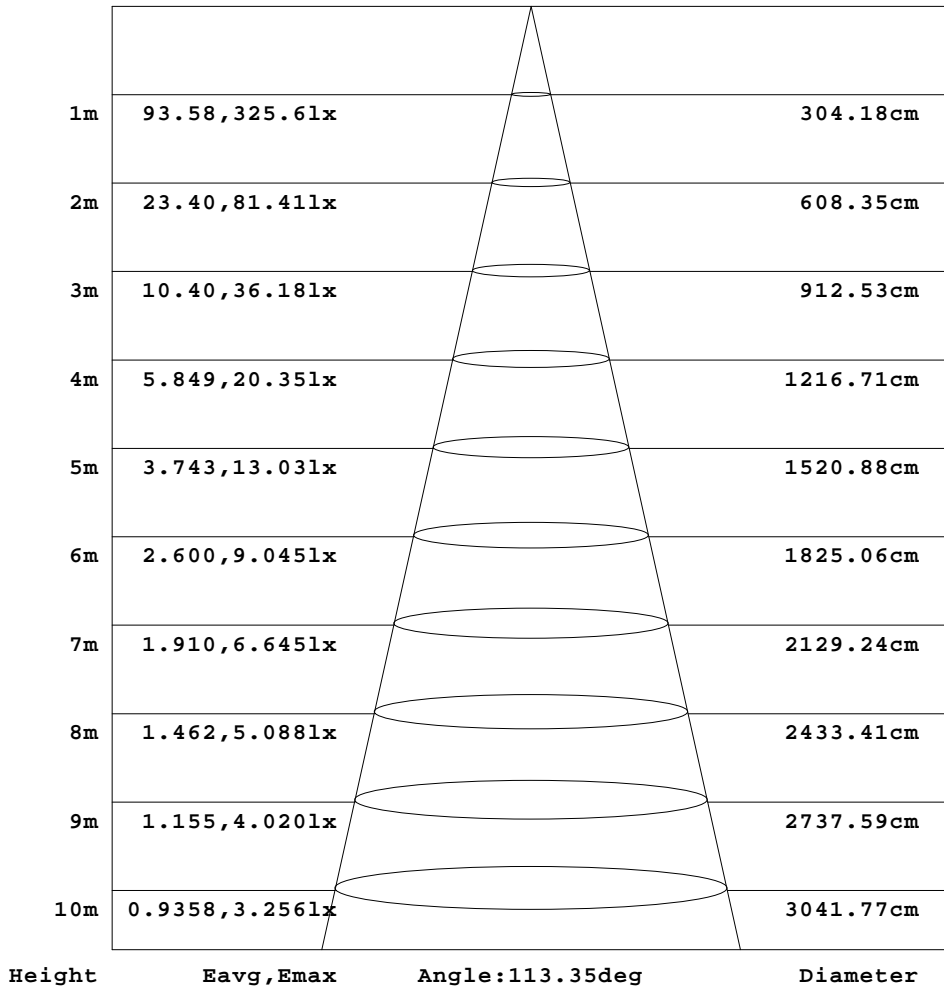


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm		
NAME: DLS-LS1607FDXSS1000	TYPE:	WEIGHT:
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC	DIM.: 1000*16*07mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*16	Shielding Angle:

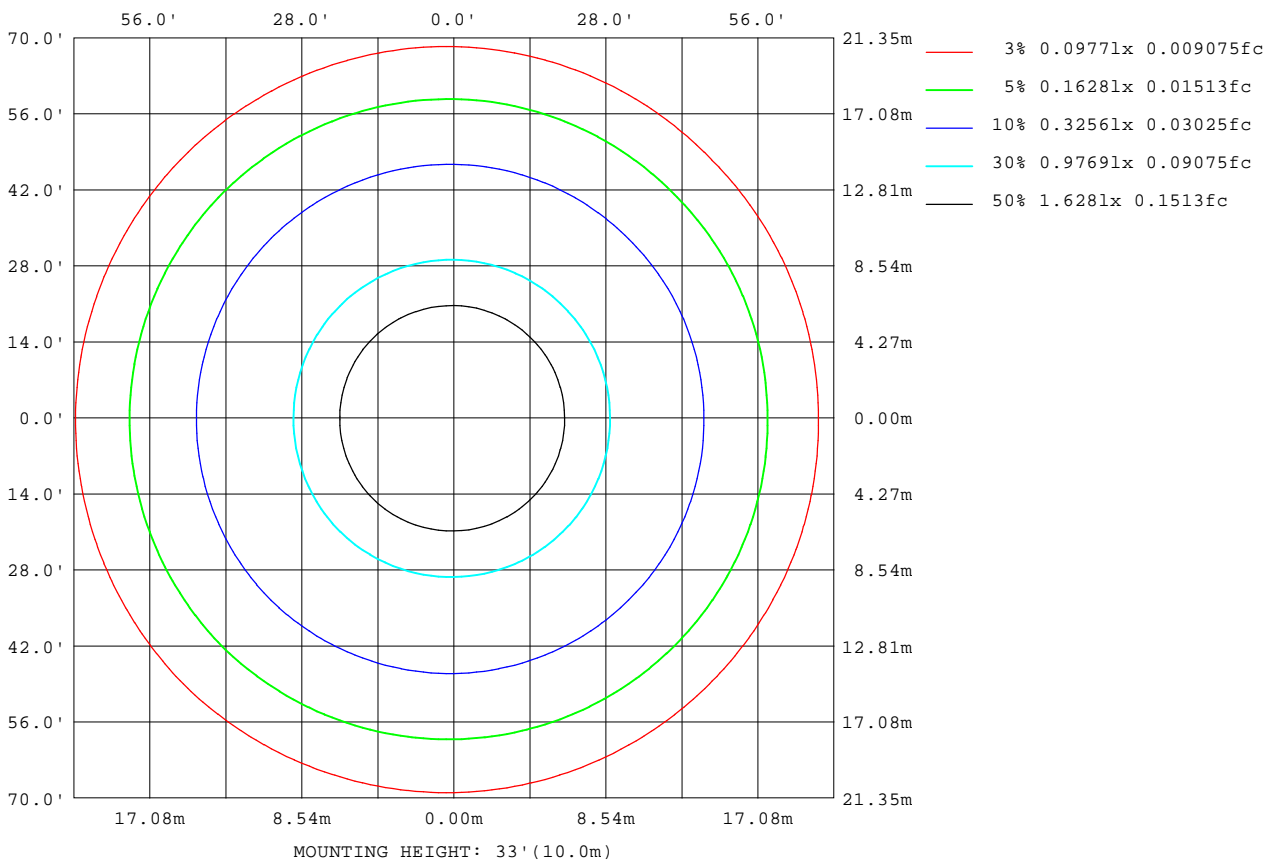

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

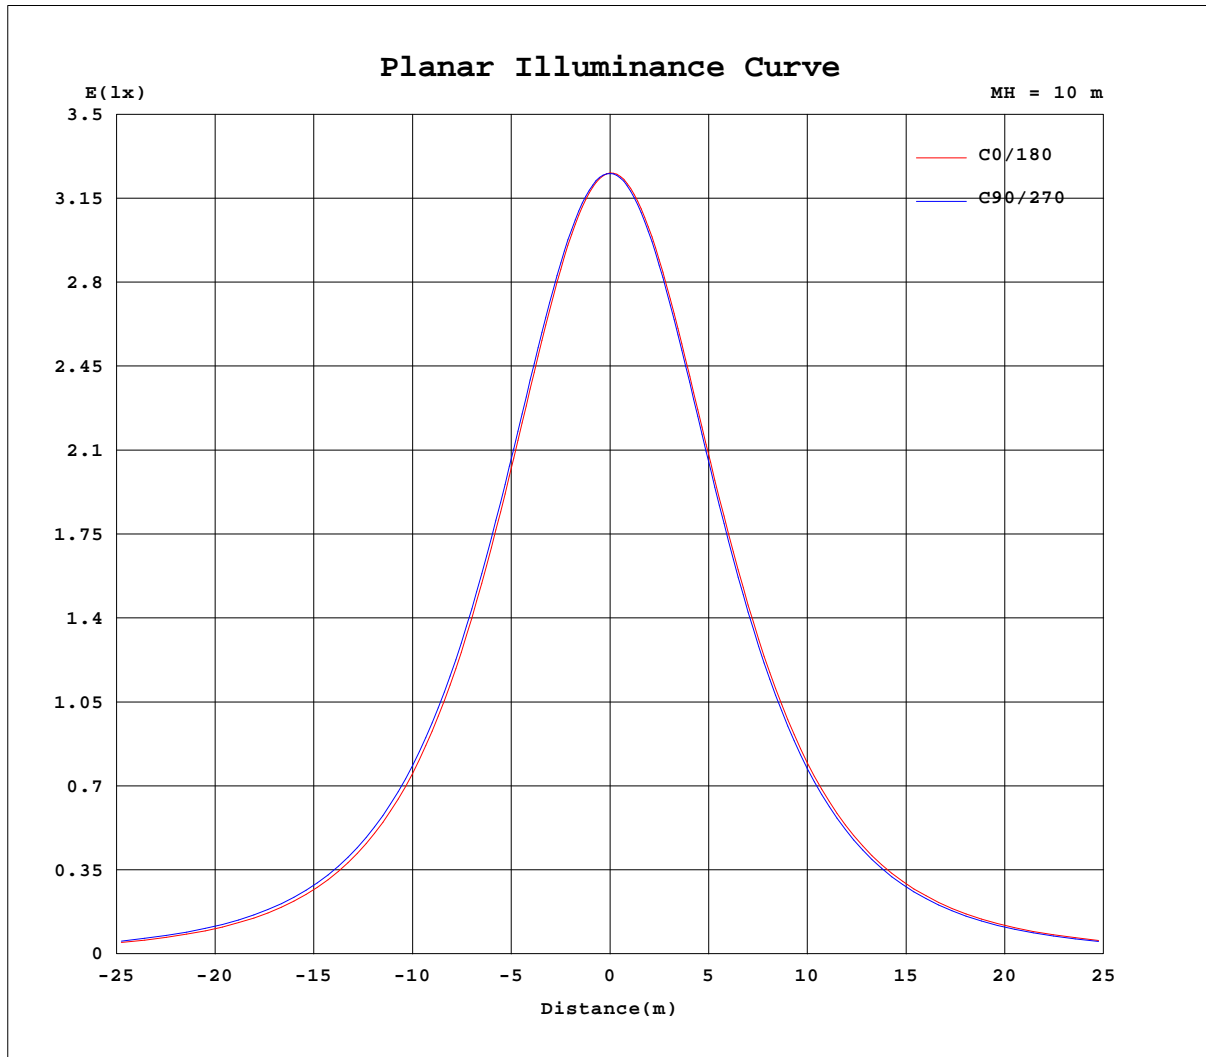

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: JYH  
 Test Date: 2021-03-28

Page Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 10.950m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.6150A P:14.76W PF:1.000 Freq:0Hz Lamp Flux:956.399x1 lm		
NAME: DLS-LS1607FDXSS1000	TYPE:	WEIGHT:
SPEC.:DLS-LS1607FDXSS1000-F15NW9X-DC	DIM.: 1000*16*07mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*16	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	326	326	325	326	326	326	325	326										
5	323	324	324	325	325	325	324	323										
10	318	320	320	322	322	321	320	318										
15	311	312	314	316	315	315	313	311										
20	300	303	305	307	307	305	303	301										
25	288	290	293	296	295	294	291	288										
30	272	275	278	282	281	280	276	273										
35	255	258	262	266	265	263	259	255										
40	235	239	243	247	246	245	240	236										
45	213	217	222	227	226	224	219	214										
50	190	194	200	204	203	201	196	190										
55	164	169	175	180	179	176	171	164										
60	138	142	148	154	153	150	145	138										
65	110	114	121	127	125	123	117	110										
70	81.5	85.5	92.3	98.2	97.4	94.7	89.0	81.7										
75	54.3	57.6	63.9	69.8	69.5	66.7	61.5	54.3										
80	29.8	32.4	37.1	43.0	43.4	40.7	35.8	29.7										
85	10.2	11.8	14.6	20.1	20.7	18.6	15.0	10.3										
90	1.85	2.16	2.10	4.17	4.54	3.68	1.86	1.45										
95	1.37	1.36	1.65	1.31	0.82	1.04	0.35	1.08										
100	1.10	1.16	1.07	0.98	0.68	0.93	0.62	1.12										
105	1.36	1.36	1.23	1.18	0.93	1.13	0.99	1.30										
110	1.77	1.68	1.61	1.42	1.26	1.25	1.37	1.38										
115	2.12	2.07	2.05	1.74	1.58	1.48	1.69	1.72										
120	2.54	2.49	2.44	2.06	1.93	1.82	2.00	2.04										
125	2.91	2.84	2.77	2.41	2.27	2.18	2.29	2.33										
130	3.26	3.13	3.08	2.73	2.62	2.54	2.56	2.66										
135	3.58	3.40	3.37	3.07	2.93	2.87	2.79	2.85										
140	3.85	3.59	3.57	3.37	3.21	3.18	2.97	3.03										
145	4.07	3.75	3.71	3.68	3.43	3.53	3.16	3.19										
150	4.28	3.87	3.95	3.97	3.66	3.83	3.46	3.32										
155	4.50	3.98	4.15	4.29	3.92	4.16	3.88	3.52										
160	4.70	4.14	4.53	4.54	4.18	4.46	4.27	3.83										
165	4.92	4.38	4.92	4.80	4.38	4.71	4.65	4.25										
170	5.02	4.76	5.13	5.07	4.31	5.02	5.04	4.71										
175	4.75	5.18	5.42	5.37	4.38	5.30	5.38	5.23										
180	4.79	5.57	5.66	5.66	4.75	5.56	5.67	5.65										

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2021-03-28

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks: