



PRO Series

Specification


D8192

24V-10mm





【General description】

- Luminance efficiency up to 155LM/W
- Self-encapsulated design offers eight optional 1900-6000K white lights
- With life span over 60000H
- Ta: -25-40°C; Tc: 75°C (max)

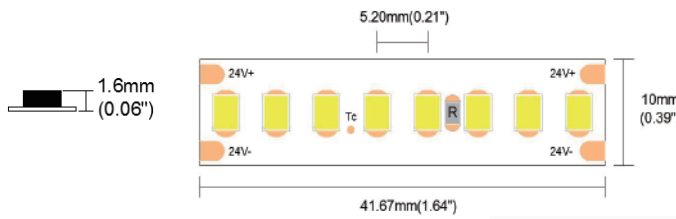

【Dimension】

- | | |
|------------------------------------|------------------------------------|
| Input voltage: DC24V | Max.length: 5000mm(16.4') |
| CRI: 80/90/95 | Cutting unit: 8leds/41.67mm(1.64") |
| Max.power: 17.6W(1m) | LED pitch: 5.2mm(0.21") |
| Power range: 14.4 ~ 17.6W(1m) | Min. bend diameter: Φ60mm(2.36") |
| Rated current: 0.67A(1m) /2.7A(5m) | Mounting: 3M tape |
| Typical Power: 16W(1m) /64.8W(5m) | Copper foil: 3oz |
| tape IP: IP20/IP65 | |
| On-off times: 10000 (test times) | |
| Warranty: 5years | |




【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>80	CW	1900K	1880	570	118	F
Ra>80	LW	2300K	2090	635	131	E
Ra>80	SW	2700K	2260	685	141	E
Ra>80	WW	3000K	2380	725	149	D
Ra>80	PW	3500K	2420	735	151	D
Ra>80	NW	4000K	2480	755	155	D
Ra>80	DW	5000K	2480	755	155	D
Ra>80	W	6000K	2380	725	149	D
Ra>90	CW	1900K	1505	455	94	G
Ra>90	LW	2300K	1675	510	105	F
Ra>90	SW	2700K	1810	550	113	F
Ra>90	WW	3000K	1905	580	119	E
Ra>90	PW	3500K	1935	585	121	E
Ra>90	NW	4000K	1985	605	124	E
Ra>90	DW	5000K	1985	605	124	E
Ra>90	W	6000K	1905	580	119	E

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>95	GW	1900K	1495	370	93	G
Ra>95	LW	2300K	1660	410	104	F
Ra>95	SW	2700K	1795	445	112	F
Ra>95	WW	3000K	1890	470	118	F
Ra>95	PW	3500K	1920	475	120	E
Ra>95	NW	4000K	1970	490	123	E
Ra>95	DW	5000K	1970	490	123	E
Ra>0	G	525nm	1440	355	90	/
Ra>0	B	470nm	320	80	20	/


- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/1merter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.

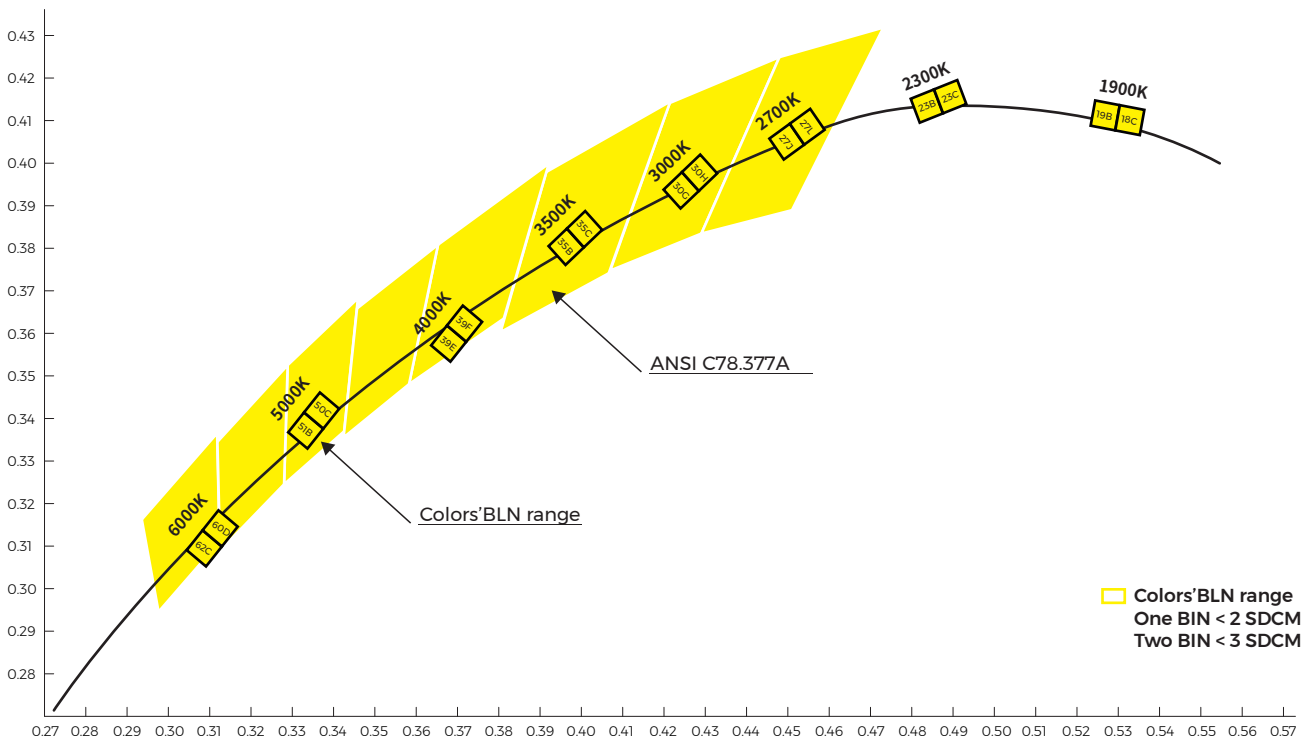

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	5000*10*1.6	5	250	0.14	7	8.05	41*41*26
NA	5000*10*1.7	5	250	0.144	7.2	8.28	41*41*26

Remark: data with 10% tolerance

· Engineering packaging of NO(IP20)/NA(IP65).

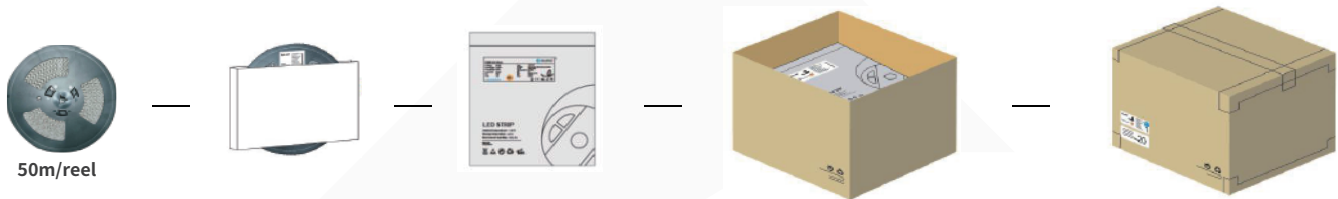

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	50000*10*1.6	50	500	1.4	14	16.1	41*41*26
NA	50000*10*1.7	50	500	1.44	14.4	16.56	41*41*26

Remark: data with 10% tolerance

【Precautions】

- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED beads.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25 C ~40 C. Storage temperature: 0 C ~60 C. Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP process of the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.