



Calibration Port



Communication Panel



Internal Chamber  
(Stainless Steel)

## HUMIDITY CHAMBER 500 LITRES

Standard: EN 196-1, EN 12390-2, EN 12390-9

### Temperature & Humidity Control

Constant temperature and humidity testing machine is one of the commonly used equipment in various environmental experiments. This humidity chamber is suitable for various electronic components such as electronic instruments, materials, metals, and electronic products to test their performance and various indicators and quality management in high temperature, low temperature or hot and humid environments.


### Technical Specifications :

Model Number	TT 3030 X / 006N
Temperature Range	- 40°C ~ 150°C
Temperature Deviation	±2°C
Humidity Range	20 ~ 98 % RH
Avg. Heating & Cooling Rate	0.7 ~ 1.0°C / min (under no-load condition)
Chamber Dimension	800(D) x 700(W) x 900(H) mm
External Dimension	1520(D) x 1000(W) x 1800(H) mm
Power Supply	220~240 V, 10 kW, 1 Ph, 50/60 Hz

\*1 Copy of Manual Instruction

### Unit Consists Of :

Model Number	Parts Description	Qty
TT 3030 X 006N - P 001	Compartment Shelves	2pcs

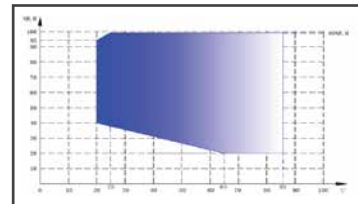

Humidity Range



Screen Display