
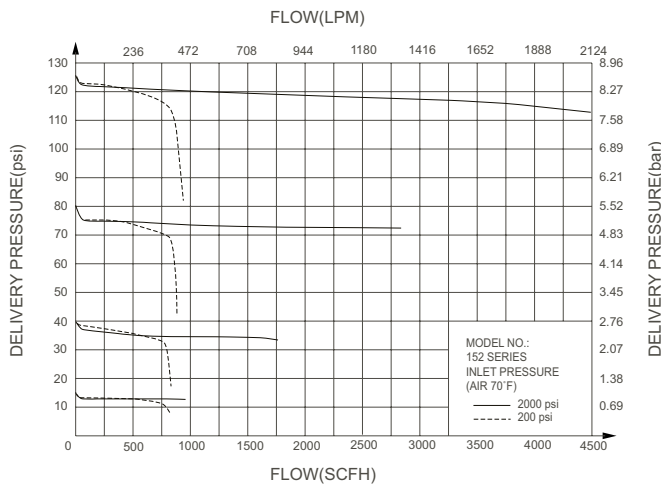
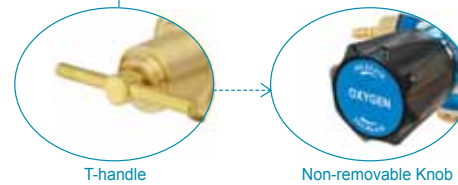


152 Series Regulators

Designed for medium duty gas welding, cutting, and heating applications. These regulators are ideal for industrial applications, farm repairs and laboratory testing, etc.

- Forged brass body and housing cap
- Delrin-cap bushing for smooth adjustments
- Self re-seating external pressure relief valve on oxygen, inert gas, and air models
- Sintered bronze inlet filter
- Stem-type seat assembly for more reliable performance
- 2" gauges for easy reading
- 2" diaphragm
- Steel Gauge Protectors are color coded: green for Oxygen (GP21X) and red for Acetylene (GP21Y)
- Weight: 2 lbs 11 oz (1.2 kg)
- UL Listed

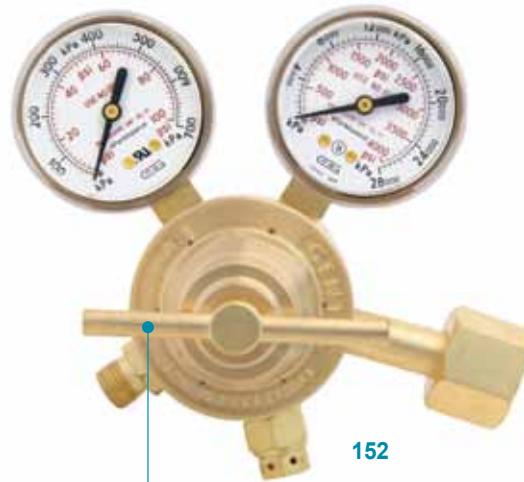

Model Number	Gas Service	Maximum Inlet Pressure	Maximum Delivery Pressure	Inlet Gauge	Outlet Gauge	Inlet Connection	Outlet Connection
152F-80	L.P. GAS	400 psi (28 bar)	4-80 psi (0.28-5.5 bar)	2", 400 psi (28 bar)	2", 100 psi (7 bar)	BS4, G 5/8"-LH(M)	G 3/8"-LH(M)
152X-80	OXYGEN	3000 psi (207 bar)	4-80 psi (0.28-5.5 bar)	2", 4000 psi (280 bar)	2", 100 psi (7 bar)	BS3, G 5/8"-RH(M)	G 3/8"-RH(M)
152X-125	OXYGEN	3000 psi (207 bar)	5-125 psi (0.35-8.6 bar)	2", 4000 psi (280 bar)	2", 200 psi (14 bar)		
152Y-15	ACETYLENE	400 psi (28 bar)	2-15 psi (0.14-1.03 bar)	2", 400 psi (28 bar)	2", 30 psi (2 bar), RL	BS4, G 5/8"-LH(M)	G 3/8"-LH(M)
152IN-125	INERT GAS (Ar, He, N ₂)	3000 psi (207 bar)	5-125 psi (0.35-8.6 bar)	2", 4000 psi (280 bar)	2", 200 psi (14 bar)	BS3, G 5/8"-RH(M)	G 3/8"-RH(M)
152H-15	HYDROGEN METHANE	3000 psi (207 bar)	2-15 psi (0.14-1.03 bar)	2", 4000 psi (280 bar)	2", 30 psi (2 bar)	BS4, G 5/8"-LH(M)	G 3/8"-LH(M)
152H-40		3000 psi (207 bar)	2-40 psi (0.14-2.76 bar)	2", 4000 psi (280 bar)	2", 60 psi (4 bar)		
152H-125		3000 psi (207 bar)	5-125 psi (0.35-8.6 bar)	2", 4000 psi (280 bar)	2", 200 psi (14 bar)		

1 psi = 0.00689 MPa = 6.895 kPa = 0.06895 bar = 0.07 kgf / cm², 1 scfh = 0.0283 m³/h = 0.472 LPM