




Automatic Liquid and Vapor Recovery

4x
Faster

Up to 4x Faster **Certified Recovery Rates** compared to other units in its class

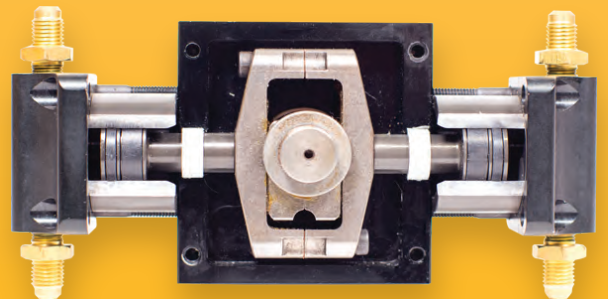

Refrigerant-Isolated Crankcase for Maximum Reliability




High-Speed Industrial Recovery



Recovery

The G5Twin is designed to reliably pump liquid without any need for throttling, cutting down on overall recovery time.

The G5Twin is built with a high-efficiency motor and compressor along with massive airflow. This design allows for maximum pumping performance and cooling efficiency for the fastest refrigerant recovery.

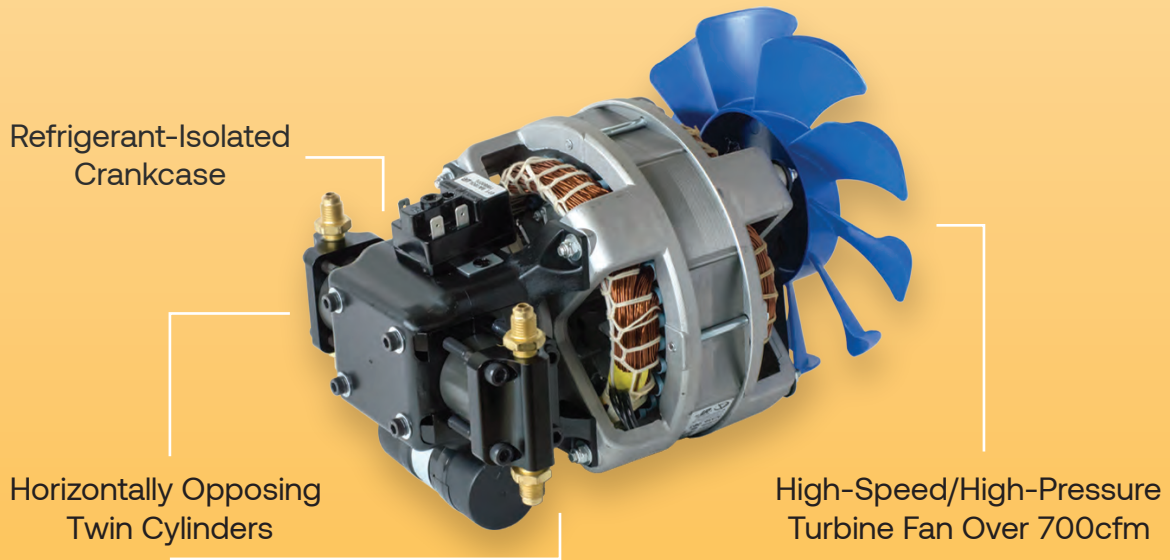

- ▶ Patented Opposing **Twin Cylinders and Twin Condensers** for ultra-fast recovery
- ▶ **Permanently-lubricated, bearing-lined crankcase** is isolated from refrigerant, eliminating bearing contamination

- ▶ Pumps **Liquid and Vapor** with no throttling
- ▶ 7-inch, 10-blade turbine fan blasts over **700 cfm of cooling air** over the twin condensers and twin cylinder heads

G5Twin Recovery Rates (per min)

Refrigerant	Push-Pull	Liquid	Vapor
R134a	15.87 lb 7.20 kg	10.14 lb* 4.60 kg*	0.46 lb** 0.21 kg**
R-22	16.62 lb 7.54 kg	10.36 lb 4.70 kg	0.62 lb 0.28 kg
R-407C	17.61 lb 7.99 kg	11.93 lb 5.41 kg	0.5 lb 0.25 kg
R410A	20.50 lb 9.30 kg	17.20 lb 7.80 kg	0.55 lb 0.25 kg

*Using high-speed direct liquid mode; 8.16 lb / 3.7 kg with standard recovery
 ** With external cooling accessory; 0.44 lb / 0.20 kg with standard recovery

G5Twin Product Specifications

Dims	11.38 in x 10.30 in x 9.40 in 289 mm x 262 mm x 239 mm
Weight	24 lbs 11 kg
Power	115 VAC, 60 Hz, 10 Amps Int'l: 230 VAC, 50 Hz, 5 Amps

Learn More At
AppionTools.com/G5Twin

