


155HF Series Single Stage Regulators

These high pressure, high flow models are designed for heavy duty cutting, industrial applications, laboratory testing, manifold installations, etc.

- Single-stage construction
- Forged brass body and housing cap
- Delrin cap bushing for smooth adjustments
- Sintered bronze inlet filter
- Piston-type construction
- 2-1/2" gauges for easy reading
- Weight: 8 lbs 10 oz (3.91 kg)
- Conforms to CGA E-4 standard for gas pressure regulators



155HF

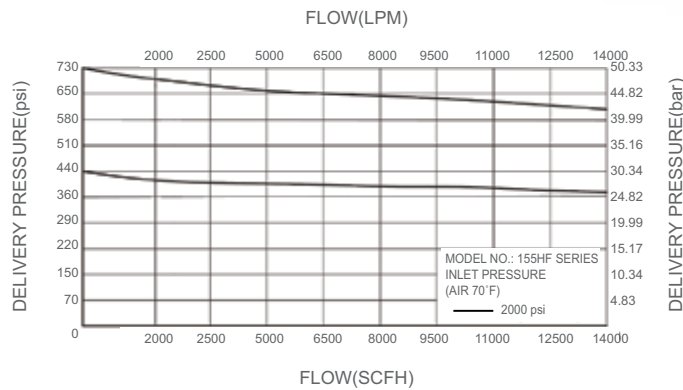

Model Number	Gas Service	Maximum Inlet Pressure	Maximum Delivery Pressure	Inlet Gauge	Outlet Gauge	Inlet Connection*	Outlet Connection
155HFX-800	OXYGEN	3000 psi (207 bar)	500-800 psi (35-55 bar)	2-1/2", 4000 psi (280 bar)	2-1/2", 2000 psi (138 bar)	BS3, G 5/8"-RH(M)	G 3/8" - RH(M)
155HFIN-600	Ar, He, N ₂	3000 psi (207 bar)	500-800 psi (35-55 bar)	2-1/2", 4000 psi (280 bar)	2-1/2", 2000 psi (138 bar)	BS3, G 5/8"-RH(M)	G 3/8" - RH(M)

*Inlet connection and outlet connections can be fitted according to country specific standards. Please confirm when ordering.