


LYE DUCTILE IRON

FLANGED DISMANTLING JOINT

(DN80 - DN600)

MODEL: **LYE** 784

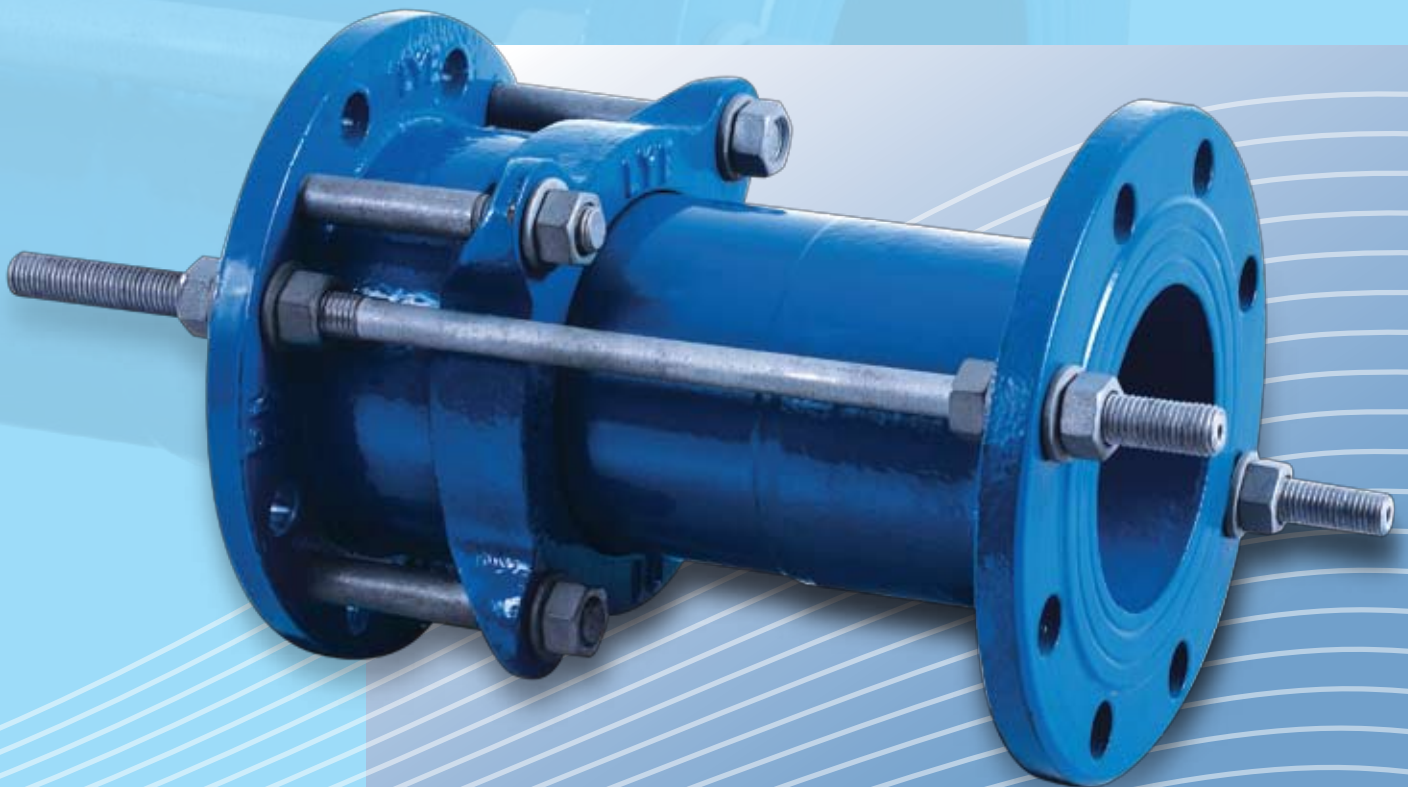

The **LYE** Flanged Dismantling Joint is a double-flanged fitting that allows longitudinal adjustment in flanged pipe systems.




The Brand Of Reliability

LYE MANUFACTURING SDN. BHD. (32836-H)


Manufacturer of Valves, Hydrants, Joints, Fittings & Manhole Covers.





LYE DUCTILE IRON

FLANGED DISMANTLING JOINT

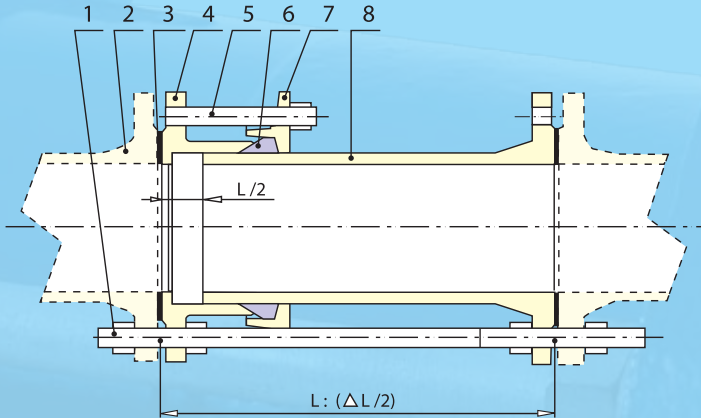

Materials for Main Parts

No.	Description	Material	Grade
1	Bolts & Nuts	Galvanized Steel	A3
2	Flange	-	-
3	Rubber Seal	Rubber	EPDM
4	Flange Adaptor	Ductile Iron	500/7
5	Bolts & Nuts	Galvanized Steel	A3
6	Rubber Ring	Rubber	EPDM
7	Gland	Ductile Iron	500/7
8	Flange Spigot	Ductile Iron	500/7

**Overall Dimensions for
LYE Flanged Dismantling Joint**

DN	Length (mm)	L-Adjust Length (mm)	Flange Standard	OD (mm)
80	300	50	PN16	98
100	300	50	PN16	118
150	450	50	PN16	170
200	600	50	PN16	222
250	600	50	PN16	274
300	600	50	PN16	326
350	600	50	PN16	378
400	600	50	PN16	429
450	600	50	PN16	480
500	600	50	PN16	532
600	600	50	PN16	635

Please Note: Technical data provided is indicative only and may be subject to change without notice

When fitting valves and equipment there is often a problem bridging the gap between two mating flanges. This system gives an axial movement to accommodate such a problem. It provides adjustability to your equipment installations by combining a Flanged Coupling Adaptor and a Flanged Spigot into one assembly. Longitudinal adjustment is provided by the telescoping action of the Spigot inside the Flanged Coupling Adaptor. When final installation position is achieved, the bolting procedure for the Flanged Coupling Adaptor and the Flanged Spigot can be completed.

Features & Benefits

Full range available DN80 - DN600

- For application where a full-face flange is required i.e. wafer type valves, the flange of the spigot piece provides a full flange sealing area.

Longitudinal adjustment

- Accommodates up to 50mm/2" longitudinal adjustment.
- Can be locked at required length with tie bars supplied.
- Allows for fast and simple maintenance of valves and pumps.
- No need for complex anchoring systems.

Outstanding protection from corrosion

- The **LYE** Flanged Dismantling Joint is coated in Fusion Bonded Epoxy (FBE) which makes it well equipped to withstand any storage, site and corrosion damage.



LYE MANUFACTURING SDN. BHD. (32836-H)
Manufacturer of Valves, Hydrants, Joints, Fittings & Manhole Covers.
 Lot 1844, Jalan KPB 8, Kampung Baru Balakong, 43300 Kajang, Selangor Darul Ehsan, Malaysia.
FACTORY: Tel : 603 - 8961 1623, Fax : 603 - 8961 1092
SALES: Tel : 603 - 6140 3131 (Hunting Line) Fax : 603 - 6140 5858
WEBSITE: www.lye.com.my
EMAIL: enquiry@lye.com.my

