




**LYE DUCTILE IRON**

# GLOBE SILENT CHECK VALVE

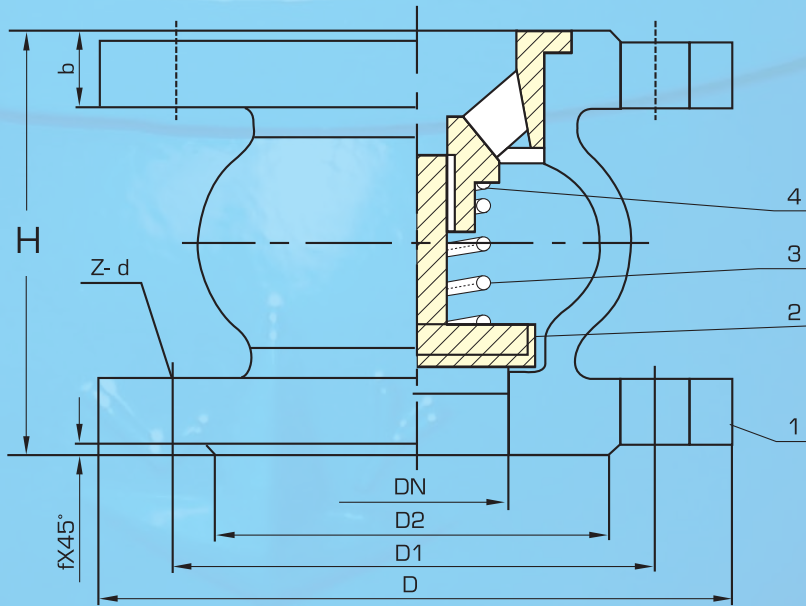

No	Part name	Material	PCS
1	Body	DUCTILE IRON	1
2	Disc	DUCTILE IRON / EPDM RUBBER	1
3	Spring	65Mn	1
4	Collar	DUCTILE IRON	1


## HT200 PN16

DN	D	D1	D2	H	b	f	Z - d
2"	ø165	ø125	ø 99	100	19	3	4 -ø19
2 1/2"	ø185	ø145	ø118	120	19	3	4 -ø19
3"	ø200	ø160	ø132	140	19	3	8 -ø19
4"	ø220	ø180	ø156	170	19	3	8 -ø19
5"	ø250	ø210	ø184	200	19	3	8 -ø19
6"	ø285	ø240	ø211	230	19	3	8 -ø23
8"	ø340	ø295	ø266	300	20	3	12 -ø23
10"	ø400	ø355	ø319	370	22	3	12 -ø28
12"	ø455	ø410	ø370	410	24.5	4	12 -ø28

- **LYE** Silent Check Valve is the valve of choice in applications where silent operation is of major concern. Its short linear stroke and spring return action automatically closes the disc at zero flow, which prevents flow reversal and water hammer.
- Guided spring loaded disc with drop tight closure.
- Designed for a minimum open area equal to 110% of the pipe size.
- Fusion bonded epoxy coating is standard.
- Can be used in both horizontal and vertical positions.



**LYE MANUFACTURING SDN. BHD. (32836-H)**  
**Manufacturer of Valves, Hydrants, Joints, Fittings & Manhole Covers.**  
 Lot 1844, Jalan KPB 8, Kampung Baru Balakong, 43300 Kajang, Selangor Darul Ehsan, Malaysia.  
**FACTORY:** Tel : 603 - 8961 1623, Fax : 603 - 8961 1092  
**SALES:** Tel : 603 - 6140 3131 (Hunting Line) Fax : 603 - 6140 5858  
**WEBSITE:** www.lye.com.my  
**EMAIL:** enquiry@lye.com.my

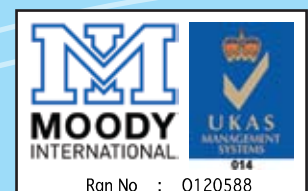

Rgn No : Q120588  
 ISO 9001:2008 Certified