



# WOODSHIELD

TRUE WOOD PROTECTION





# GOLDEN SAND

The golden tone of the forest, symbolizes the richness and toughness of the woods. Truly a fruit of life.

*Matt*

*Gloss*




Autumn Oak

9087


*Matt*

*Gloss*

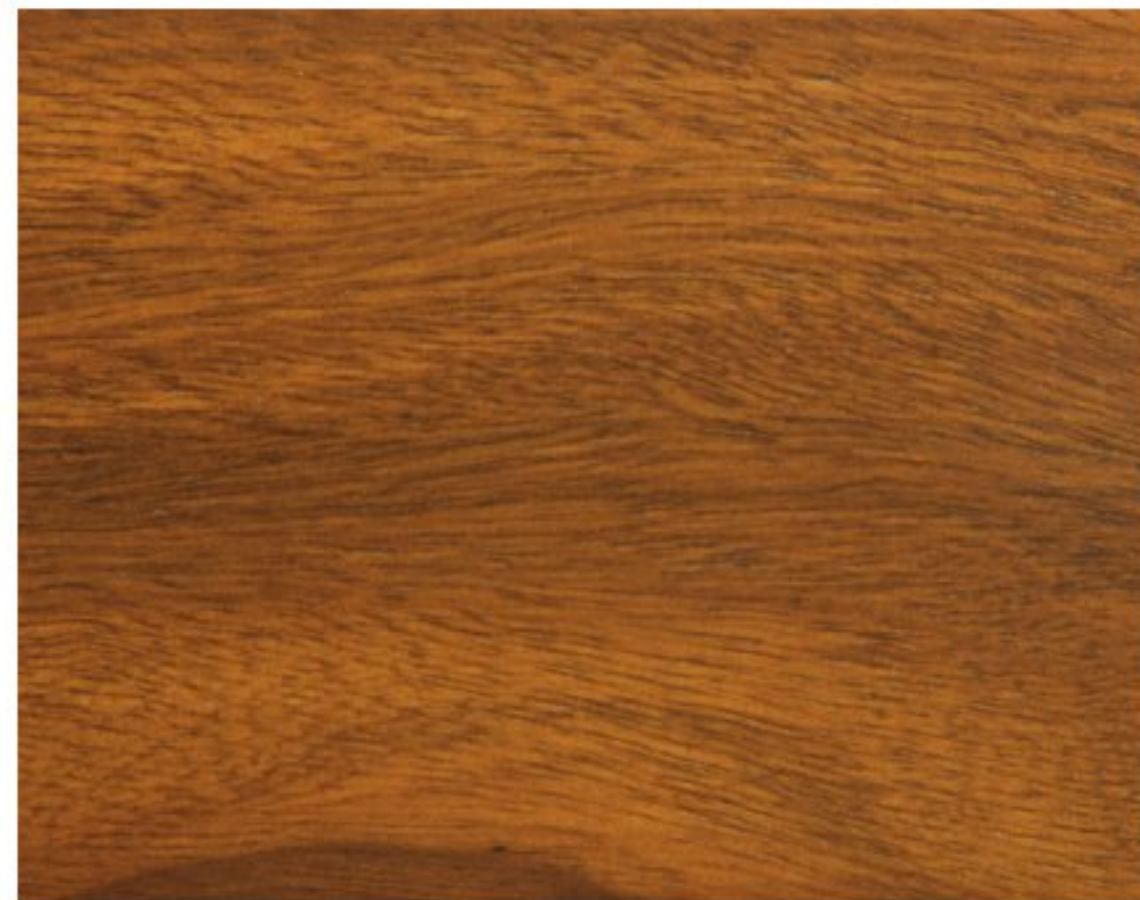


Teak

9088

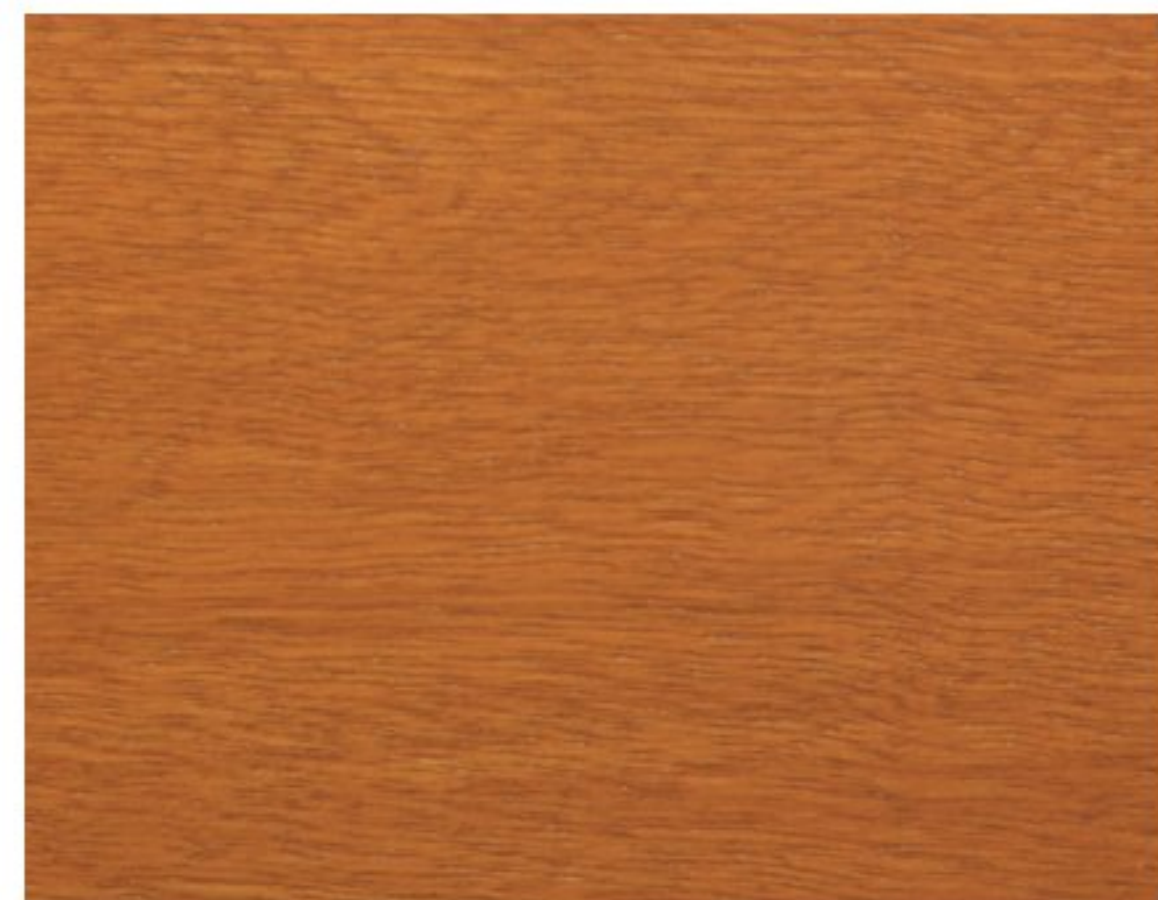


Golden Pine

9089

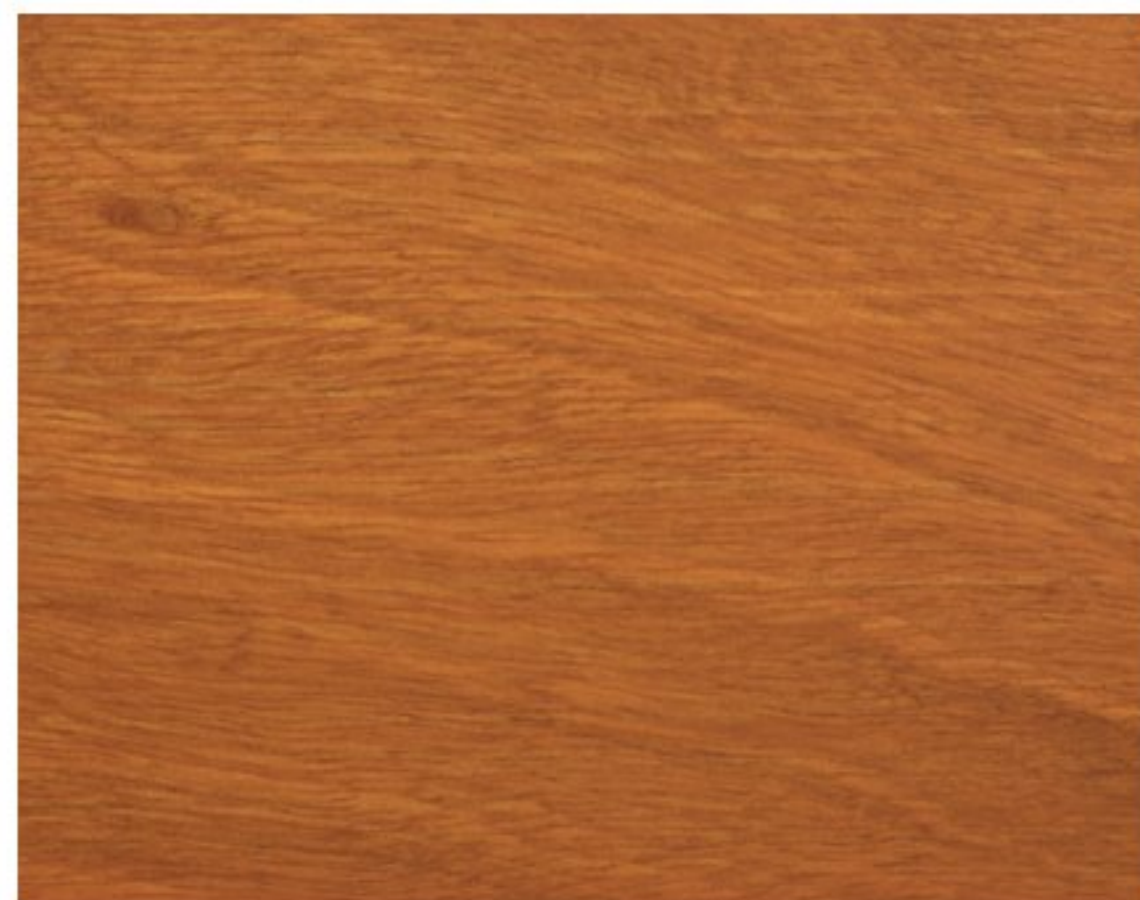


Maize

9090

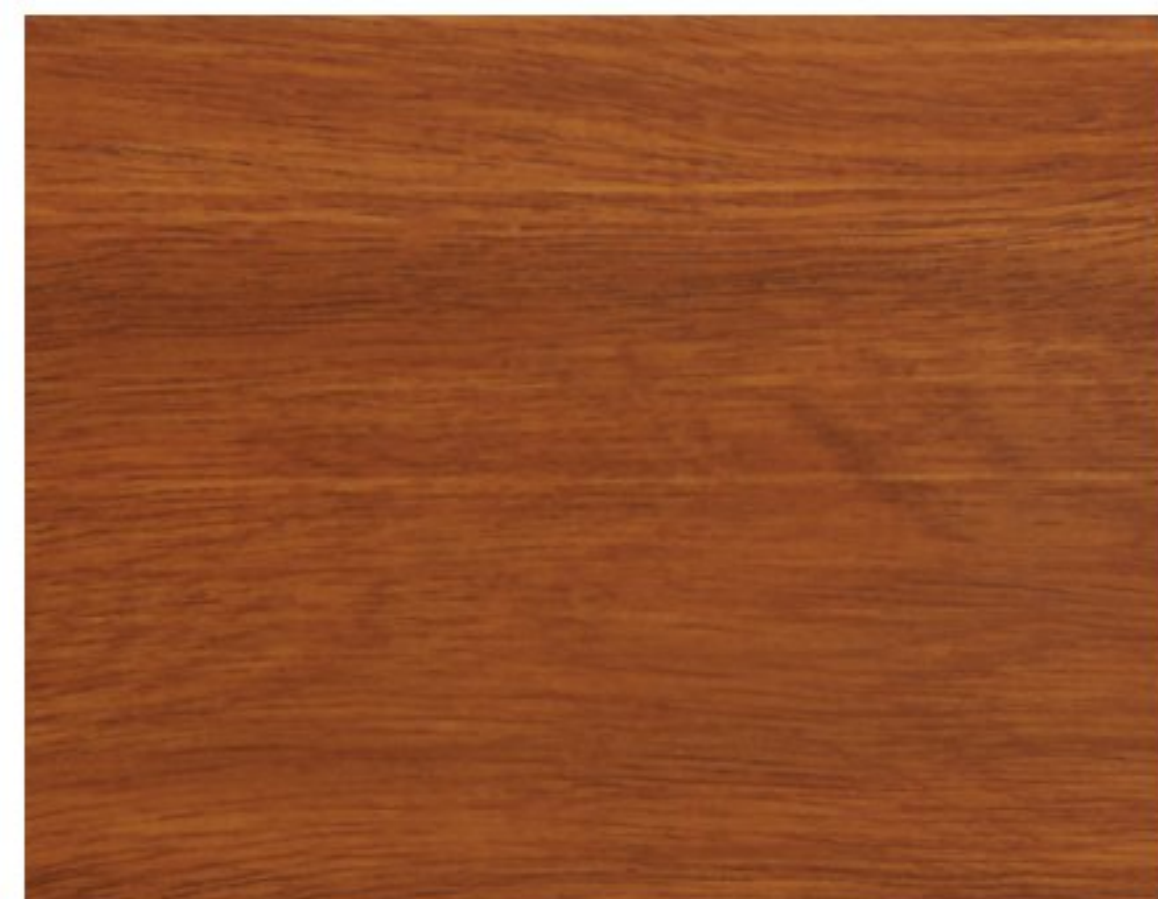


Chestnut

9091

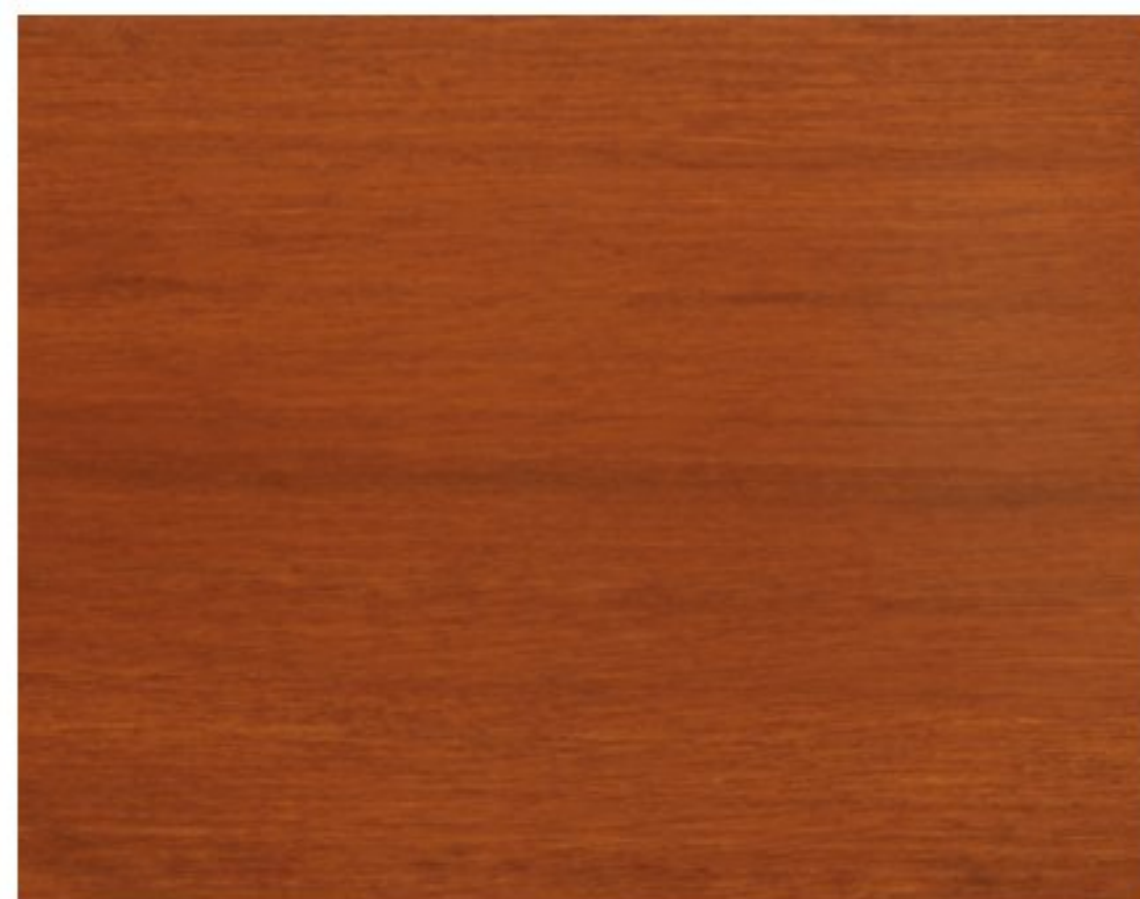


Maple

9092

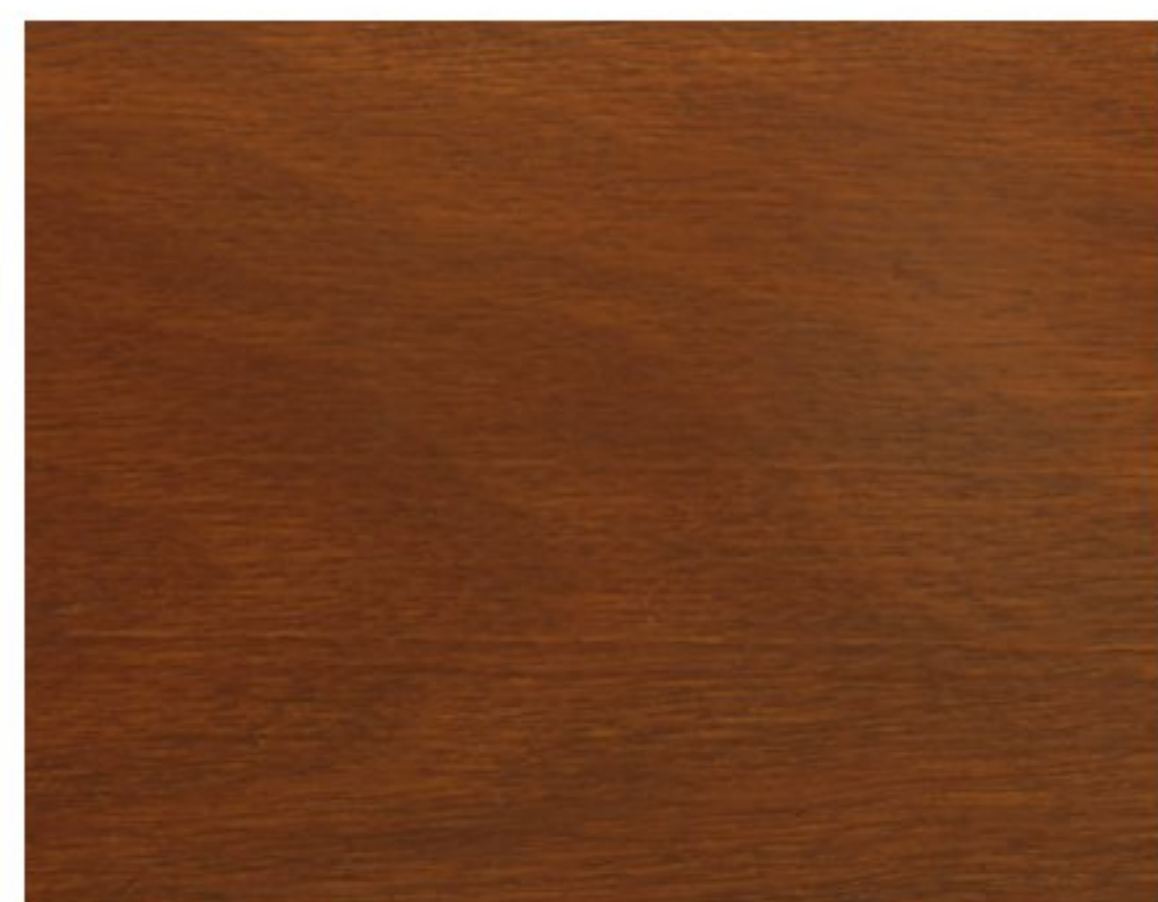



Almond

9093

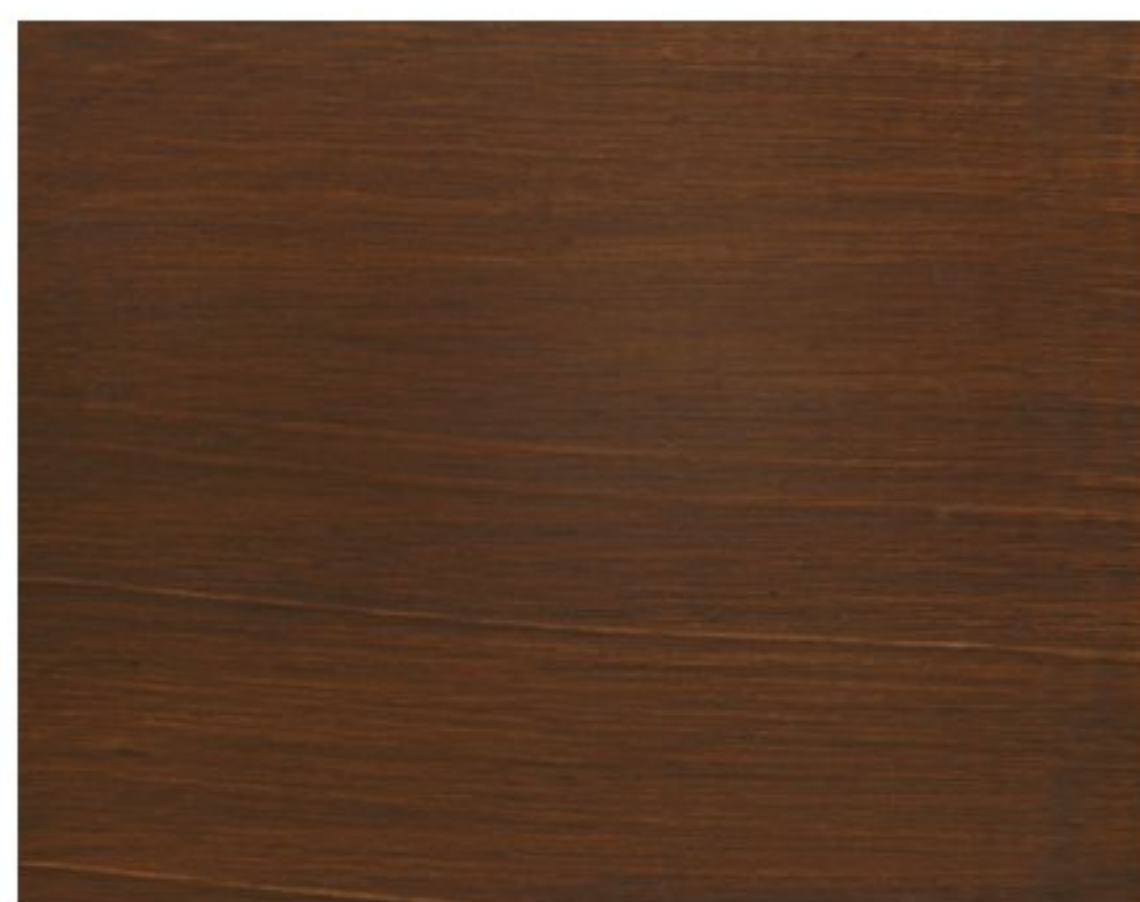

Walnut

9094

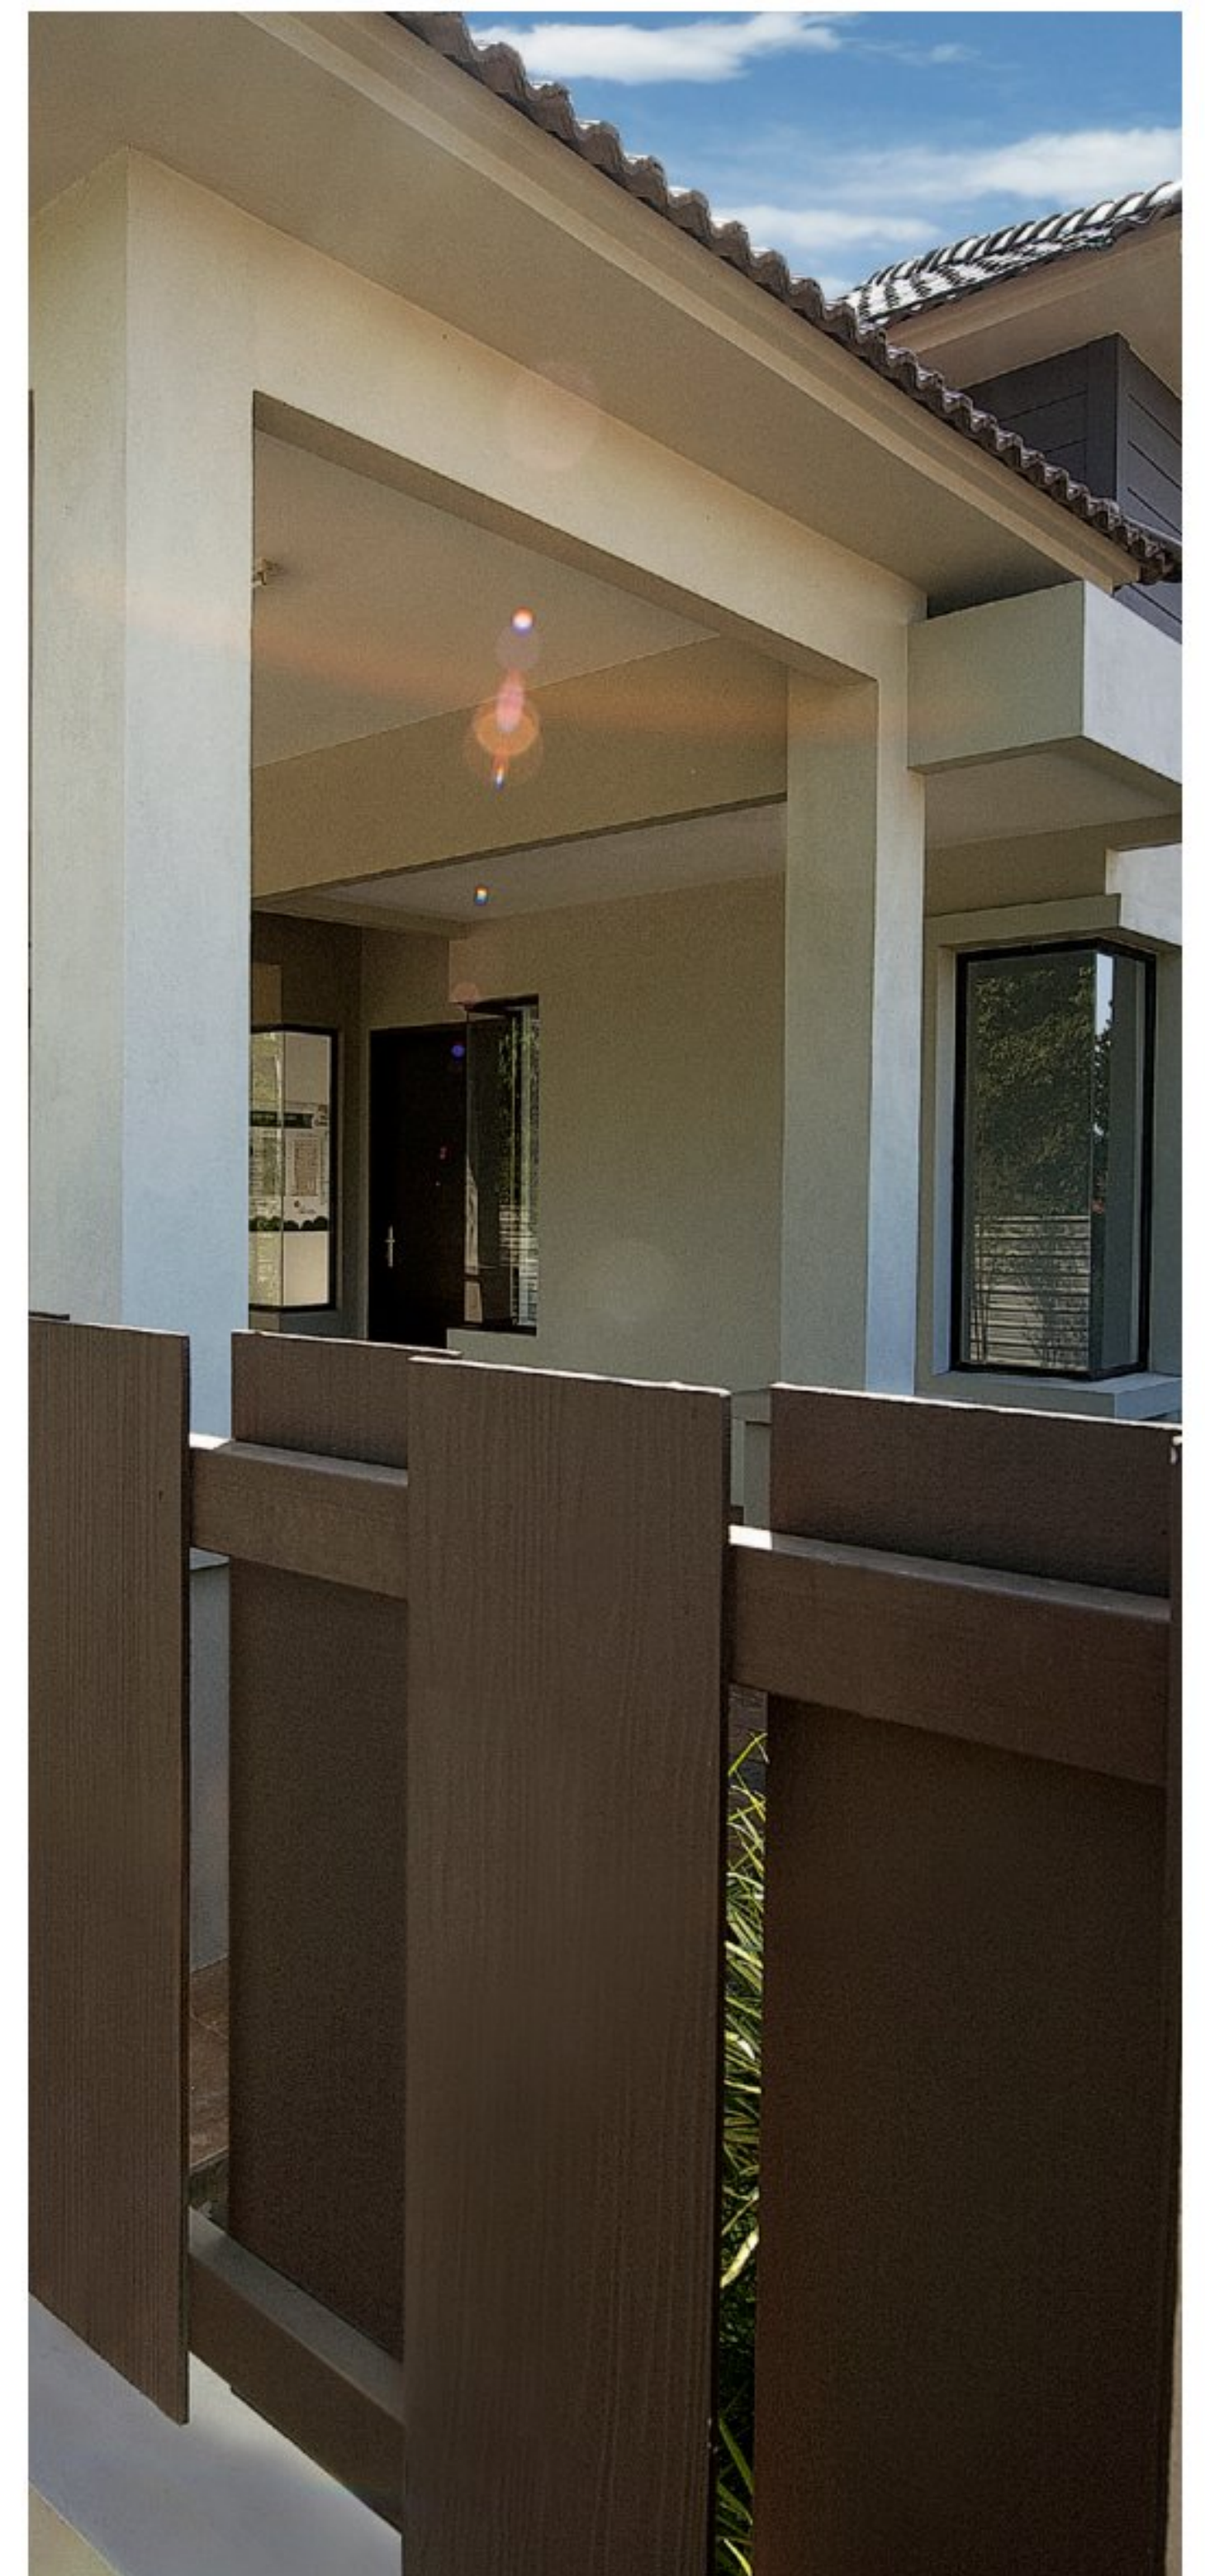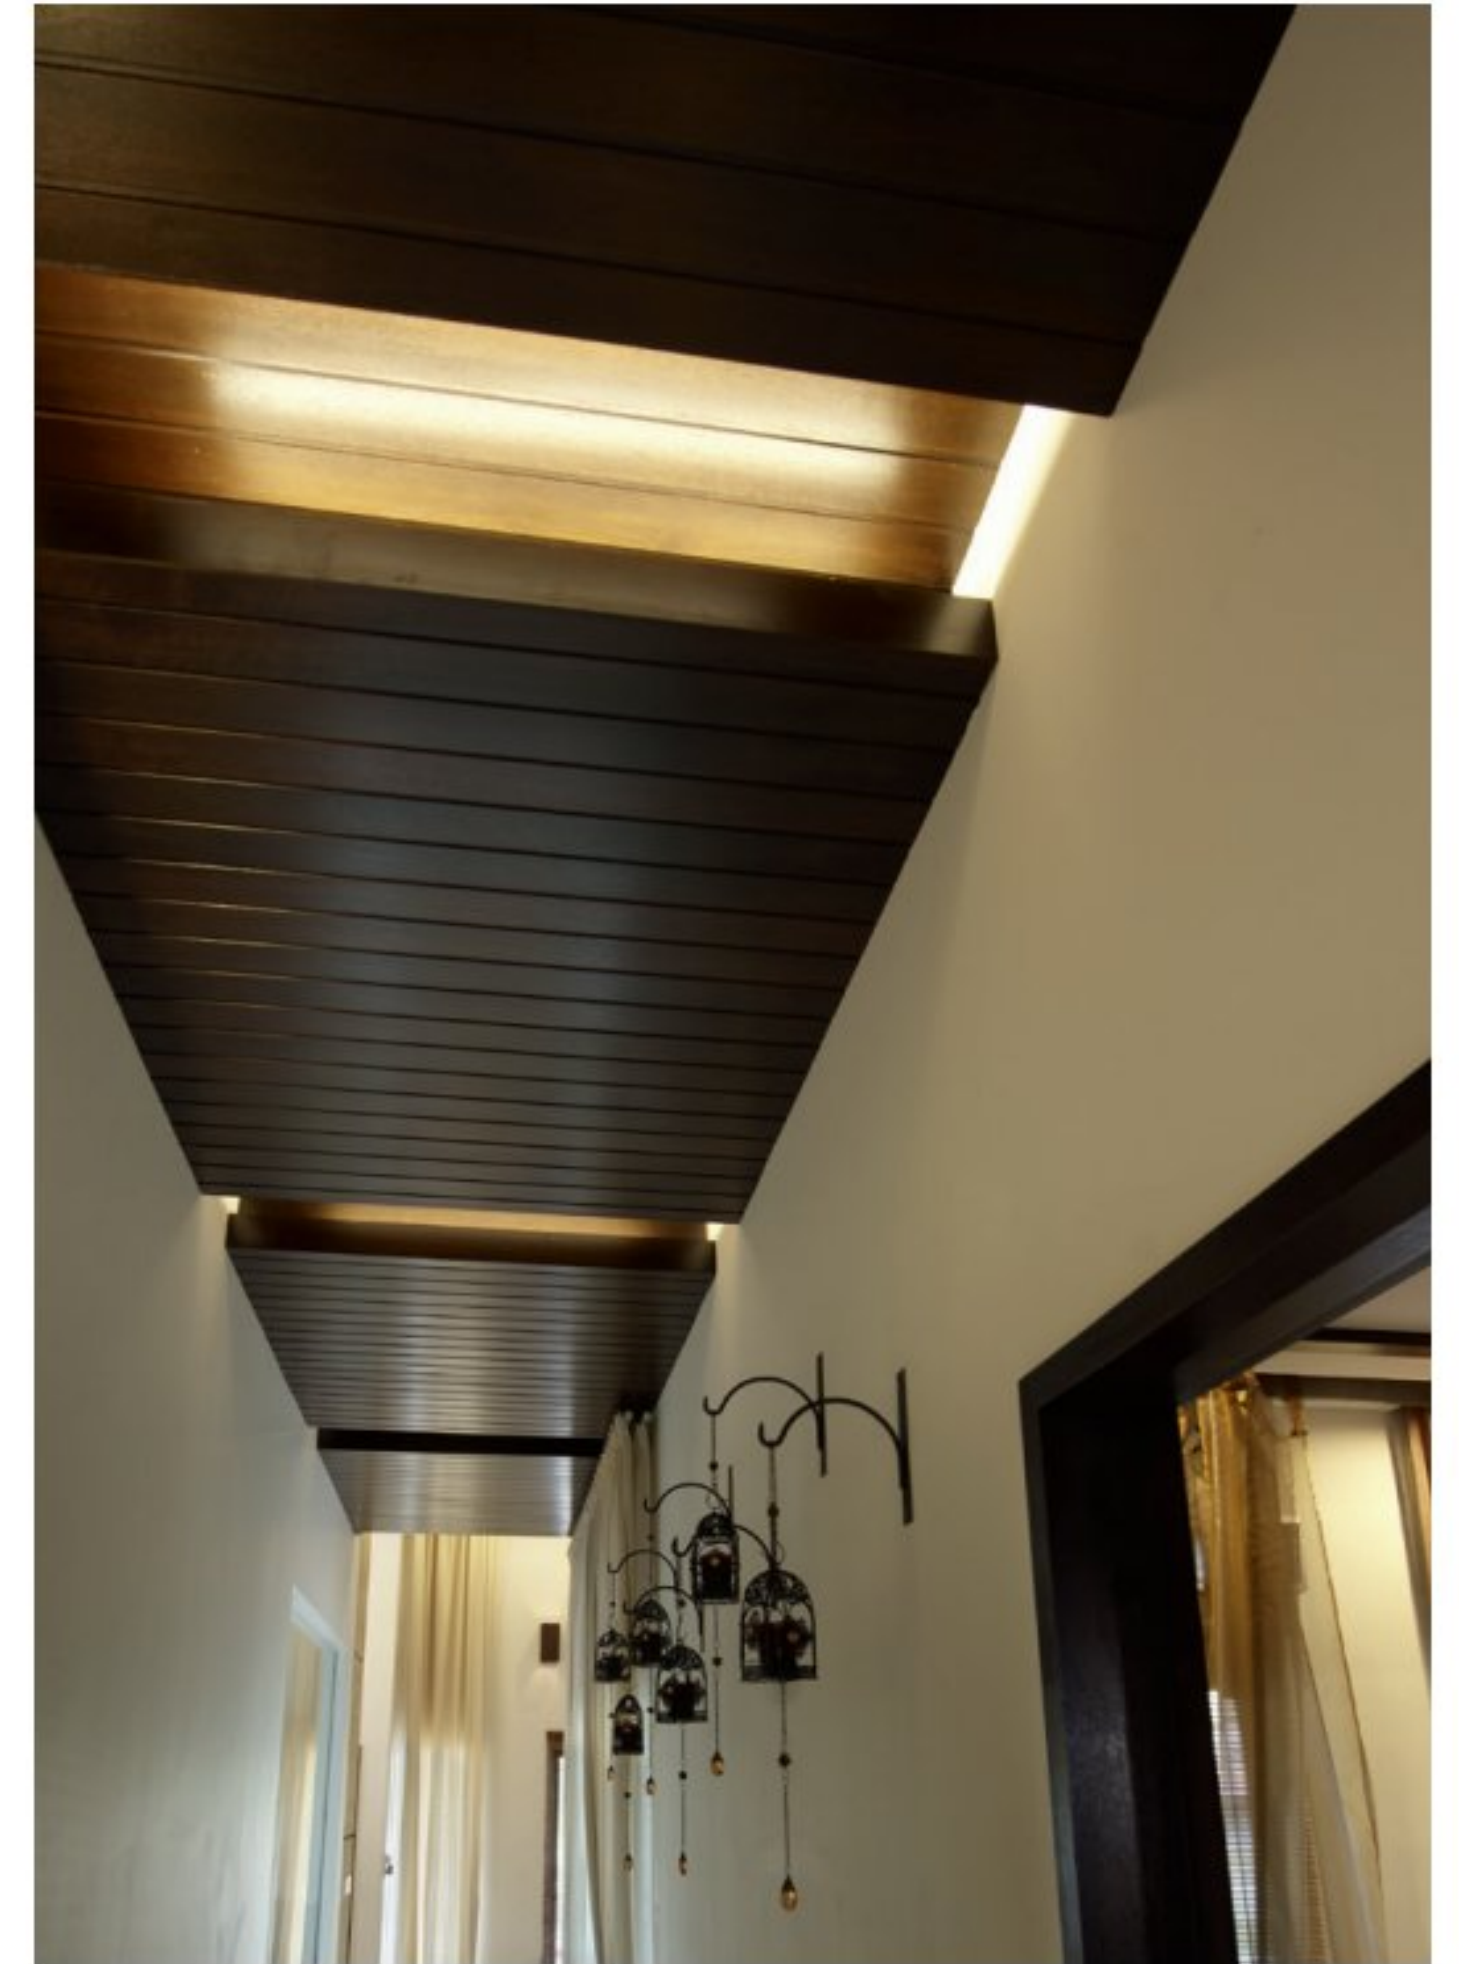

"Colours shown represent Jotun Woodshield on meranti wood. All colours reproduced are shown as close to actual colours as modern printing techniques allow. Final result varies depending on colour, texture, grain, porosity and type of wood. Where colour matching is critical, an applied sample is recommended."



## FOREST WALK

Natural red and green elements of the forest path inspire ways to beautify the timber grain.

*Matt*

*Gloss*



Mint

9712

*Matt*

*Gloss*



Parsley

9713



Clover

9714




Cedar

9138




Cherry Red

9139

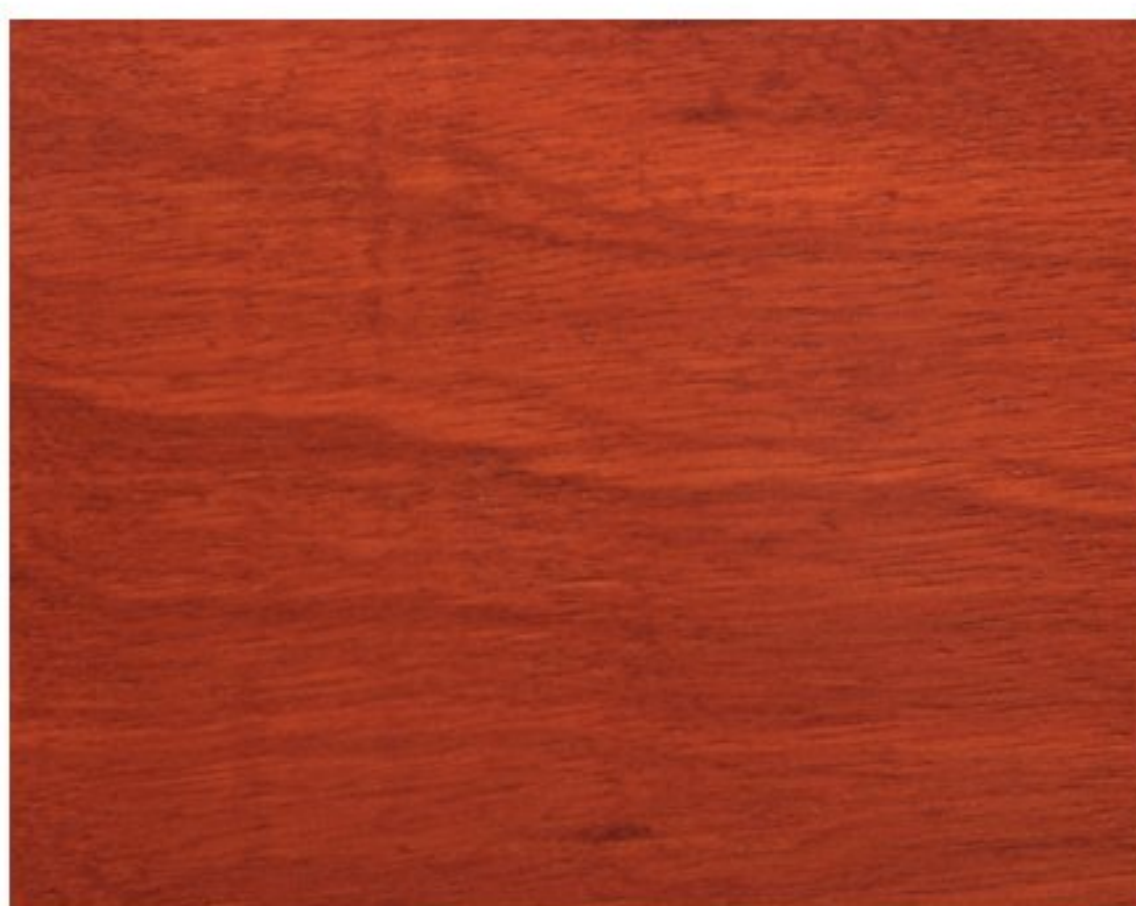


Mahogany

9140

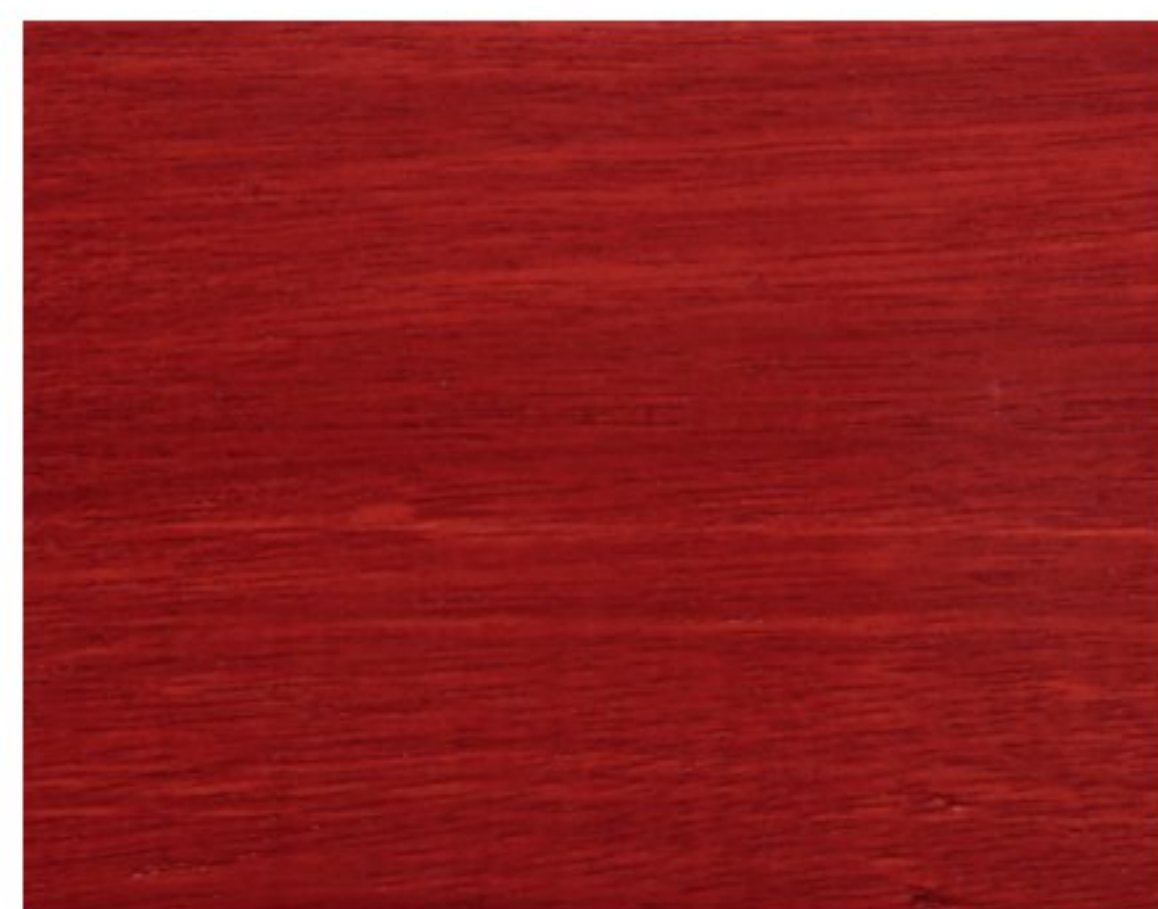

Rosewood

9141

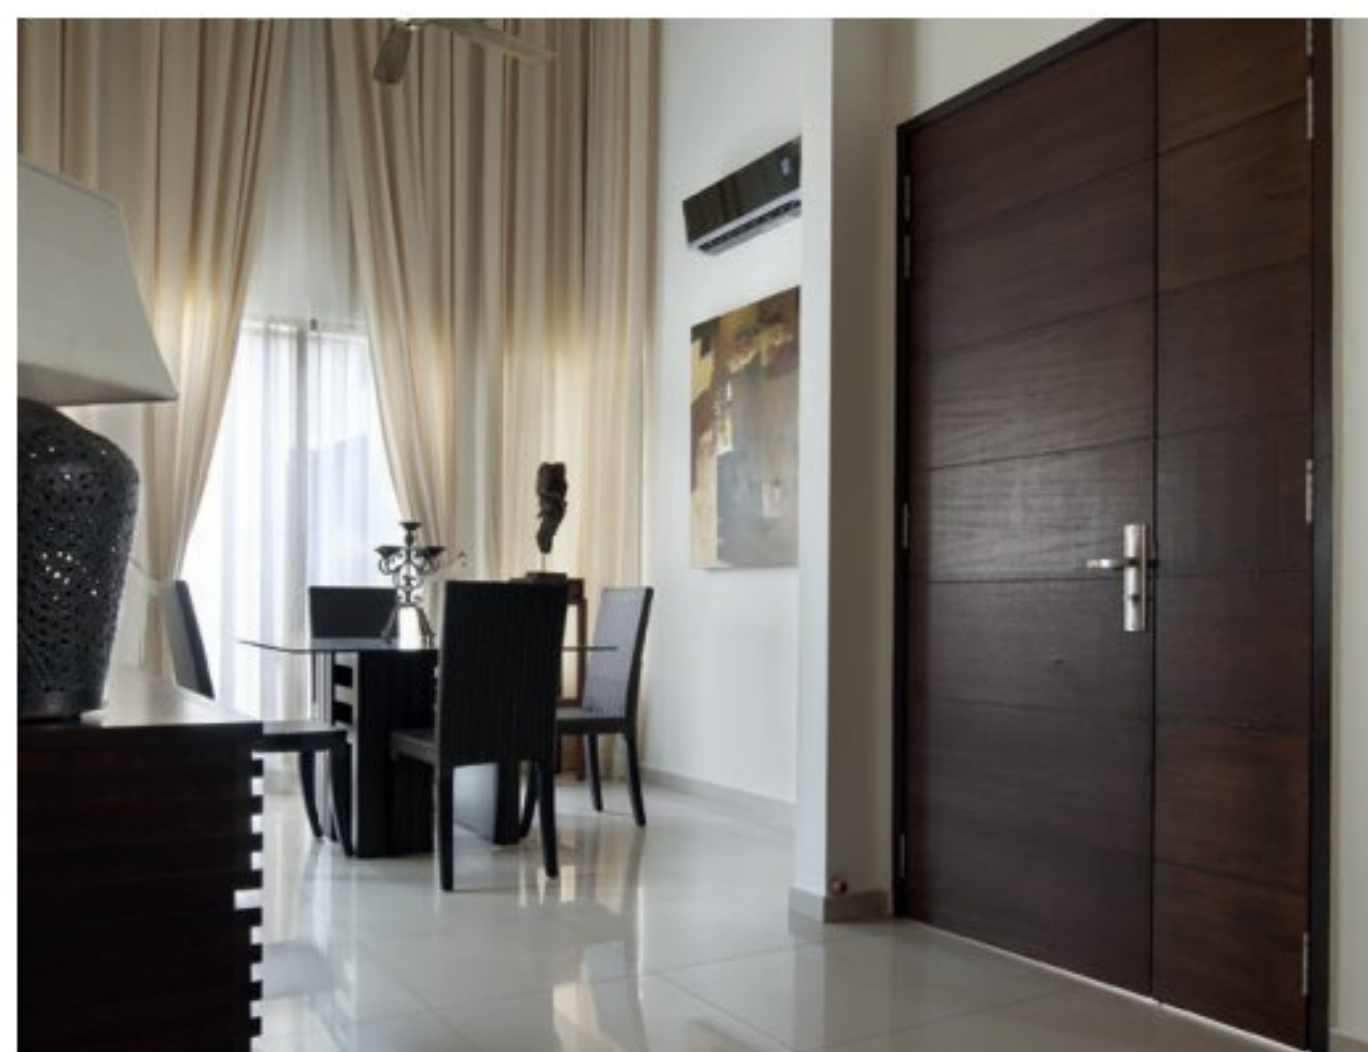


## VARNISH

Transparent finish captures and preserves the natural elegance of the earthy wood.

*Matt*

*Gloss*

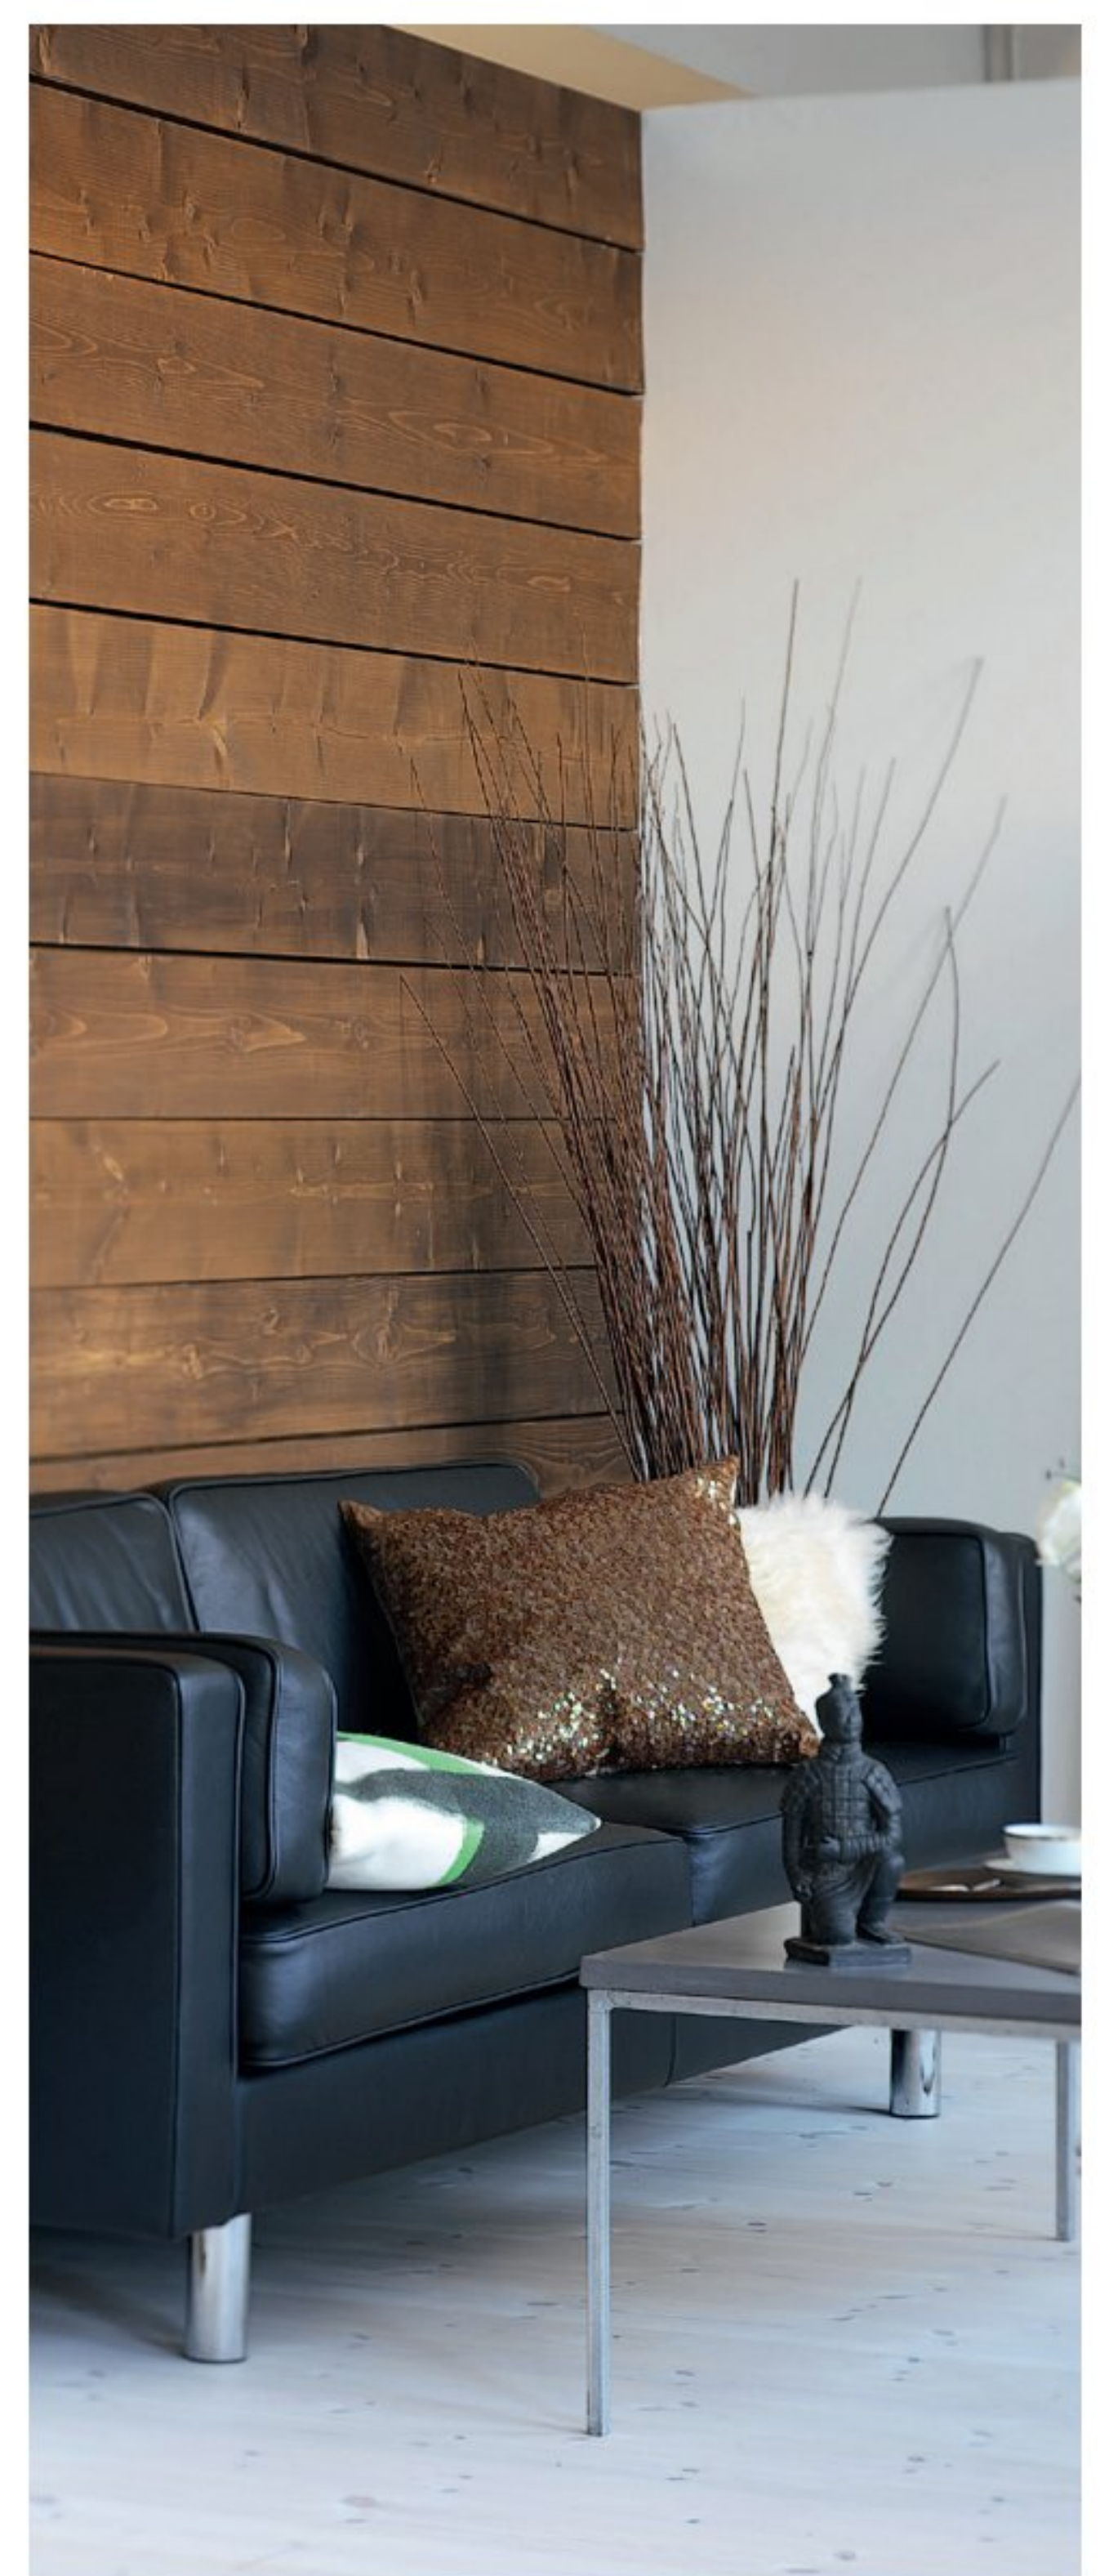





**JOTUN**

*Matt*

*Gloss*



Bronze Yellow

9095

*Matt*

*Gloss*



Sunset

9142


*Matt*

*Gloss*



Acacia

9143

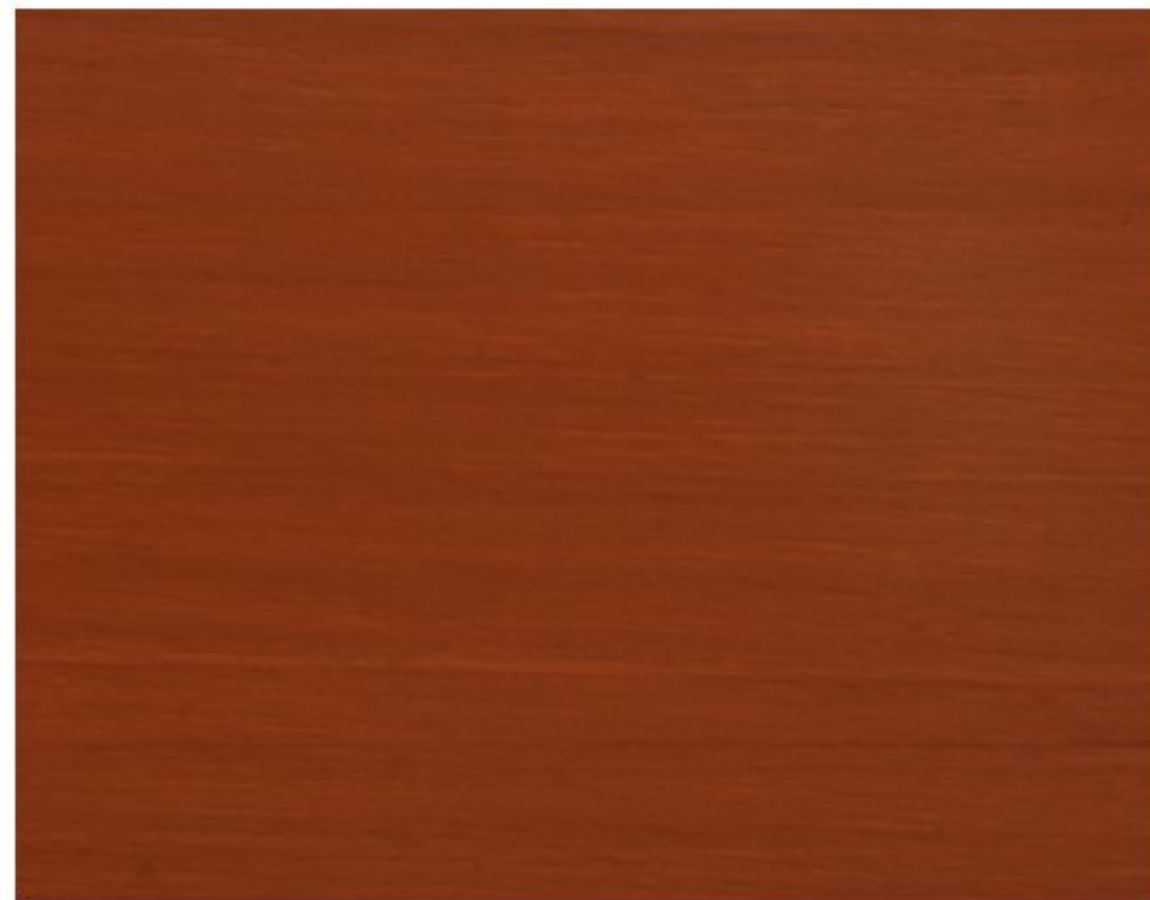

Nyatoh

9144



Buckeye

9145




Palisander

9146



Carbon Grey

9147

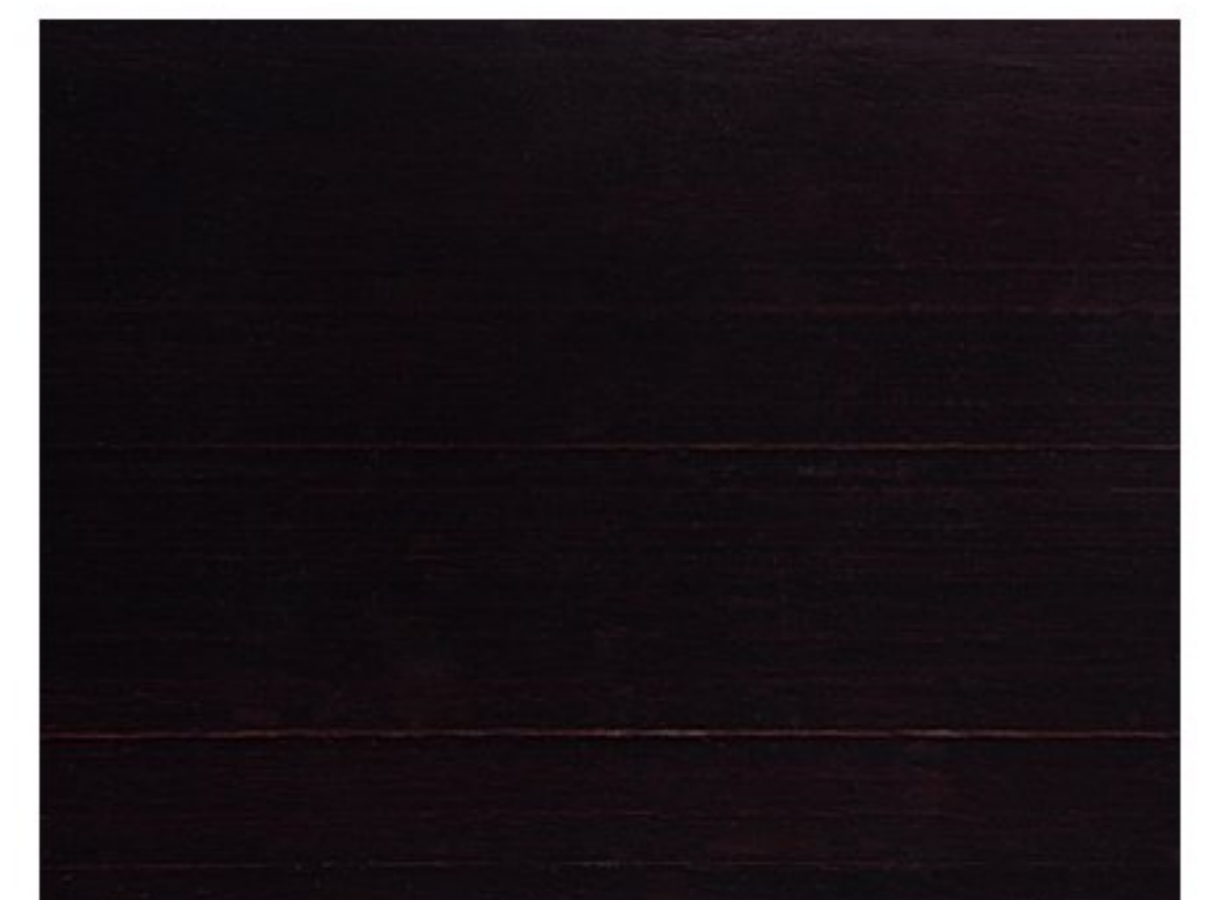

Ebony

9096

## SEMI-OPAQUE SHADES

Inspirations from season change, colours from spring to fall; opaque shades bestow solid colour textures that are easily simulated and sustained for years to come.





# WOODSHIELD

## TRUE WOOD PROTECTION

### Woodshield Exterior



Woodshield Exterior has been specifically formulated with 2X UV Protection, good flexibility and deep penetration into the wood. It protects the wood 2X longer than conventional wood finish products.

Suitable for all exterior wood such as doors, trims, frames, trellis, fences, railings, roofs, windows and balconies.

Available in Multicolor Tintable Stains and Varnish, in Gloss and Matt



#### 2X Longer Performance

- Provide protective barrier against harsh weather for longer lasting, durable wood protection.



#### 2X UV Protection

- Minimise colour fading and protection against wood crack, peel and erosion from sunlight to save time and money on maintenance.



#### Low Odour

- Painting made pleasant, thanks to less smell during and after application.







## Woodshield Deck



Woodshield Deck is the ultimate protection for wood surfaces that are exposed to the elements as well as frequent wear and tear. It provides a tough, scratch resistant film that is flexible enough to meet wood expansion and contraction requirements.

Suitable for all exterior wooden decks, interior wooden floors/parquet, outdoor/garden furniture and all wood fixtures exposed to frequent use.

Available in Multicolor Tintable Stains and Varnish, in Gloss and Matt



### Scratch Resistance

- Reduce visible scratches and marks for enduring natural wood beauty without need for frequent wood finishing maintenance.



### 2X UV Protection

- Minimise colour fading and protection against wood crack, peel and erosion from sunlight to save time and money on maintenance.



### Fast Drying

- Convenient and quick drying solution that saves time, energy and manpower.



### Low Odour

- Painting made pleasant, thanks to less smell during and after application.

## Additional Features for All Woodshield Range



### Good Flexibility

- Withstands constant wood expansion and contraction that minimises undesired effects like cracking; therefore, protecting and preserving wood investment.



### Anti Fungal

- Prevents unsightly growth of surface fungus to maintain beautiful, healthy wood.



### Water Resistance

- Prevents moisture absorption for prolonged wood life and preserved natural warmth and beauty.



### Heavy Metals Free

- Non-hazardous and environmentally-friendly without compromising performance and beauty.
- Does not contain Lead, Mercury, Chromium, Cadmium and Arsenic.



# WOODSHIELD

## TRUE WOOD PROTECTION

### Painting Guide

Wood surface must be suitably prepared, clean, dry and free from traces of dust, dirt, wax and grease. The moisture content should not exceed 15% prior to coating.

#### STEP 1



- Sand the surface of the wood thoroughly with #400 grit sand paper.

#### STEP 2



- Wipe the wood surface with a cloth dampened with Jotun Thinner No.2 to remove dust and particles. Allow it to dry fully before painting.

#### STEP 3



- Apply 1 coat of Woodshield. Please refer below table for recommended recoating time.

Step 4: Repeat steps 1, 2, 3 using #600 grit sand paper after 1st coat of Woodshield.

#### For new wood

Step 5: Repeat again steps 1, 2, 3 using #1000 grit sand paper after 2nd coat of Woodshield.

	Woodshield Exterior	Woodshield Deck
Drying Time (Hours)	3-4	1-2
Recoating Time (Hours)	8	4
Coverage	14-16m <sup>2</sup> /litre	12-14m <sup>2</sup> /litre
Thinning	Dilution is not necessary for brush and roller application. If required, dilute with Jotun Thinner No. 2 (max 5%). For spray application, dilute with Jotun Thinner No. 2 (max 15%).	
Application	Brush, roller or air spray.	
Cleaning	Clean brushes and tools with Jotun Thinner No. 2.	



# WOODSHIELD

## TRUE WOOD PROTECTION



### EXTERIOR

### DECK

#### TECHNOLOGY

Deep Penetrating Resin with Advanced UV Absorbers

Urethane Alkyd Technology with Advanced UV Absorbers



2X LONGER PERFORMANCE



2X UV PROTECTION



FAST DRYING



LOW ODOUR



SCRATCH RESISTANCE



GOOD FLEXIBILITY



ANTI FUNGAL



WATER RESISTANCE



HEAVY METALS FREE



Paint for iconic buildings and beautiful homes

JOTUN PAINTS (MALAYSIA) SDN. BHD. (824636-K)  
 Lot 7, Persiaran Perusahaan, Seksyen 23, 40300 Shah Alam, Selangor, Malaysia. Tel: +603 5123 5500  
[jotun.com.my](http://jotun.com.my)

