



Gas/Light Oil - Gas/Gasolio



| 2 STAGES BISTADIO | PROGRESSIVE & MODULATING | kcal/h | | kW | | |
|----------------------|-----------------------------|---------|-----------|----------|------|----|
| | | min | max | min | max | |
| K 3/2 | - | 100.000 | 200.000 | 63,9/116 | 232 | 1F |
| K 4/2 EVO 2 | K 4/M/2 EL EVO 2 | 200.000 | 450.000 | 116/232 | 523 | 3F |
| K X 5/2 * | K X 5/M/2 EL * | 350.000 | 730.000 | 140/410 | 850 | |
| K 6/2 | K 6/M | 500.000 | 1.000.000 | 200/581 | 1163 | |
| K 7/2 | K 7/M * | 774.000 | 1.500.000 | 300/900 | 1744 | |

* Available also in Low NOx version
 * Disponibili anche in versione Low NOx

FIRING RATES / OVERALL DIMENSIONS (mm) - CAMPO DI LAVORO / DIMENSIONI (mm)

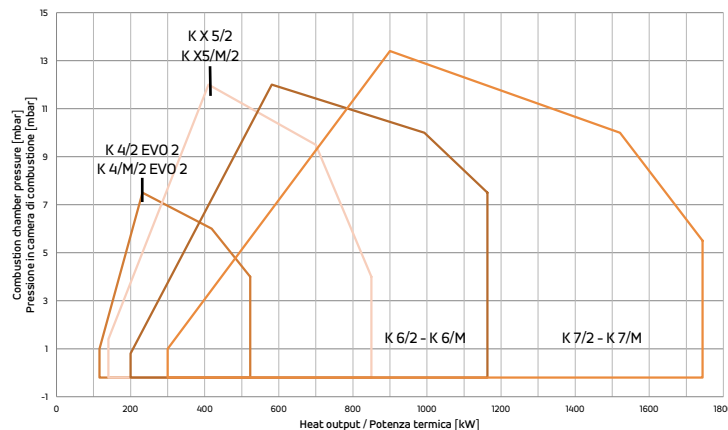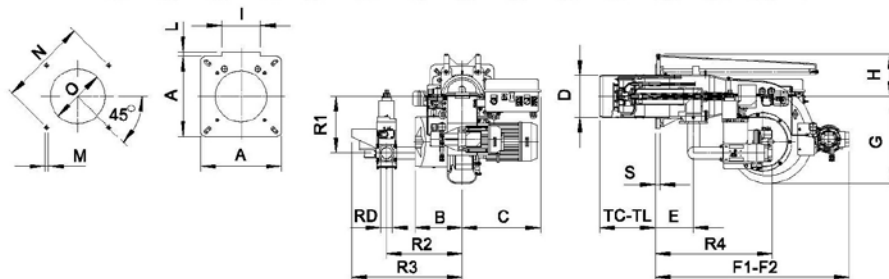

* Suggested/Consigliato

| MODEL MODELLO | A | B | C | D | E | F1 | F2 | G | H | I | L | M | N min | N max | O min* | O max | TC | TL | S | R1 | R2 | R3 | R4 | RD |
|---------------------------|-----|-----|-----|-----|-----|------|------|-----|-----|-----|----|-----|----------|----------|-----------|----------|-----|-----|----|-----|-----|-----|-----|--------|
| K 3/2 - D1" - S | 200 | 188 | 358 | 138 | 98 | 493 | - | 327 | 110 | 0 | 0 | M10 | 205 | 226 | 150 | - | 250 | 350 | 18 | 171 | 280 | 411 | 354 | 1" |
| K 4/2 EVO 2 - D1" S | 200 | 188 | 345 | 150 | 99 | 734 | - | 416 | 110 | 0 | 0 | M10 | 205 | 226 | 160 | - | 250 | 350 | 20 | 193 | 280 | 338 | 431 | 1" |
| K 4/2 EVO 2 - D1" 1/4 - S | 200 | 188 | 345 | 150 | 99 | 734 | - | 416 | 110 | 0 | 0 | M10 | 205 | 226 | 160 | - | 250 | 350 | 20 | 193 | 280 | 338 | 431 | 1" 1/4 |
| K 4/2 EVO 2 - D1" 1/2 - S | 200 | 188 | 345 | 150 | 99 | 734 | - | 416 | 110 | 0 | 0 | M10 | 205 | 226 | 160 | - | 250 | 350 | 20 | 193 | 280 | 346 | 446 | 1" 1/2 |
| K 4/2 EVO 2 - D2" S | 200 | 188 | 345 | 150 | 99 | 734 | - | 416 | 110 | 0 | 0 | M10 | 205 | 226 | 160 | - | 250 | 350 | 20 | 193 | 280 | 346 | 446 | 2" |
| K X 5/2 - D1" - S | 300 | 236 | 365 | 175 | 168 | 840 | 1280 | 327 | 171 | 144 | 10 | M12 | 310 | 368 | 185 | 250 | 250 | 315 | 18 | 260 | 380 | 438 | 548 | 1" |
| K X 5/2 - D1" 1/4 - S | 300 | 236 | 365 | 175 | 168 | 840 | 1280 | 327 | 171 | 144 | 10 | M12 | 310 | 368 | 185 | 250 | 250 | 315 | 18 | 260 | 380 | 438 | 548 | 1" 1/4 |
| K X 5/2 - D1" 1/2 - S | 300 | 236 | 365 | 175 | 168 | 840 | 1280 | 327 | 171 | 144 | 10 | M12 | 310 | 368 | 185 | 250 | 250 | 315 | 18 | 260 | 536 | 430 | 576 | 1" 1/2 |
| K X 5/2 - D2" - S | 300 | 236 | 365 | 175 | 168 | 840 | 1280 | 327 | 171 | 144 | 10 | M12 | 310 | 368 | 185 | 250 | 250 | 315 | 18 | 260 | 536 | 430 | 576 | 2" |
| K 6/2 - D2" - S | 320 | 238 | 393 | 210 | 193 | 980 | 1560 | 438 | 213 | 183 | 40 | M14 | 340 | 368 | 220 | 250 | 280 | 400 | 23 | 283 | 552 | 556 | 615 | 2" |
| K 7/2 - D2" - S | 320 | 238 | 393 | 210 | 193 | 980 | 1560 | 438 | 213 | 183 | 40 | M14 | 340 | 368 | 220 | 250 | 280 | 400 | 23 | 283 | 552 | 556 | 615 | 2" |
| K 6/M - D2" - FS50 | 320 | 380 | 393 | 209 | 193 | 1037 | 1617 | 438 | 267 | 183 | 40 | M14 | 340 | 368 | 220 | 250 | 280 | 400 | 23 | 228 | 510 | 673 | 552 | 2" |
| K 6/M - DN65 - FS65 | 320 | 380 | 393 | 209 | 193 | 1037 | 1617 | 438 | 267 | 183 | 40 | M14 | 340 | 368 | 220 | 250 | 280 | 400 | 23 | 228 | 510 | 665 | 586 | DN65 |
| K 6/M - DN80 - FS80 | 320 | 380 | 393 | 209 | 193 | 1037 | 1617 | 438 | 267 | 183 | 40 | M14 | 340 | 368 | 220 | 250 | 280 | 400 | 23 | 228 | 550 | 720 | 626 | DN80 |
| K 7/M - D2" - FS50 | 320 | 380 | 393 | 209 | 193 | 1037 | 1617 | 438 | 267 | 183 | 40 | M14 | 340 | 368 | 220 | 250 | 280 | 400 | 23 | 228 | 510 | 673 | 552 | 2" |
| K 7/M - DN65 - FS65 | 320 | 380 | 393 | 209 | 193 | 1037 | 1617 | 438 | 267 | 183 | 40 | M14 | 340 | 368 | 220 | 250 | 280 | 400 | 23 | 228 | 510 | 665 | 586 | DN65 |
| K 7/M - DN80 - FS80 | 320 | 380 | 393 | 209 | 193 | 1037 | 1617 | 438 | 267 | 183 | 40 | M14 | 340 | 368 | 220 | 250 | 280 | 400 | 23 | 228 | 550 | 720 | 626 | DN80 |

F2= overall dimension with the burner out in position of maintenance
 F2= ingombro a bruciatore arretrato in posizione di manutenzione